




# OIL ANALYSIS REPORT

Sample Rating Trend

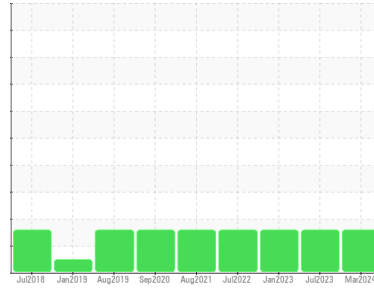

**WATER**



Machine Id  
**YORK 9609 MEDICAL CENTER DR CH 3 (S/N SHXM061650)**  
 Component  
**Refrigeration Compressor**  
 Fluid  
**YORK TYPE K (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a light concentration of water present in the oil. No other contaminants were detected in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0830585</b>   | WC0830532   | WC0713871   |
| Sample Date   | Client Info |             | <b>08 Mar 2024</b> | 26 Jul 2023 | 25 Jan 2023 |
| Machine Age   | hrs         | Client Info | <b>19717</b>       | 18313       | 16697       |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | Not Changd  | N/A         |
| Sample Status |             |             | <b>MARGINAL</b>    | MARGINAL    | MARGINAL    |

## WEAR METALS

|          | method | limit/base     | current      | history1 | history2 |
|----------|--------|----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >8 | <b>&lt;1</b> | 0        | 0        |
| Chromium | ppm    | ASTM D5185m >2 | <b>&lt;1</b> | 0        | 0        |
| Nickel   | ppm    | ASTM D5185m    | <b>&lt;1</b> | 0        | 0        |
| Titanium | ppm    | ASTM D5185m    | <b>&lt;1</b> | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >2 | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >3 | <b>2</b>     | 0        | <1       |
| Lead     | ppm    | ASTM D5185m >2 | <b>&lt;1</b> | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >8 | <b>&lt;1</b> | 0        | 0        |
| Tin      | ppm    | ASTM D5185m >4 | <b>&lt;1</b> | <1       | 0        |
| Vanadium | ppm    | ASTM D5185m    | <b>&lt;1</b> | <1       | 0        |
| Cadmium  | ppm    | ASTM D5185m    | <b>&lt;1</b> | 0        | 0        |

## ADDITIVES

|            | method | limit/base     | current      | history1 | history2 |
|------------|--------|----------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0  | <b>0</b>     | 0        | 0        |
| Barium     | ppm    | ASTM D5185m 0  | <b>0</b>     | 0        | 2        |
| Molybdenum | ppm    | ASTM D5185m 0  | <b>&lt;1</b> | 0        | 0        |
| Manganese  | ppm    | ASTM D5185m 0  | <b>&lt;1</b> | 0        | 0        |
| Magnesium  | ppm    | ASTM D5185m 0  | <b>&lt;1</b> | <1       | <1       |
| Calcium    | ppm    | ASTM D5185m 0  | <b>0</b>     | 0        | 0        |
| Phosphorus | ppm    | ASTM D5185m 5  | <b>0</b>     | <1       | 11       |
| Zinc       | ppm    | ASTM D5185m 0  | <b>0</b>     | 0        | 0        |
| Sulfur     | ppm    | ASTM D5185m 10 | <b>0</b>     | 0        | 16       |

## CONTAMINANTS




|           | method | limit/base       | current        | history1 | history2 |
|-----------|--------|------------------|----------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >15  | <b>5</b>       | 3        | 5        |
| Sodium    | ppm    | ASTM D5185m      | <b>2</b>       | <1       | 0        |
| Potassium | ppm    | ASTM D5185m >20  | <b>&lt;1</b>   | <1       | <1       |
| Water     | %      | ASTM D6304 >0.03 | <b>▲ 0.016</b> | ▲ 0.014  | ▲ 0.032  |
| ppm Water | ppm    | ASTM D6304 >300  | <b>▲ 163</b>   | ▲ 146.3  | ▲ 321.4  |

## FLUID DEGRADATION

|                  | method   | limit/base     | current      | history1 | history2 |
|------------------|----------|----------------|--------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974 0.03 | <b>0.041</b> | 0.028    | 0.04     |



# OIL ANALYSIS REPORT

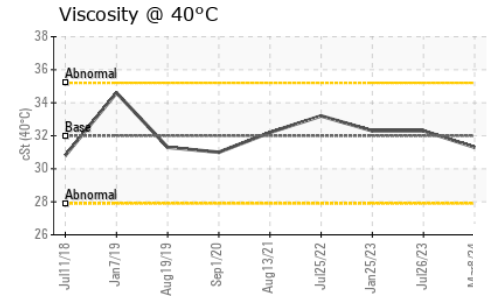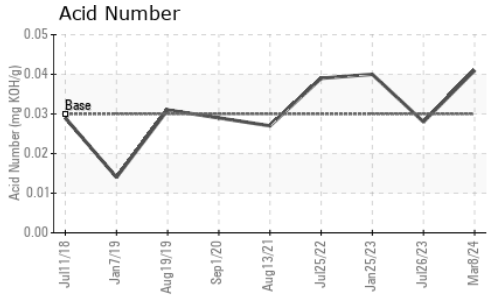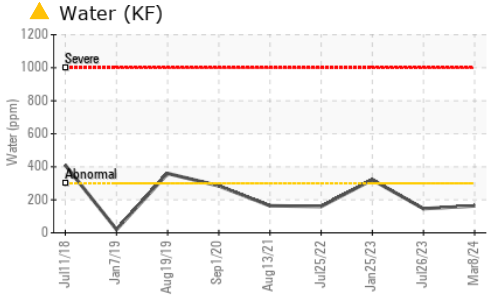





| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.03   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base     | current     | history1 | history2 |
|------------------|--------|----------------|-------------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 32.0 | <b>31.3</b> | 32.3     | 32.3     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|



## GRAPHS

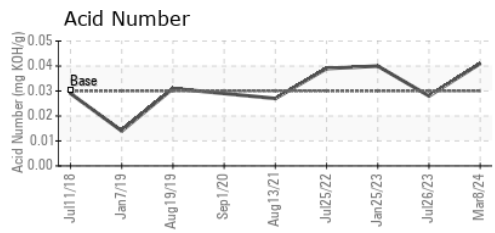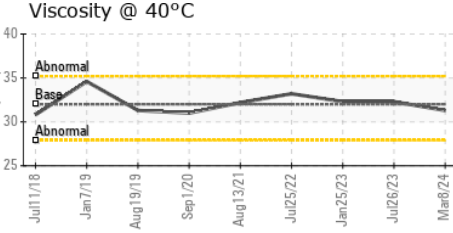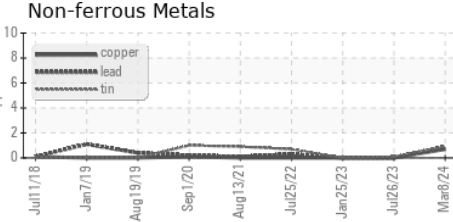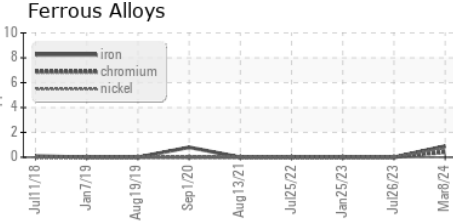

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0830585      **Received** : 25 Apr 2024  
**Lab Number** : 06160445      **Tested** : 26 Apr 2024  
**Unique Number** : 10995868      **Diagnosed** : 27 Apr 2024 - Don Baldrige  
**Test Package** : IND 2

**CDS MECHANICAL SERVICES INC**  
 1654 CROFTON BLVD, SUITE 9  
 CROFTON, MD  
 US 21114  
 Contact: DAVID BEALE  
 DBEALE@CDSMECHANICAL.NET

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)