


PROBLEM SUMMARY

Area FOOD GRADE CS46 [CAC3004430] ATLAS COPCO API631105R - HENRYS CO


Component Compressor



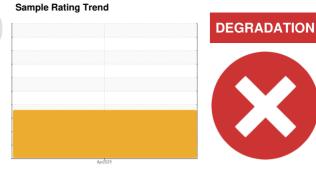

Apr17/24

COMPONENT CONDITION SUMMARY

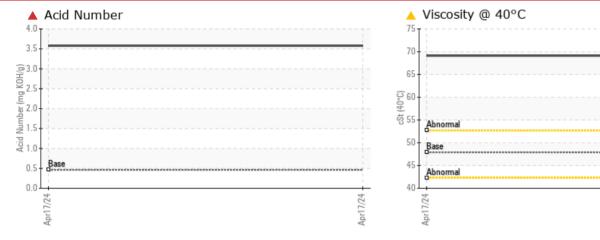

RECOMMENDATION

We advise that you check for a possible overheat condition. Recommend drain oil if not already done and flush with cleaner before refilling with oil. We recommend an early resample to monitor this condition.

| PROBLEMATIC TEST RESULTS |
|--------------------------|
|--------------------------|

| Sample Status | | | | SEVERE | |
|------------------|----------|------------|-------|---------------|------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.463 | A 3.58 | |
| Visc @ 40°C | cSt | ASTM D445 | 47.9 | 6 9.13 | |

Customer Id: UCCISSAC Sample No.: UCH06160483 Lab Number: 06160483 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 ihester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

| RECOMMENDED ACTIONS | | | | | | | | |
|--------------------------|--------|------|---------|---|--|--|--|--|
| Action | Status | Date | Done By | Description | | | | |
| Change Fluid | | | ? | Recommend drain oil if not already done and flush with cleaner before refilling with oil. | | | | |
| Flush System | | | ? | Recommend drain oil if not already done and flush with cleaner before refilling with oil. | | | | |
| Resample | | | ? | We recommend an early resample to monitor this condition. | | | | |
| Check For Overheating | | | ? | We advise that you check for a possible overheat condition. | | | | |

HISTORICAL DIAGNOSIS



Area FOOD GRADE CS46 [CAC3004430] ATLAS COPCO API631105R - HENRYS CO

Component Compressor

DIAGNOSIS

Recommendation

We advise that you check for a possible overheat condition. Recommend drain oil if not already done and flush with cleaner before refilling with oil. We recommend an early resample to monitor this condition.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is above the recommended limit. The oil viscosity is higher than normal. TAN level indicates possible presence of varnish.

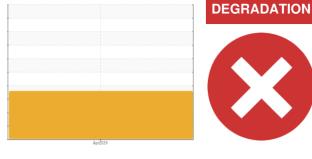


Sample Rating Trend



| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|---------------|-------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | UCH06160483 | | |
| Sample Date | | Client Info | | 17 Apr 2024 | | |
| Machine Age | hrs | Client Info | | 15624 | | |
| Oil Age | hrs | Client Info | | 3984 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | SEVERE | | |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 1 | | |
| Chromium | ppm | ASTM D5185m | >5 | <1 | | |
| Nickel | ppm | ASTM D5185m | | <1 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >15 | 2 | | |
| Lead | ppm | ASTM D5185m | >65 | <1 | | |
| Copper | ppm | ASTM D5185m | >65 | 1 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 1.5 | 0 | | |
| Barium | ppm | ASTM D5185m | 0 | 0 | | |
| Molybdenum | ppm | ASTM D5185m | 0 | <1 | | |
| Manganese | ppm | ASTM D5185m | 0.3 | <1 | | |
| Magnesium | ppm | ASTM D5185m | 0 | <1 | | |
| Calcium | ppm | ASTM D5185m | 0 | 0 | | |
| Phosphorus | ppm | ASTM D5185m | 406 | 15 | | |
| Zinc | ppm | ASTM D5185m | 0 | 0 | | |
| Sulfur | ppm | ASTM D5185m | 1283 | 84 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >35 | 2 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.463 | 3.58 | | |



OIL ANALYSIS REPORT

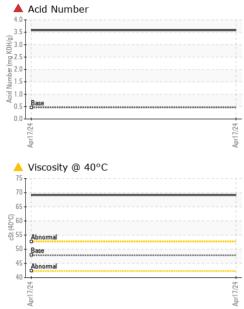

| | VISUAL | | method | limit/base | current | history1 | history2 |
|---|--|-------------------------------------|--------------------|------------|--|----------|---|
| | White Metal | scalar | *Visual | NONE | NONE | | |
| | Yellow Metal | scalar | *Visual | NONE | NONE | | |
| | Precipitate | scalar | *Visual | NONE | NONE | | |
| | Silt | scalar | *Visual | NONE | NONE | | |
| | Debris | scalar | *Visual | NONE | NONE | | |
| | Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Apr17/24 | Appearance | scalar | *Visual | NORML | NORML | | |
| Apr1 | Odor | scalar | *Visual | NORML | NORML | | |
| | Emulsified Water | scalar | *Visual | >0.1 | NEG | | |
| | Free Water | scalar | *Visual | | NEG | | |
| | FLUID PROPERT | | method | limit/base | current | history1 | history2 |
| | | | | | | - | |
| | Visc @ 40°C | cSt | ASTM D445 | 47.9 | 69.13 | | |
| | SAMPLE IMAGE | S | method | limit/base | current | history1 | history2 |
| An17/24 | Color | | | | | no image | no image |
| | Bottom | | | | | no image | no image |
| | Non-ferrous Metal | | | Apri17/24 | | | |
| | Viscosity @ 40°C | | | (g) | Acid Number | | |
| | 70 | | | Apr17/24 | .0 .0 .0 .0 .0 .0 .0 .0 .0 .0 .0 .0 .0 | | 2 |
| Laboratory Sample No. Lab Number Unique Number | : WearCheck USA - 50 : UCH06160483 : <mark>06160483</mark> | 1 Madiso Recei Teste Diagn | ved : 25 d : 29 | | | | AIR SYSTEM 214 27TH S RAMENTO, C US 9581 |

Contact/Location: BARRY FRKOVICH - UCCISSAC