




OIL ANALYSIS REPORT

Sample Rating Trend

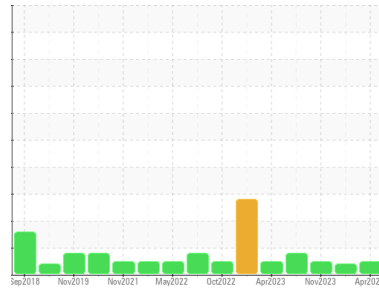

NORMAL



Area

UTILITIES

Machine Id

SS1-GEN (S/N 3000394153)

Component

Auxiliary Power Unit Natural Gas Engine

Fluid

DIESEL ENGINE OIL SAE 5W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0840376	WC0840383	WC0840387
Sample Date	Client Info	22 Apr 2024	25 Jan 2024	13 Nov 2023
Machine Age	hrs	320	0	312
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	5	<1	1
Chromium	ppm	ASTM D5185m >4	<1	<1	0
Nickel	ppm	ASTM D5185m >2	1	0	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	2	<1	1
Lead	ppm	ASTM D5185m >30	2	2	<1
Copper	ppm	ASTM D5185m >35	70	43	47
Tin	ppm	ASTM D5185m >4	<1	<1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	17	13	12
Barium	ppm	ASTM D5185m 10	0	0	6
Molybdenum	ppm	ASTM D5185m 100	58	57	60
Manganese	ppm	ASTM D5185m	<1	<1	0
Magnesium	ppm	ASTM D5185m 450	913	912	882
Calcium	ppm	ASTM D5185m 3000	1086	1065	1101
Phosphorus	ppm	ASTM D5185m 1150	1091	1004	1092
Zinc	ppm	ASTM D5185m 1350	1208	1220	1172
Sulfur	ppm	ASTM D5185m 4250	3788	3052	3234

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	4	3	2
Sodium	ppm	ASTM D5185m	3	<1	0
Potassium	ppm	ASTM D5185m >20	<1	2	1

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	0.1	0	0
Nitration	Abs/cm	*ASTM D7624 >20	5.2	5.0	4.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.6	17.7	17.9

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.4	13.5	13.5
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	9.67	10.19	10.07







OIL ANALYSIS REPORT

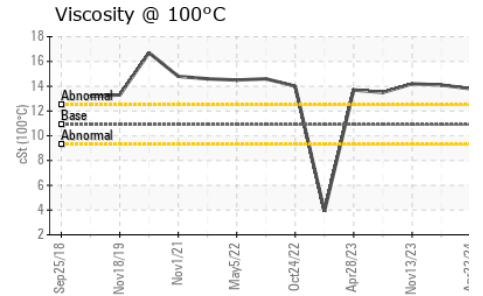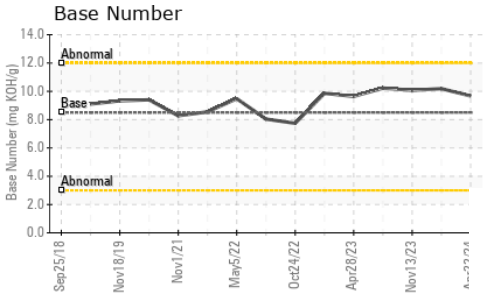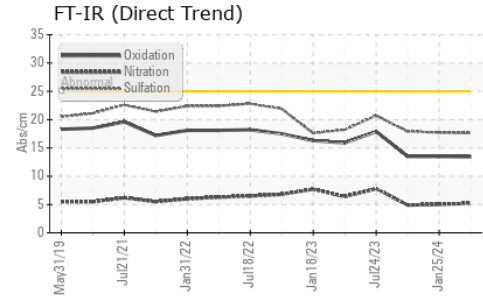

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	13.8	14.1	14.2

GRAPHS

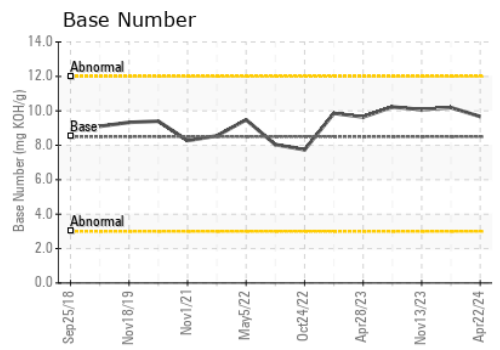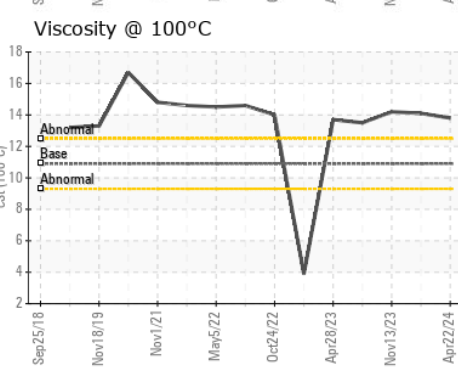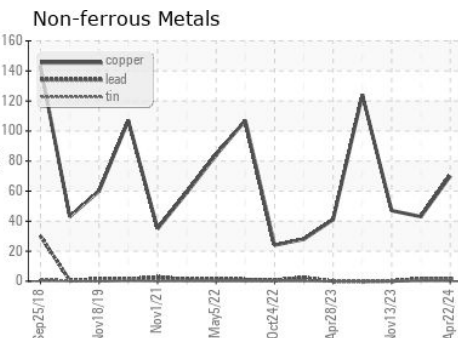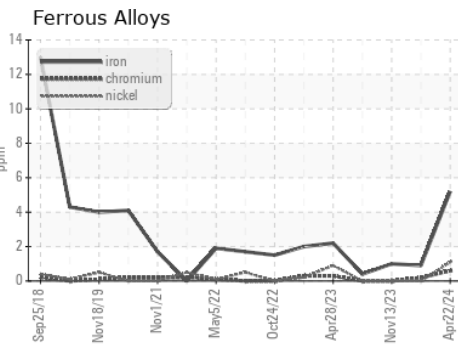

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0840376 **Received** : 25 Apr 2024
Lab Number : 06160577 **Tested** : 26 Apr 2024
Unique Number : 10996000 **Diagnosed** : 26 Apr 2024 - Sean Felton
Test Package : IND 2

TORAY CARBON FIBERS AMERICA INC
 2202 MOORE DUNCAN HWY
 MOORE, SC
 US 29369
 Contact: Kirk Stilling
 Kirk.stilling@toraycma.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)