



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
BC-04 BC-04

Component
Gearbox

Fluid
SCHAEFFER SCHAEFFER 239S 50W (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0920470	---	---
Sample Date	Client Info			10 Apr 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	78	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>200	0	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		52	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m	133	216	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		8	---	---
Calcium	ppm	ASTM D5185m	3000	3431	---	---
Phosphorus	ppm	ASTM D5185m	946	953	---	---
Zinc	ppm	ASTM D5185m	867	1096	---	---
Sulfur	ppm	ASTM D5185m		6682	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	19	---	---
Sodium	ppm	ASTM D5185m		10	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---



OIL ANALYSIS REPORT

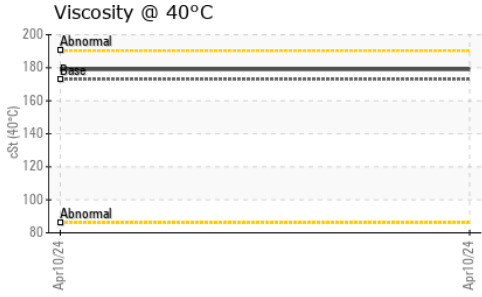




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 173	179	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		<i>no image</i>	<i>no image</i>	<i>no image</i>
Bottom		<i>no image</i>	<i>no image</i>	<i>no image</i>

GRAPHS

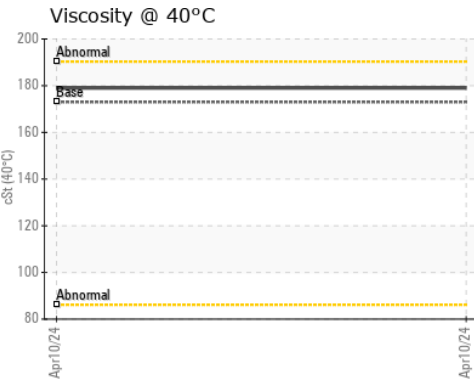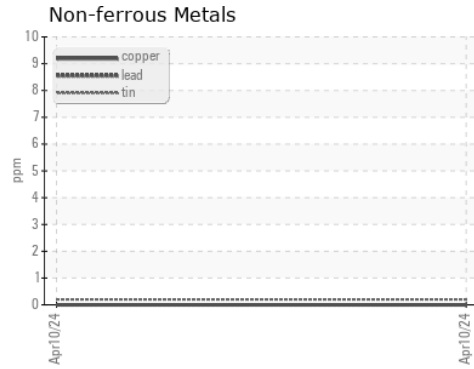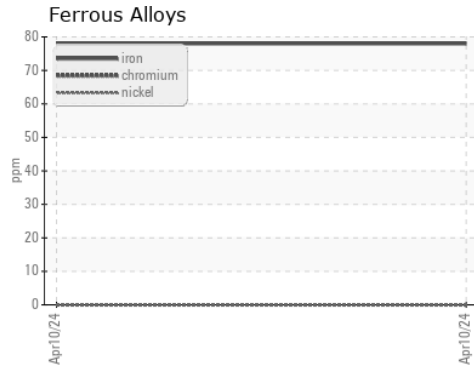

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0920470 **Received** : 25 Apr 2024
Lab Number : **06160804** **Tested** : 26 Apr 2024
Unique Number : 10996227 **Diagnosed** : 26 Apr 2024 - Wes Davis
Test Package : CONST

COVIA - JUNCTION CITY - 095
 1333 SANDPIT ROAD
 MAUK, GA
 US 31058
 Contact: Phil Ivanisin
 phil.ivanisin@coviacorp.com
 T: (478)244-7020
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)