

## **OIL ANALYSIS REPORT**

# Area **RO NFDM** [1958704] RO02PP31BB01

Bearing Fluid MOBIL SHC 626 (--- QTS)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is suitable for further service.

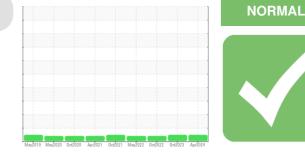


Sample Rating Trend

SAMPLE INFORM	<b>/IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0927361	WC0864101	WC0747529
Sample Date		Client Info		18 Apr 2024	18 Oct 2023	17 Oct 2022
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	0	1
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m	20	<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	<1
Lead		ASTM D5185m	>20	۰ <1	<1	<1
	ppm	ASTM D5185m	>20	2	2	2
Copper Tin	ppm	ASTM D5185m	>20	0	<1	<1
	ppm		>20	0		0
Vanadium	ppm	ASTM D5185m		-	0	
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	9	0
Calcium	ppm	ASTM D5185m		15	13	16
Phosphorus	ppm	ASTM D5185m		448	436	439
Zinc	ppm	ASTM D5185m		61	50	59
Sulfur	ppm	ASTM D5185m		1505	1204	1435
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
1.50.24) Pov: 1				Cubmitt	OD BV: MICHAE	


Submitted By: MICHAEL VILLASENOR




# **OIL ANALYSIS REPORT**

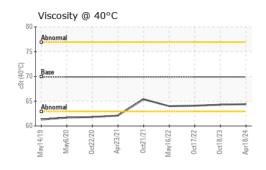

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	69.9	64.4	64.3	64.1
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				a.		
Bottom						

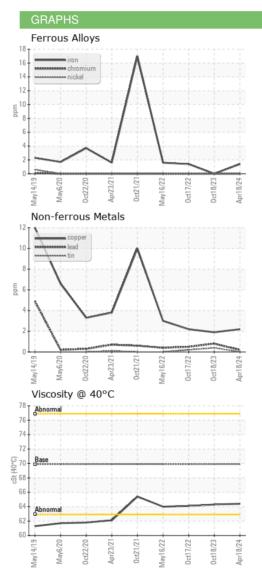

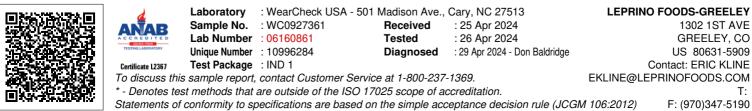

Report Id: LEPGRE [WUSCAR] 06160861 (Generated: 04/29/2024 11:50:24) Rev: 1

F: (970)347-5190

Submitted By: MICHAEL VILLASENOR

Page 2 of 2