


OIL ANALYSIS REPORT

Sample Rating Trend

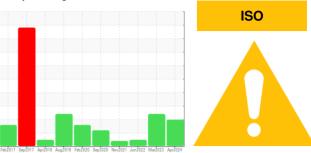

Machine Id

KAESER SK 20T 4421632 (S/N 1111)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Feb.2017 Sep.2017 Apr.2018 Apr.2018 Feb.2020 Sep.2020 Nov.2021 Jun.2022 Mer.2023 Apr.2024						
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012662	KCPA000350	KCP49612
Sample Date		Client Info		16 Apr 2024	30 Mar 2023	28 Jun 2022
Machine Age	hrs	Client Info		12496	11385	11090
Oil Age	hrs	Client Info		1111	0	3210
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	1	1	7
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	21	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	100	70	84	31
Calcium	ppm	ASTM D5185m	0	<1	2	0
Phosphorus	ppm	ASTM D5185m	0	7	9	10
Zinc	ppm	ASTM D5185m	0	13	8	8
Sulfur	ppm	ASTM D5185m	23500	22546	20241	20315
CONTAMINANTS					20271	20010
CONTAMINANTS		method	limit/base		history1	history2
Silicon	ppm	method ASTM D5185m	limit/base >25			
				current	history1	history2
Silicon	ppm	ASTM D5185m	>25	current <1	history1 <1	history2 <1
Silicon Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m	>25	current <1 16	history1 <1 12	history2 <1 3
Silicon Sodium Potassium Water	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	<pre>current <1 16 4</pre>	history1 <1 12	history2 <1 3 2
Silicon Sodium Potassium Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	current <1 16 4 0.027 274	history1 <1 12 1 0.013	history2 <1 3 2 0.018
Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	current <1 16 4 0.027 274	history1 <1 12 1 0.013 133.5	history2 <1 3 2 0.018 183.8
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>25 >20 >0.05 >500	current <1 16 4 0.027 274 current	history1 <1 12 1 0.013 133.5 history1	history2 <1 3 2 0.018 183.8 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>25 >20 >0.05 >500 limit/base	current <1 16 4 0.027 274 current 72112	history1 <1 12 1 0.013 133.5 history1 35726 ▲ 14879 ▲ 2338	history2 <1 3 2 0.018 183.8 history2 2230
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base	current <1 16 4 0.027 274 current 72112 ▲ 27578	history1 <1 12 1 0.013 133.5 history1 35726 ▲ 14879	history2 <1 3 2 0.018 183.8 history2 2230 796
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	current <1 16 4 0.027 274 current 72112 △ 27578 △ 1982	history1 <1 12 1 0.013 133.5 history1 35726 ▲ 14879 ▲ 2338	history2 <1 3 2 0.018 183.8 history2 2230 796 80
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	current <1 16 4 0.027 274 current 72112 ▲ 27578 ▲ 1982 ▲ 309	history1 <1 12 1 0.013 133.5 history1 35726 ▲ 14879 ▲ 2338 ▲ 828	history2 <1 3 2 0.018 183.8 history2 2230 796 80 16
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	current <1 16 4 0.027 274 current 72112 △ 27578 △ 1982 △ 309 △ 10	history1 <1 12 1 0.013 133.5 history1 35726 ▲ 14879 ▲ 2338 ▲ 828 ▲ 51	history2 <1 3 2 0.018 183.8 history2 2230 796 80 16 1



OIL ANALYSIS REPORT

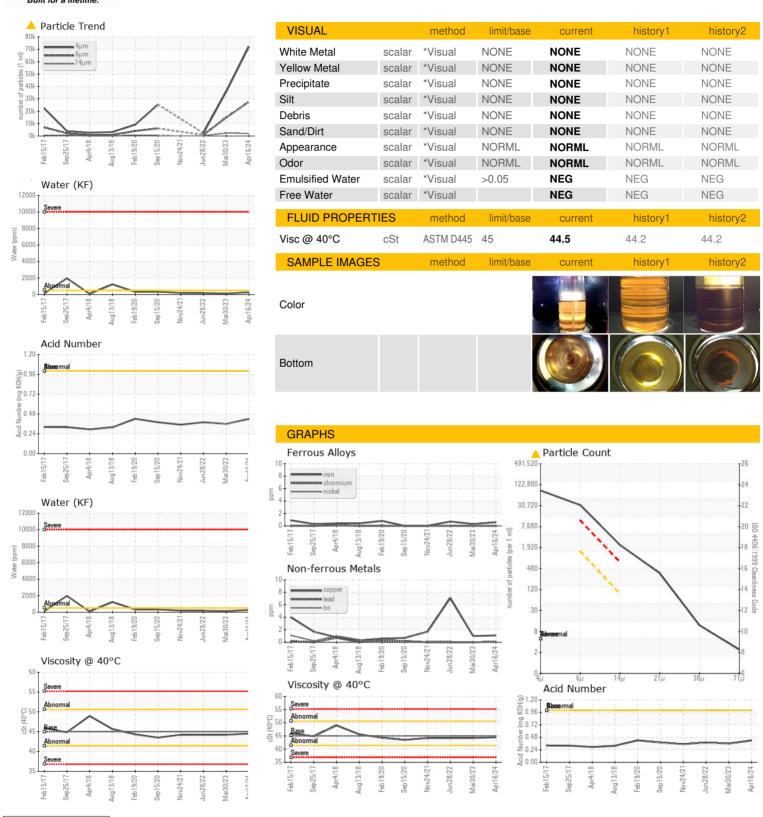





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number

: KCPA012662 : 06160944

Unique Number: 10996367

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received

Diagnosed

Tested

: 25 Apr 2024

: 26 Apr 2024

: 29 Apr 2024 - Don Baldridge

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GROUP 1 AUTOMOTIVE dba BARON COLLISION CENTER

6231 MASTIN ST MERRIAM, KS US 66203

Contact: J. ROCHA irocha@baronauto.com

T:

F: