


OIL ANALYSIS REPORT

Sample Rating Trend

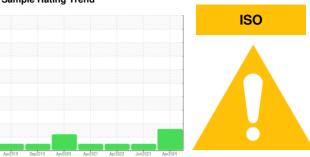

Machine Id

KAESER DSD 250 6343276 (S/N 1072)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Apizoto	30p2013 Api2020	Aprilozi Aprilozz Sunzozs	April 12	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012711	KCPA005010	KCP45007
Sample Date		Client Info		18 Apr 2024	26 Jun 2023	22 Apr 2022
Machine Age	hrs	Client Info		26043	21826	17039
Oil Age	hrs	Client Info		4267	0	5633
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	<1	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	7	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	3	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	33	0	0
Calcium	ppm	ASTM D5185m	2	<1	0	2
Phosphorus	ppm	ASTM D5185m		<1	3	0
Zinc	ppm	ASTM D5185m		11	0	0
Sulfur	ppm	ASTM D5185m		22376	15191	14249
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	0	<1
Sodium	ppm	ASTM D5185m		8	0	<1
Potassium	ppm	ASTM D5185m	>20	10	2	0
Water	%	ASTM D6304	>0.05	0.013	0.006	0.006
ppm Water	ppm	ASTM D6304	>500	138	67.1	67.8
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		13502	1820	1451
Particles >6µm		ASTM D7647	>1300	4 3570	329	387
Particles >14µm		ASTM D7647	>80	<u> </u>	4	29
Particles >21µm		ASTM D7647	>20	<u></u> 31	1	13
Particles >38µm		ASTM D7647	>4	1	0	3
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 21/19/15	18/16/9	18/16/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

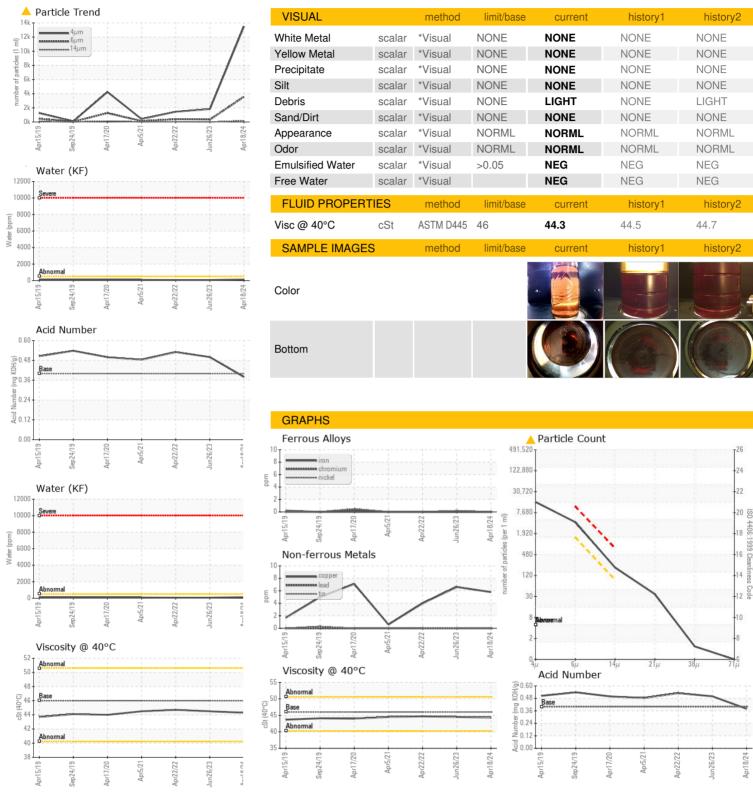





Certificate 12367

Laboratory Sample No.

Lab Number : 06160959 Unique Number : 10996382 Test Package : IND 2 (Additional Tests: KF, PrtCount)

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA012711 Received : 25 Apr 2024 **Tested**

: 26 Apr 2024 Diagnosed

: 29 Apr 2024 - Don Baldridge

CROWN CORK & SEAL 5005 N SPRINGBORO PIKE DAYTON, OH US 45439

RENE.SANTIAGO@CROWNCORK.COM

Contact: RENE SANTIAGO

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: