




OIL ANALYSIS REPORT

Sample Rating Trend

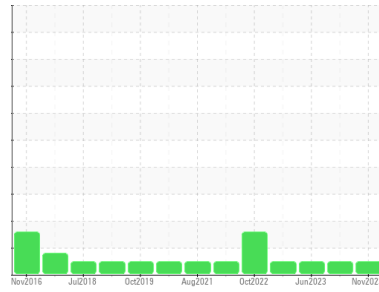

NORMAL



Machine Id
TEREX FD6000 1541 (S/N 570011913)
 Component
Rear Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (9 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RW0004367	RW0002962	RW0004466
Sample Date	Client Info		17 Nov 2023	02 Nov 2023	08 Jun 2023
Machine Age	hrs	Client Info	5658	0	21754
Oil Age	hrs	Client Info	568	468	416
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	24	30	28
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	<1
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	<1	<1
Aluminum	ppm	ASTM D5185m >25	<1	1	1
Lead	ppm	ASTM D5185m >40	<1	<1	1
Copper	ppm	ASTM D5185m >330	2	4	6
Tin	ppm	ASTM D5185m >15	<1	<1	2
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	42	40	53
Barium	ppm	ASTM D5185m 0	0	4	0
Molybdenum	ppm	ASTM D5185m 0	42	44	43
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	558	490	536
Calcium	ppm	ASTM D5185m	1924	1611	1724
Phosphorus	ppm	ASTM D5185m	856	755	785
Zinc	ppm	ASTM D5185m	1028	887	952
Sulfur	ppm	ASTM D5185m	3230	2585	2788

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	8	10
Sodium	ppm	ASTM D5185m	3	<1	3
Potassium	ppm	ASTM D5185m >20	<1	1	1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.6	0.5
Nitration	Abs/cm	*ASTM D7624 >20	8.2	8.4	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.8	22.0	23.1


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.6	21.1	22.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	9.16	10.67	10.12




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

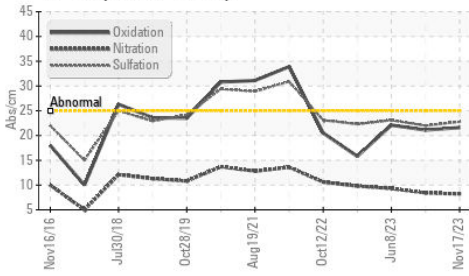

Base Number

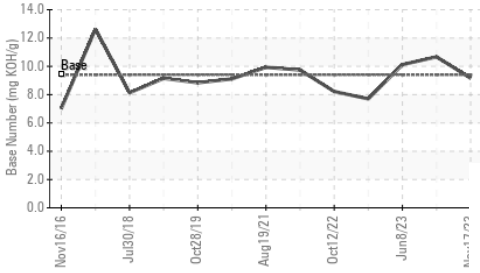


Viscosity @ 100°C

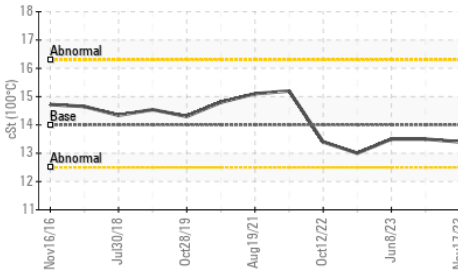

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.4	13.5	13.5

GRAPHS

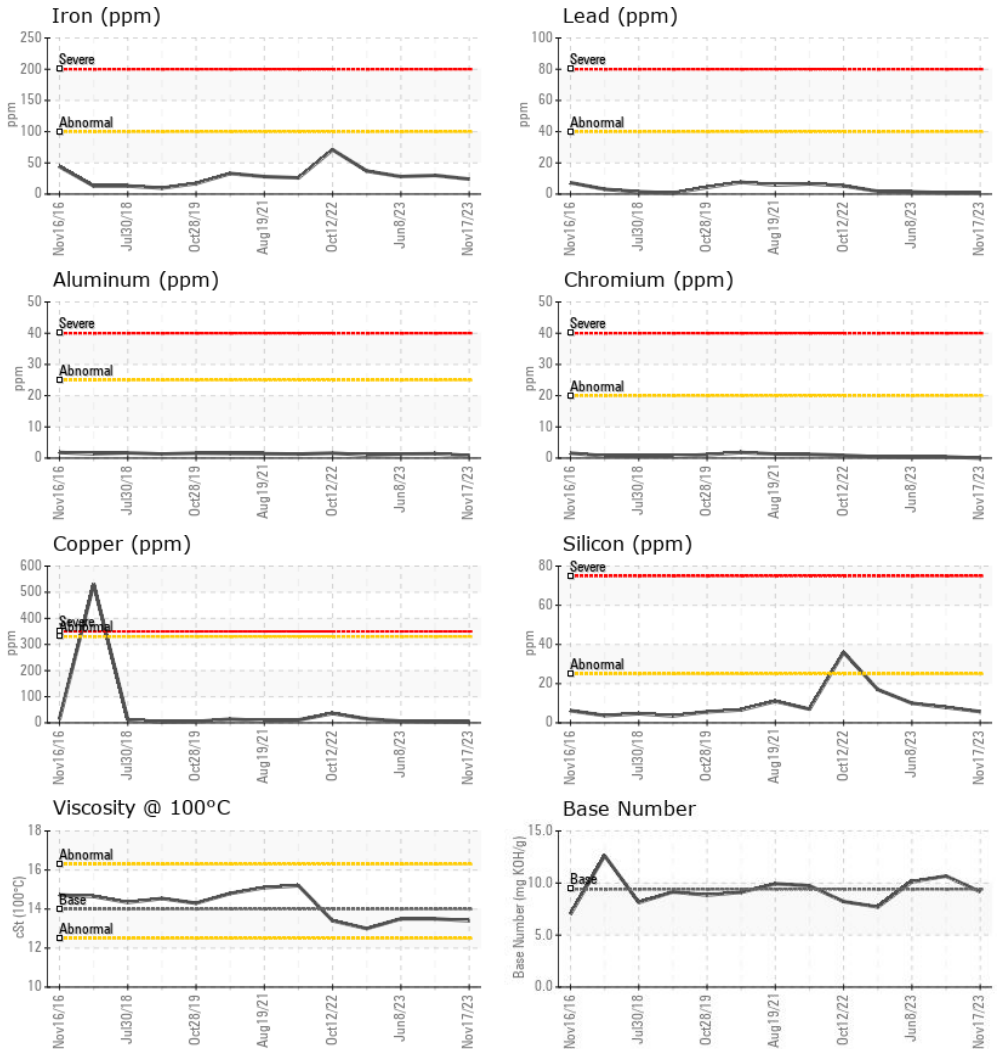

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0004367
Lab Number : 06160993
Unique Number : 10996416
Test Package : MOB 2

Received : 25 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 26 Apr 2024 - Wes Davis

HOMER CONCRETE
 205 S CEDAR ST
 IMLAY CITY, MI
 US 48444

Contact: DENNIS ONDRAJKA
 homerconcrete@aol.com
 T: (810)724-3905
 F: (810)724-0733

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)