




# OIL ANALYSIS REPORT

Sample Rating Trend

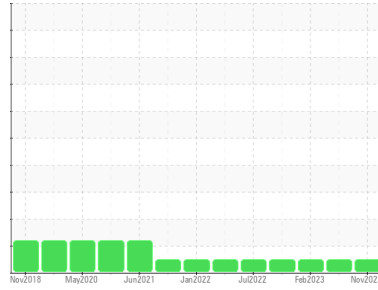

**NORMAL**



Machine Id  
**KENWORTH W900 279335**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (12 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RW0004368</b>	RW0004382	RW0004035
Sample Date	Client Info		<b>01 Nov 2023</b>	30 May 2023	25 Feb 2023
Machine Age	mls	Client Info	<b>284019</b>	121677	110214
Oil Age	mls	Client Info	<b>4950</b>	11463	9814
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>21</b>	26	17
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >150	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >90	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>30</b>	43	56
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m 0	<b>47</b>	40	34
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>595</b>	578	629
Calcium	ppm	ASTM D5185m	<b>2002</b>	1778	1384
Phosphorus	ppm	ASTM D5185m	<b>881</b>	764	741
Zinc	ppm	ASTM D5185m	<b>1056</b>	966	887
Sulfur	ppm	ASTM D5185m	<b>3226</b>	2973	3179

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>5</b>	6	6
Sodium	ppm	ASTM D5185m	<b>3</b>	3	0
Potassium	ppm	ASTM D5185m >20	<b>4</b>	4	9

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.8</b>	0.8	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.7</b>	11.5	9.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.7</b>	25.0	22.0


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.3</b>	23.1	15.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>8.42</b>	9.94	8.37




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

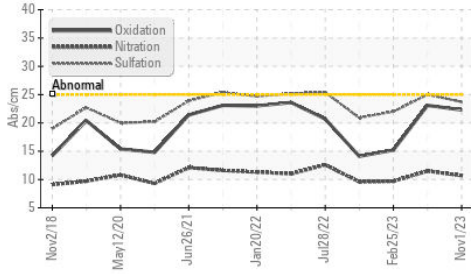

Base Number

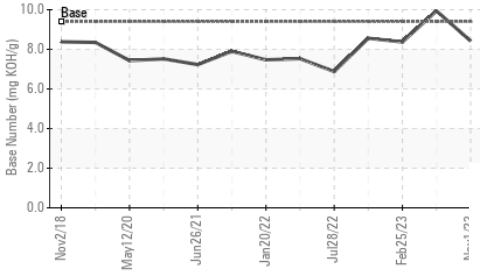

Viscosity @ 100°C

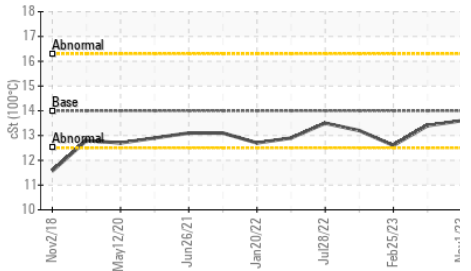


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.6	13.4	12.6

## GRAPHS


Iron (ppm)

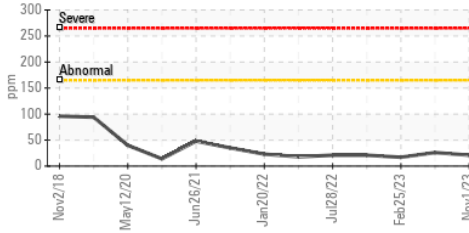


Lead (ppm)

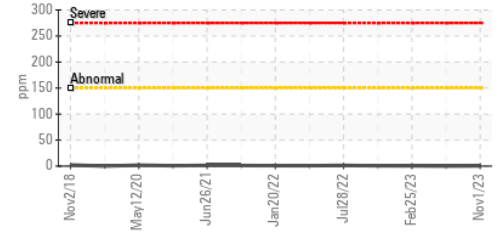


Aluminum (ppm)

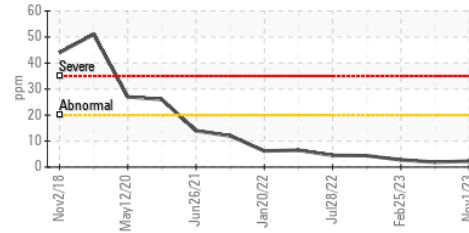


Chromium (ppm)

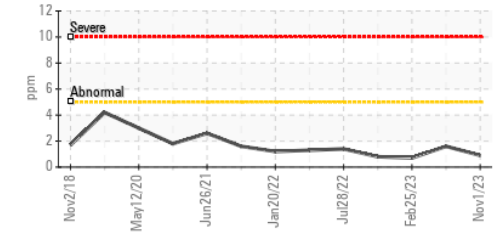


Copper (ppm)

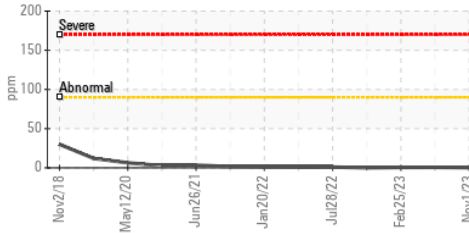


Silicon (ppm)

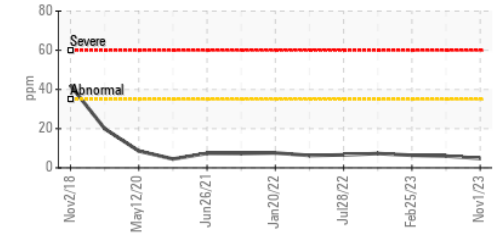

Viscosity @ 100°C

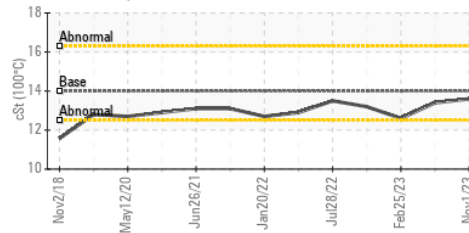

Base Number

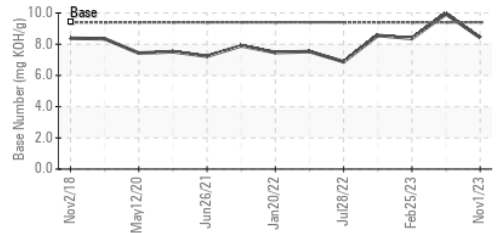

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : RW0004368  
 Lab Number : 06160994  
 Unique Number : 10996417  
 Test Package : MOB 2

Received : 25 Apr 2024  
 Tested : 26 Apr 2024  
 Diagnosed : 26 Apr 2024 - Wes Davis

**HOMER CONCRETE**  
 205 S CEDAR ST  
 IMLAY CITY, MI  
 US 48444

Contact: DENNIS ONDRAJKA  
 homerconcrete@aol.com  
 T: (810)724-3905  
 F: (810)724-0733

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)