




# OIL ANALYSIS REPORT

Sample Rating Trend

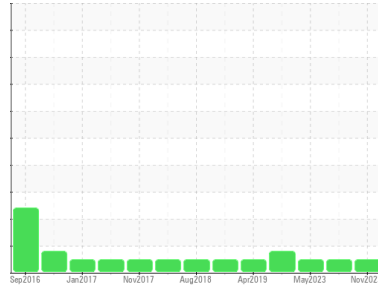

**NORMAL**



Machine Id  
**TEREX MIXER FD6000 1502 (S/N SDG8AC6T950010566)**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RW0004369</b>	RW0004374	RW0004375
Sample Date	Client Info		<b>21 Nov 2023</b>	31 Jul 2023	08 May 2023
Machine Age	mls	Client Info	<b>254250</b>	247650	263644
Oil Age	mls	Client Info	<b>6597</b>	7000	5589
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>21</b>	33	43
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	2	<1
Lead	ppm	ASTM D5185m >40	<b>1</b>	2	3
Copper	ppm	ASTM D5185m >330	<b>4</b>	7	10
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>33</b>	34	50
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>45</b>	43	31
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>576</b>	543	721
Calcium	ppm	ASTM D5185m	<b>1969</b>	1773	1445
Phosphorus	ppm	ASTM D5185m	<b>872</b>	782	737
Zinc	ppm	ASTM D5185m	<b>1036</b>	981	901
Sulfur	ppm	ASTM D5185m	<b>3228</b>	2779	3342

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	7	6
Sodium	ppm	ASTM D5185m	<b>7</b>	5	5
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	2

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.4</b>	10.7	11.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.4</b>	24.2	23.6


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.2</b>	24.8	20.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>8.70</b>	7.13	10.18




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

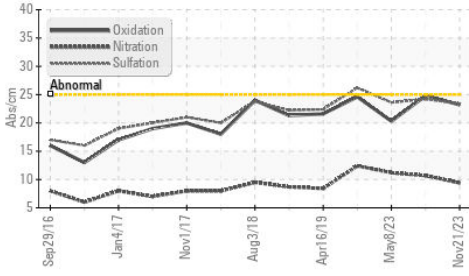

Base Number

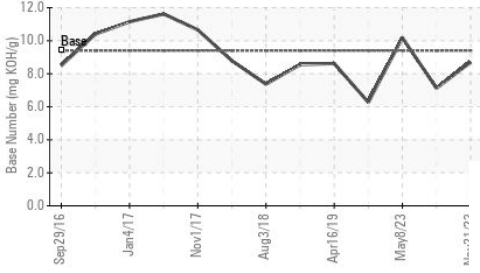









Viscosity @ 100°C

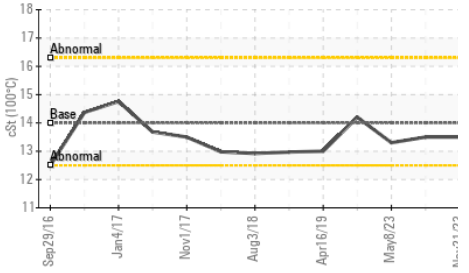

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14	13.5	13.3

## GRAPHS

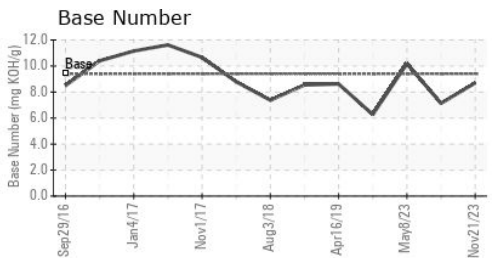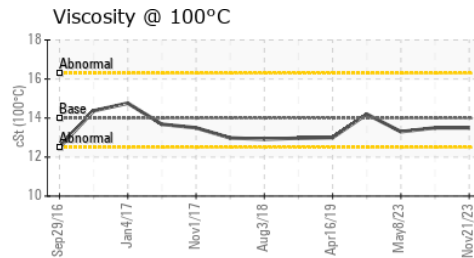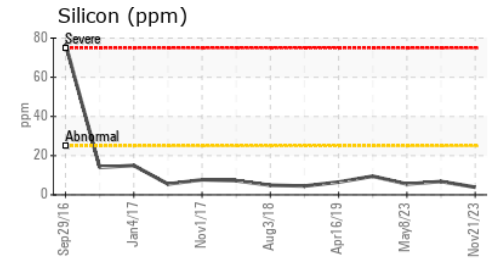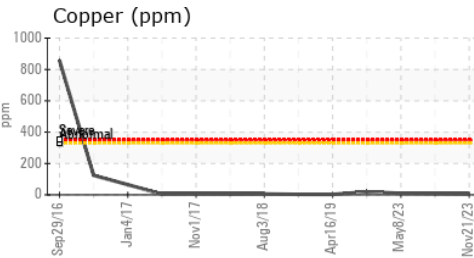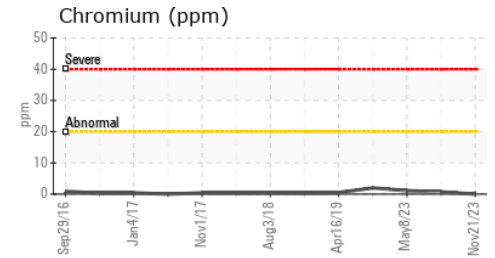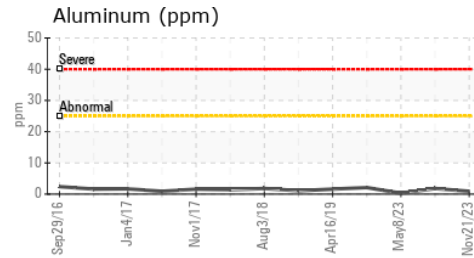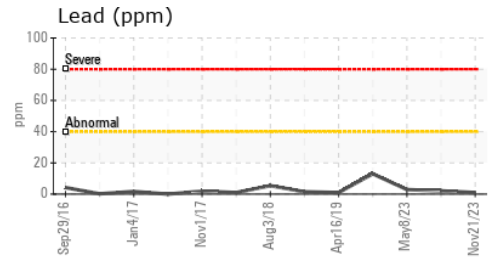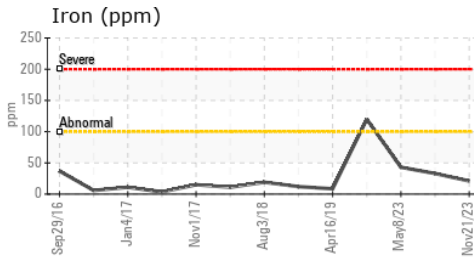

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0004369  
**Lab Number** : 06160995  
**Unique Number** : 10996418  
**Test Package** : MOB 2

**Received** : 25 Apr 2024  
**Tested** : 26 Apr 2024  
**Diagnosed** : 26 Apr 2024 - Wes Davis

**HOMER CONCRETE**  
 205 S CEDAR ST  
 IMLAY CITY, MI  
 US 48444

Contact: DENNIS ONDRAJKA  
 homerconcrete@aol.com  
 T: (810)724-3905  
 F: (810)724-0733

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)