



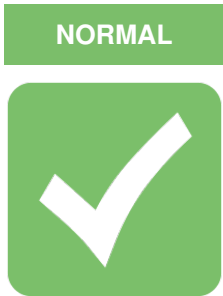

# OIL ANALYSIS REPORT

## Sample Rating Trend

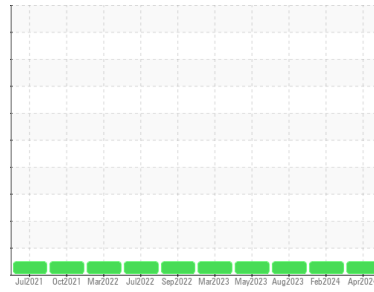

Machine Id  
**KENWORTH 001**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### DIAGNOSIS

- Recommendation**  
Resample at the next service interval to monitor.
- Wear**  
All component wear rates are normal.
- Contamination**  
There is no indication of any contamination in the oil.
- Fluid Condition**  
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>RW0005471</b>	RW0005006	RW0004504
Sample Date	Client Info			<b>06 Apr 2024</b>	06 Feb 2024	05 Aug 2023
Machine Age	hrs	Client Info		<b>3322</b>	3024	2647
Oil Age	hrs	Client Info		<b>298</b>	377	350
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	<b>8</b>	6	10
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	7	6
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>11</b>	1	6
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>67</b>	61	62
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>1101</b>	896	985
Calcium	ppm	ASTM D5185m	3000	<b>1432</b>	1063	1182
Phosphorus	ppm	ASTM D5185m	1150	<b>1272</b>	961	1036
Zinc	ppm	ASTM D5185m	1350	<b>1544</b>	1241	1316
Sulfur	ppm	ASTM D5185m	4250	<b>4720</b>	2953	3738

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	>158	<b>2</b>	0	3
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	13	22


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	<b>0.4</b>	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	7.3	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	18.8	18.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	13.8	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>10.68</b>	10.56	9.65




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

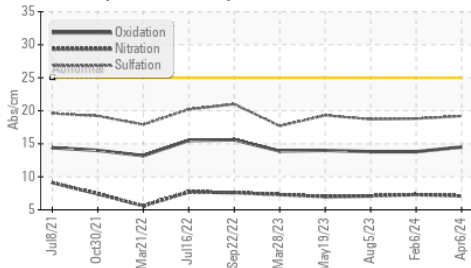

Base Number

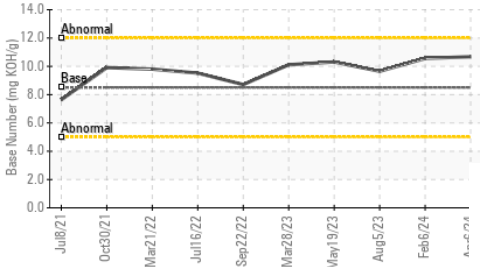









Viscosity @ 100°C

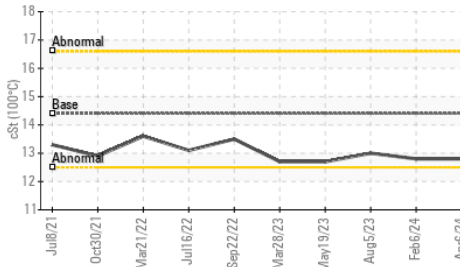

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	12.8

## GRAPHS

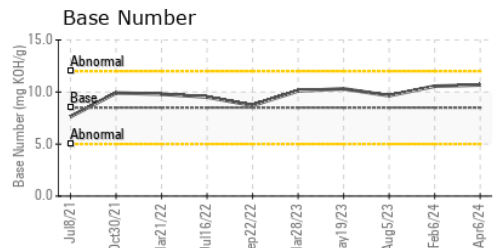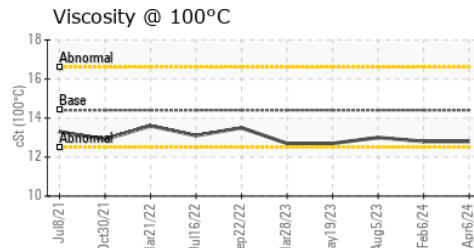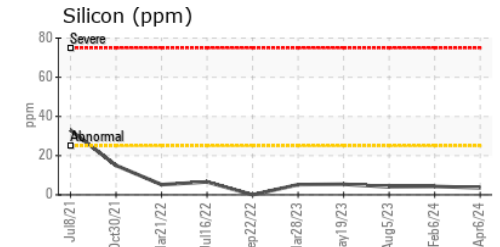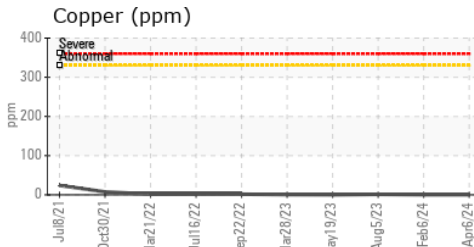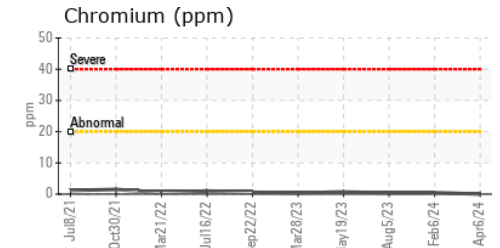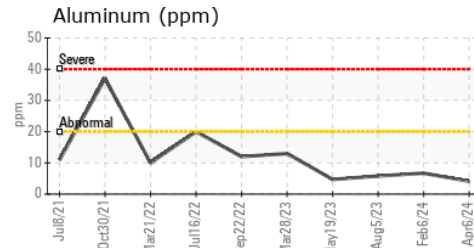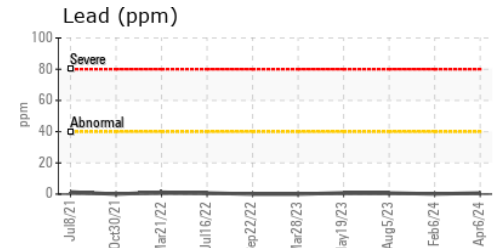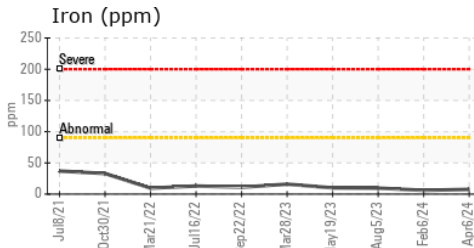

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : RW0005471  
 Lab Number : 06161016  
 Unique Number : 10996439  
 Test Package : MOB 2

Received : 25 Apr 2024  
 Tested : 26 Apr 2024  
 Diagnosed : 26 Apr 2024 - Wes Davis

HALLACK CONTRACTING, INC.  
 4223 W POLK  
 HART, MI  
 US 49420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: DAN HALLACK KARL BUTCHER  
 shop@hallackcontracting.com

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (231)873-5081

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (231)873-2889