




OIL ANALYSIS REPORT

Sample Rating Trend

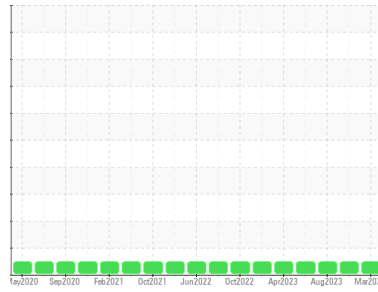

NORMAL



Machine Id
KENWORTH 95
 Component
Diesel Engine
 Fluid
DISEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RW0005161	RW0004727	RW0004501
Sample Date	Client Info		29 Mar 2024	09 Feb 2024	12 Aug 2023
Machine Age	hrs	Client Info	6014	5743	5162
Oil Age	hrs	Client Info	271	581	312
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	11	15	16
Chromium	ppm	ASTM D5185m >20	<1	1	1
Nickel	ppm	ASTM D5185m >4	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	5	2
Lead	ppm	ASTM D5185m >40	2	4	3
Copper	ppm	ASTM D5185m >330	<1	<1	0
Tin	ppm	ASTM D5185m >15	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	10	<1	7
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	69	64	70
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	1132	928	1043
Calcium	ppm	ASTM D5185m 3000	1494	1125	1322
Phosphorus	ppm	ASTM D5185m 1150	1318	984	1158
Zinc	ppm	ASTM D5185m 1350	1590	1292	1478
Sulfur	ppm	ASTM D5185m 4250	4709	2885	4070

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	5	4
Sodium	ppm	ASTM D5185m >158	<1	0	2
Potassium	ppm	ASTM D5185m >20	4	4	7

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.4	0.8	0.6
Nitration	Abs/cm	*ASTM D7624 >20	8.5	10.8	8.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.4	22.1	20.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.8	16.9	14.8
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	10.28	9.32	9.55




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

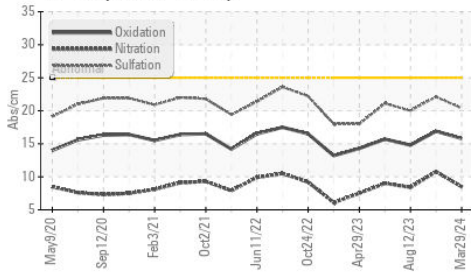

Base Number

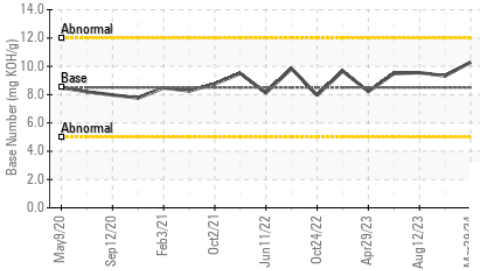

Viscosity @ 100°C

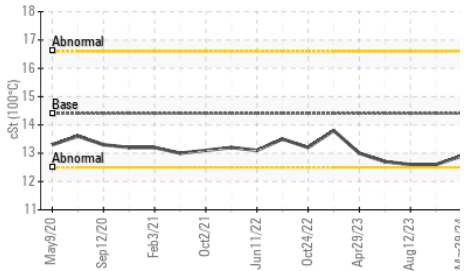


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.9	12.6

GRAPHS


Iron (ppm)

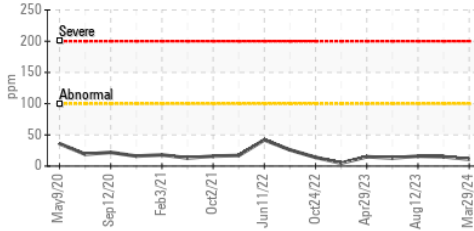


Lead (ppm)

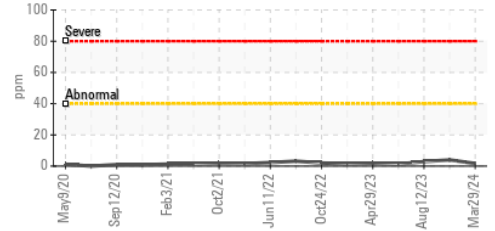


Aluminum (ppm)

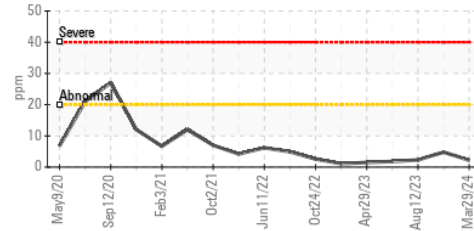


Chromium (ppm)

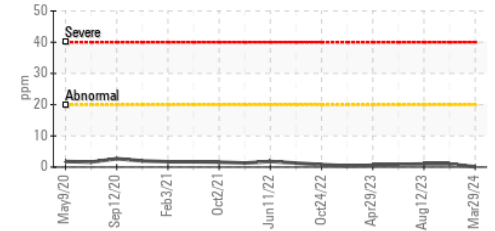


Copper (ppm)

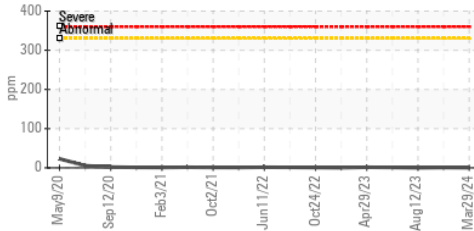


Silicon (ppm)

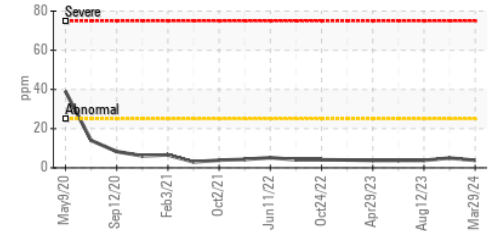

Viscosity @ 100°C

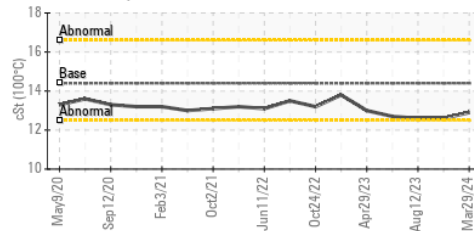

Base Number

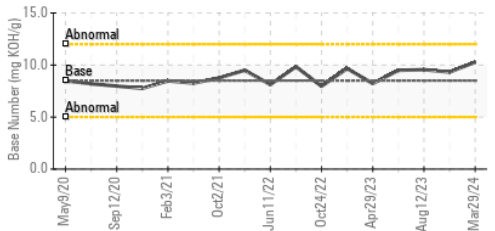

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0005161
Lab Number : 06161019
Unique Number : 10996442
Test Package : MOB 2

Received : 25 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 26 Apr 2024 - Wes Davis

HALLACK CONTRACTING, INC.
 4223 W POLK
 HART, MI
 US 49420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: DAN HALLACK KARL BUTCHER
 shop@hallackcontracting.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (231)873-5081

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (231)873-2889