




# OIL ANALYSIS REPORT

## Sample Rating Trend

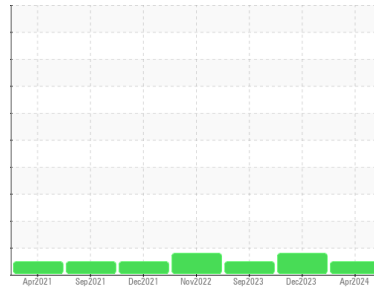

**NORMAL**



Machine Id

**FSP141258**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0903122</b>   | WC0875696   | WC0852280   |
| Sample Date   | Client Info |             | <b>17 Apr 2024</b> | 12 Dec 2023 | 12 Sep 2023 |
| Machine Age   | mls         | Client Info | <b>186631</b>      | 164803      | 150556      |
| Oil Age       | mls         | Client Info | <b>60000</b>       | 0           | 0           |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | MARGINAL    | NORMAL      |

### CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | ▲ 2.9    | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

### WEAR METALS

|          | method | limit/base  | current | history1     | history2 |    |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron     | ppm    | ASTM D5185m | >100    | <b>41</b>    | 27       | 38 |
| Chromium | ppm    | ASTM D5185m | >20     | <b>2</b>     | <1       | 1  |
| Nickel   | ppm    | ASTM D5185m | >4      | <b>1</b>     | 0        | <1 |
| Titanium | ppm    | ASTM D5185m |         | <b>&lt;1</b> | 0        | 0  |
| Silver   | ppm    | ASTM D5185m | >3      | <b>0</b>     | 0        | 0  |
| Aluminum | ppm    | ASTM D5185m | >20     | <b>7</b>     | 5        | 7  |
| Lead     | ppm    | ASTM D5185m | >40     | <b>&lt;1</b> | 0        | 0  |
| Copper   | ppm    | ASTM D5185m | >330    | <b>2</b>     | 1        | <1 |
| Tin      | ppm    | ASTM D5185m | >15     | <b>&lt;1</b> | 0        | <1 |
| Vanadium | ppm    | ASTM D5185m |         | <b>&lt;1</b> | <1       | 0  |
| Cadmium  | ppm    | ASTM D5185m |         | <b>&lt;1</b> | 0        | 0  |

### ADDITIVES

|            | method | limit/base  | current | history1    | history2 |      |
|------------|--------|-------------|---------|-------------|----------|------|
| Boron      | ppm    | ASTM D5185m | 250     | <b>58</b>   | 10       | 2    |
| Barium     | ppm    | ASTM D5185m | 10      | <b>0</b>    | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185m | 100     | <b>86</b>   | 81       | 74   |
| Manganese  | ppm    | ASTM D5185m |         | <b>1</b>    | <1       | <1   |
| Magnesium  | ppm    | ASTM D5185m | 450     | <b>480</b>  | 958      | 1080 |
| Calcium    | ppm    | ASTM D5185m | 3000    | <b>1499</b> | 1125     | 1276 |
| Phosphorus | ppm    | ASTM D5185m | 1150    | <b>1160</b> | 998      | 1073 |
| Zinc       | ppm    | ASTM D5185m | 1350    | <b>1307</b> | 1262     | 1424 |
| Sulfur     | ppm    | ASTM D5185m | 4250    | <b>3717</b> | 3104     | 3779 |

### CONTAMINANTS

|           | method | limit/base  | current | history1 | history2 |    |
|-----------|--------|-------------|---------|----------|----------|----|
| Silicon   | ppm    | ASTM D5185m | >25     | <b>9</b> | 8        | 11 |
| Sodium    | ppm    | ASTM D5185m | >158    | <b>4</b> | 2        | 4  |
| Potassium | ppm    | ASTM D5185m | >20     | <b>4</b> | 5        | 8  |

### INFRA-RED




|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | *ASTM D7844 | >3      | <b>0.7</b>  | 0.9      | 0.3  |
| Nitration | Abs/cm   | *ASTM D7624 | >20     | <b>11.2</b> | 12.7     | 14.8 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30     | <b>30.4</b> | 24.7     | 30.0 |

### FLUID DEGRADATION

|                  | method   | limit/base  | current | history1    | history2 |      |
|------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25     | <b>27.6</b> | 23.2     | 26.3 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 8.5     | <b>3.9</b>  | 7.1      | 6.7  |







# OIL ANALYSIS REPORT

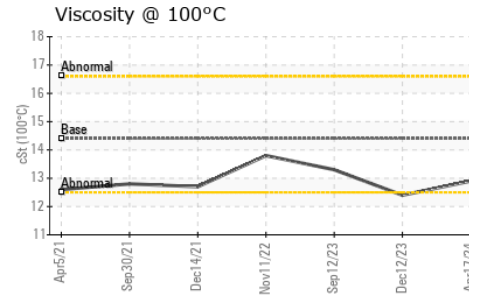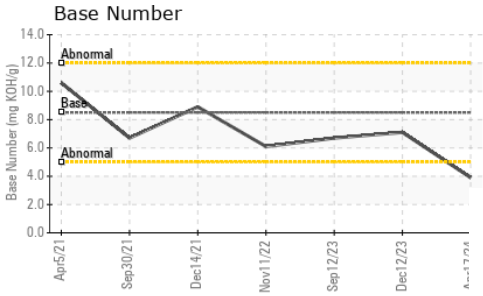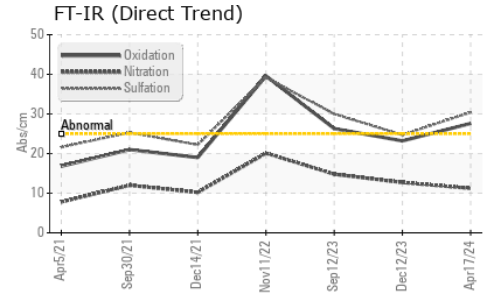

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | 12.9     | 12.4     |

### GRAPHS

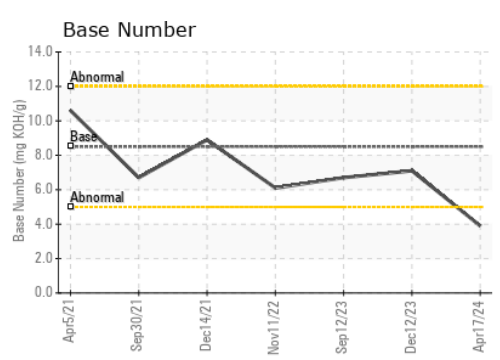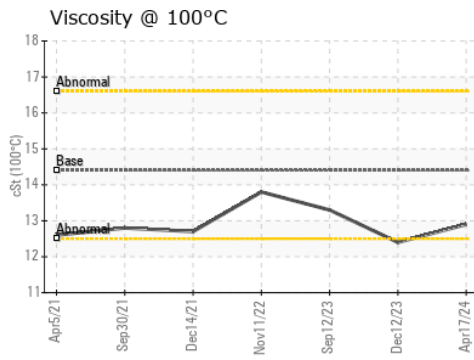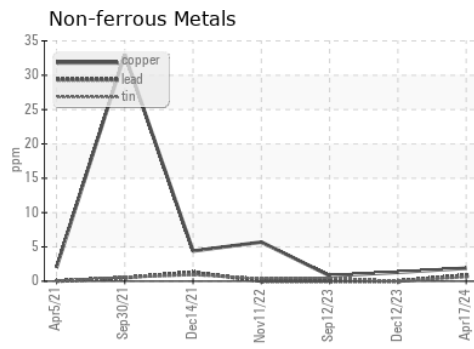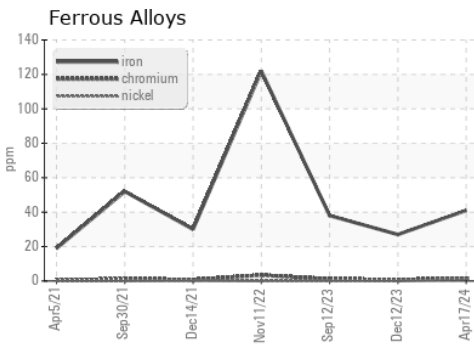

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0903122      **Received** : 25 Apr 2024  
**Lab Number** : 06161094      **Tested** : 29 Apr 2024  
**Unique Number** : 10996517      **Diagnosed** : 29 Apr 2024 - Don Baldrige  
**Test Package** : FLEET

**FRESHPOINT**  
 8801 EXCHANGE DRIVE  
 ORLANDO, FL  
 US 32809  
 Contact: CRAIG EVANS  
 evans\_craig@sbcglobal.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)