




OIL ANALYSIS REPORT

Sample Rating Trend

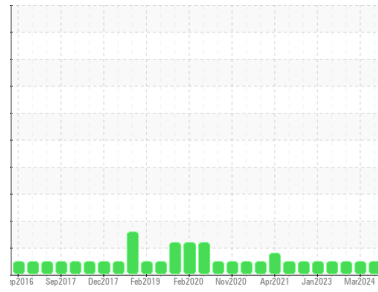

NORMAL



Area
K ROBERTSON - CRANE
 Machine Id
K ROBERTSON
 Component
Main Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (45 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0791849	WC0892621	WC0374983
Sample Date	Client Info		05 Apr 2024	11 Mar 2024	10 Feb 2024
Machine Age	hrs	Client Info	255161	25025	24640
Oil Age	hrs	Client Info	250	500	500
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	3	3	6
Chromium	ppm	ASTM D5185m >8	<1	0	<1
Nickel	ppm	ASTM D5185m >2	<1	0	<1
Titanium	ppm	ASTM D5185m >3	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >15	5	3	3
Lead	ppm	ASTM D5185m >18	1	2	5
Copper	ppm	ASTM D5185m >80	<1	<1	2
Tin	ppm	ASTM D5185m >14	<1	<1	1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 151	380	309	353
Barium	ppm	ASTM D5185m 0.4	0	0	0
Molybdenum	ppm	ASTM D5185m 250	116	120	125
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	631	657	644
Calcium	ppm	ASTM D5185m 2046	1454	1525	1473
Phosphorus	ppm	ASTM D5185m 1043	775	699	728
Zinc	ppm	ASTM D5185m 943	811	829	859
Sulfur	ppm	ASTM D5185m 5012	2963	2792	2701

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	8	5	7
Sodium	ppm	ASTM D5185m >75	3	1	2
Potassium	ppm	ASTM D5185m >20	2	0	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	4.3	6.8	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.8	23.1	23.1


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.9	16.7	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 12.5	9.4	9.0	8.5




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

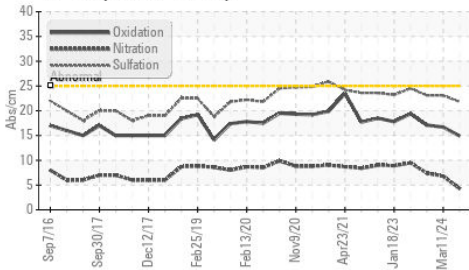

Base Number

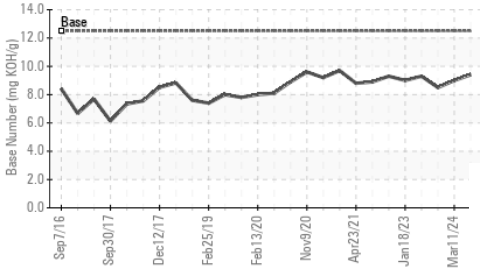

Viscosity @ 100°C

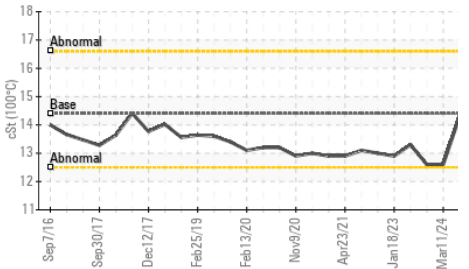


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.3	12.6

GRAPHS


Ferrous Alloys

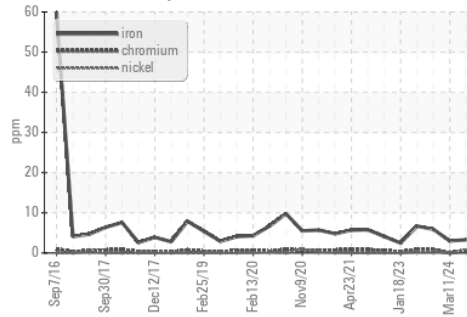


Non-ferrous Metals

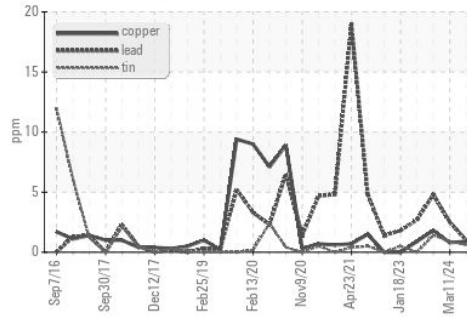

Viscosity @ 100°C

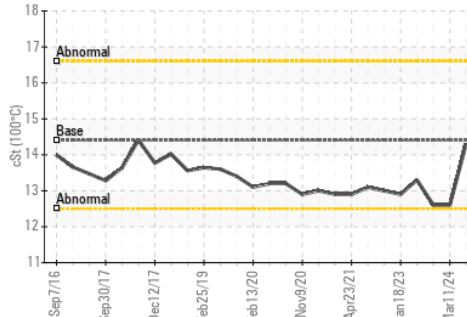

Base Number

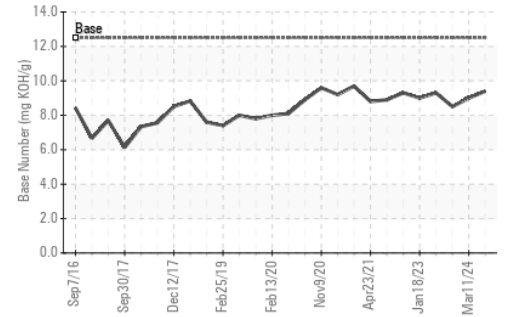

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0791849

Lab Number : 06161124

Unique Number : 10996547

Test Package : FLEET

Received : 25 Apr 2024

Tested : 29 Apr 2024

Diagnosed : 29 Apr 2024 - Don Baldrige

ASSOCIATED TERMINALS - CRANE

CONVENT, LA

US 70723

Contact: GREG JOSEY

gjosey@associatedterminals.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (225)562-3515