




OIL ANALYSIS REPORT

Sample Rating Trend

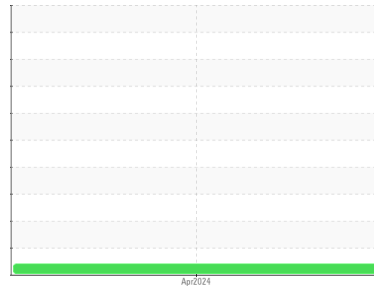

VISCOSITY



Machine Id

2443

Component

Diesel Engine

Fluid

CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0859263	---	---
Sample Date	Client Info		23 Apr 2024	---	---
Machine Age	mls	Client Info	22932	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	46	---	---
Chromium	ppm	ASTM D5185m >20	4	---	---
Nickel	ppm	ASTM D5185m >2	1	---	---
Titanium	ppm	ASTM D5185m >2	<1	---	---
Silver	ppm	ASTM D5185m >2	<1	---	---
Aluminum	ppm	ASTM D5185m >20	29	---	---
Lead	ppm	ASTM D5185m >40	4	---	---
Copper	ppm	ASTM D5185m >330	22	---	---
Tin	ppm	ASTM D5185m >15	3	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	58	---	---
Barium	ppm	ASTM D5185m	2	---	---
Molybdenum	ppm	ASTM D5185m	23	---	---
Manganese	ppm	ASTM D5185m	5	---	---
Magnesium	ppm	ASTM D5185m	788	---	---
Calcium	ppm	ASTM D5185m	1393	---	---
Phosphorus	ppm	ASTM D5185m 760	900	---	---
Zinc	ppm	ASTM D5185m 800	932	---	---
Sulfur	ppm	ASTM D5185m 3000	3628	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	38	---	---
Sodium	ppm	ASTM D5185m	6	---	---
Potassium	ppm	ASTM D5185m >20	100	---	---
Fuel	%	ASTM D3524 >3.0	0.5	---	---

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.3	---	---
Nitration	Abs/cm	*ASTM D7624 >20	10.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.0	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 10	5.6	---	---







OIL ANALYSIS REPORT

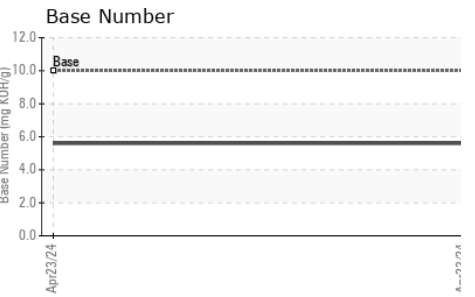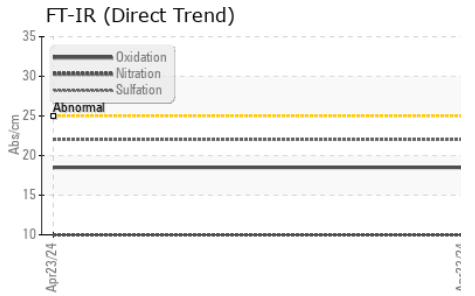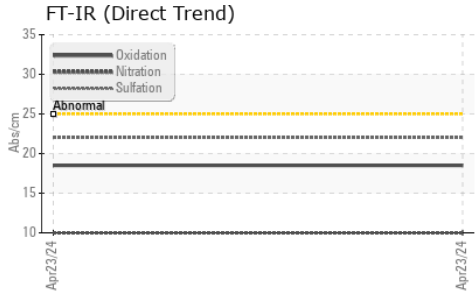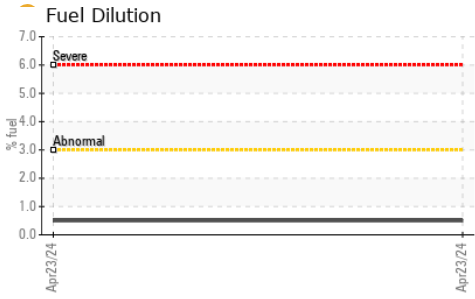

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.6	● 11.5	---	---

GRAPHS

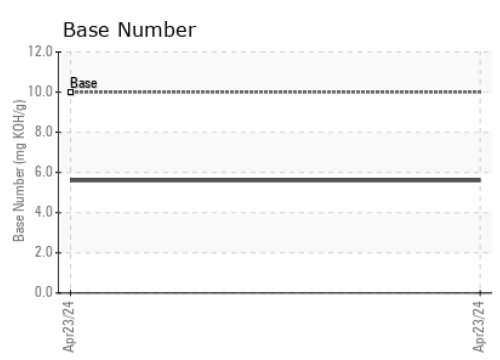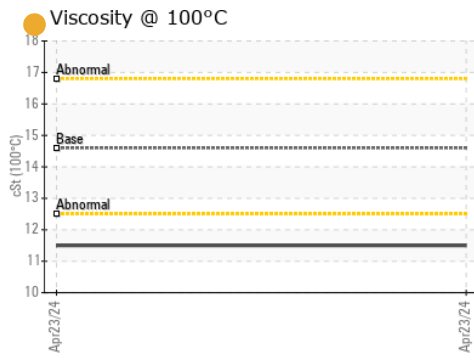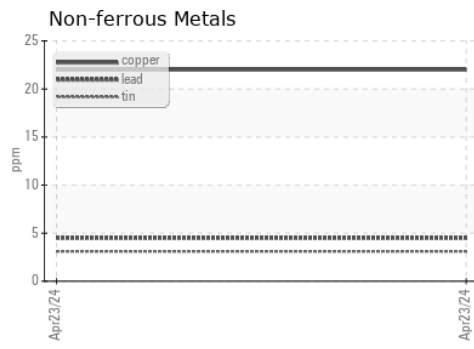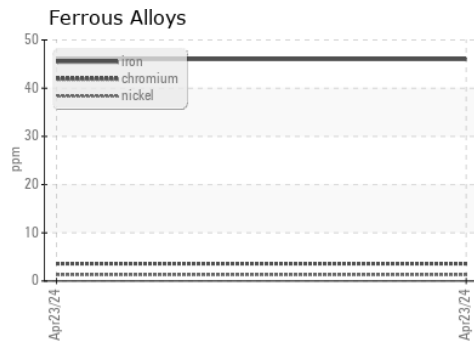

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0859263 **Received** : 25 Apr 2024
Lab Number : 06161127 **Tested** : 30 Apr 2024
Unique Number : 10996550 **Diagnosed** : 30 Apr 2024 - Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Ergon Trucking Inc. - MAG601
 11337 State Route 800
 Magnolia, OH
 US 44643
 Contact: JASON JULIAN
 jason.julian@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)