


OIL ANALYSIS REPORT

Sample Rating Trend

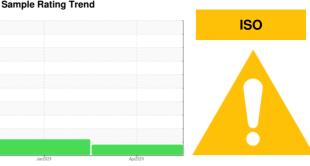

Machine Id **SOUTH PRESS**

Component Hydraulic System

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PE0002642	PE0002635	
Sample Date		Client Info		16 Apr 2024	21 Jan 2024	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	ABNORMAL	
CONTAMINATION	1	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		15	9	
Iron	ppm	ASTM D5185m	>20	1	2	
Chromium	ppm	ASTM D5185m	>10	<1	<1	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	1	1	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>75	10	10	
Tin	ppm	ASTM D5185m	>10	<1	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		2	2	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum					U	
iviorybactianii	ppm	ASTM D5185m		84	83	
•	ppm	ASTM D5185m ASTM D5185m				
	• •			84	83	
Manganese Magnesium	ppm	ASTM D5185m		84	83	
Manganese Magnesium	ppm ppm	ASTM D5185m ASTM D5185m		84 0 0	83 <1 1	
Manganese Magnesium Calcium Phosphorus	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m		84 0 0 49	83 <1 1 57	
Manganese Magnesium Calcium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		84 0 0 49 435	83 <1 1 57 395	
Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	84 0 0 49 435 458	83 <1 1 57 395 470	
Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >20	84 0 0 49 435 458 1255	83 <1 1 57 395 470 1111	
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		84 0 0 49 435 458 1255	83 <1 1 57 395 470 1111 history1	 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m		84 0 0 49 435 458 1255 current	83 <1 1 57 395 470 1111 history1	 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m	>20	84 0 0 49 435 458 1255 current 9 <1	83 <1 1 57 395 470 1111 history1 3	history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m MEthod ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>20 >20	84 0 0 49 435 458 1255 current 9 <1	83 <1 1 57 395 470 1111 history1 3 1	history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	>20 >20	84 0 0 49 435 458 1255 current 9 <1 0	83 <1 1 57 395 470 1111 history1 3 1 0 history1	history2 history2



OIL ANALYSIS REPORT

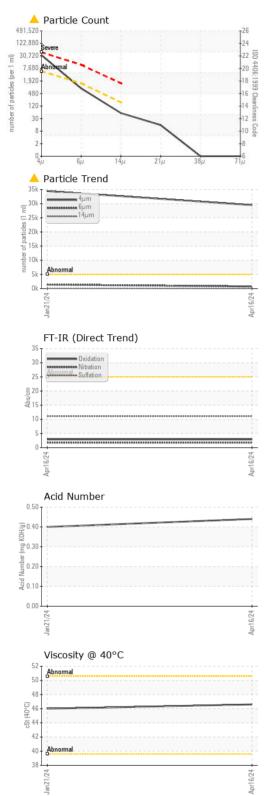

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	29476	▲ 34402	
Particles >6µm		ASTM D7647	>1300	748	1413	
Particles >14µm		ASTM D7647	>160	49	85	
Particles >21µm		ASTM D7647	>40	13	23	
Particles >38µm		ASTM D7647	>10	0	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>22/17/13</u>	<u>^</u> 22/18/14	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414		2.9		
Acid Number (AN)	mg KOH/g	ASTM D8045		0.44	0.40	
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPERT	TES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		46.6	46.0	
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						no image
Bottom						no image





Laboratory Sample No.

: PE0002642 Lab Number : 06161343

Unique Number : 10996766

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received : 26 Apr 2024 **Tested** : 29 Apr 2024 Diagnosed : 30 Apr 2024 - Jonathan Hester

PRESSCO 4049 CARSON AVE HAZELGREEN RD NE

SALEM, OR US 97305 Test Package: PLANT (Additional Tests: FT-IR, ICP, KV40, OxidationStability, PQ, PrtCount, SCORDFEAC): Service Manager

Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - PRESAL

T:

F: