

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

3 FRICK (S/N 10241B02848394)

Refrigeration Compressor

USPI 1009-68 SC (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

22014 Feb2016 Jan2017 May2018 Jul2019 Nov2020 Feb2022 Apr2023							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		USP0006678	USP0005430	USP0002788	
Sample Date		Client Info		23 Apr 2024	29 Jan 2024	24 Oct 2023	
Machine Age	hrs	Client Info		1830	590	57974	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				NORMAL	NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>8	0	0	2	
Chromium	ppm	ASTM D5185m	>2	0	0	0	
Nickel	ppm	ASTM D5185m		0	<1	0	
Titanium	ppm	ASTM D5185m		0	0	<1	
Silver	ppm	ASTM D5185m	>2	0	0	0	
Aluminum	ppm	ASTM D5185m	>3	0	<1	0	
Lead	ppm	ASTM D5185m	>2	0	<1	0	
Copper	ppm	ASTM D5185m	>8	0	0	<1	
Tin	ppm	ASTM D5185m	>4	0	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	<1	
Magnesium	ppm	ASTM D5185m		0	1	0	
Calcium	ppm	ASTM D5185m		0	0	0	
Phosphorus	ppm	ASTM D5185m		0	<1	0	
Zinc	ppm	ASTM D5185m		0	0	0	
Sulfur	ppm	ASTM D5185m	50	0	8	8	
CONTAMINANTS	;	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	0	<1	<1	
Sodium	ppm	ASTM D5185m		<1	<1	1	
Potassium	ppm	ASTM D5185m	>20	0	2	<1	
Water	%	ASTM D6304	>0.01	0.003	0.004	0.003	
ppm Water	ppm	ASTM D6304	>100	34	42	39.9	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>10000	2261	2267	▲ 43552	
Particles >6µm		ASTM D7647	>2500	386	336	<u>▲</u> 5479	
Particles >14µm		ASTM D7647	>320	23	23	59	
Particles >21µm		ASTM D7647	>80	7	9	9	
Particles >38µm		ASTM D7647	>20	1	1	0	
Particles >71µm		ASTM D7647	>4	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/16/12	18/16/12	<u>\$\rightarrow\$ 23/20/13</u>	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2	
Acid Number (AN)	I/OLI/-	ACTM DOZA	0.005	0.014	0.014	0.010	

Acid Number (AN)

0.014


0.014


mg KOH/g ASTM D974 0.005


0.013





OIL ANALYSIS REPORT












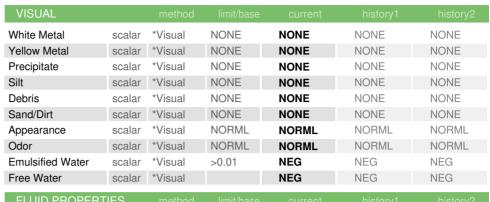

I LOID I HOI LI	TILO	memou			HISTOLAL	HISTOLYZ
Visc @ 40°C	cSt	ASTM D445	67	66.8	65.5	67.8


SAMPLE	IMAGES



Bottom

Color



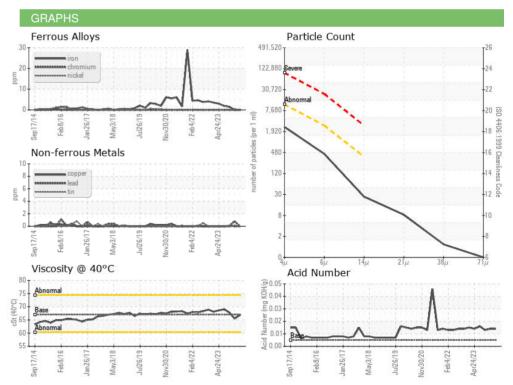





Certificate 12367

Laboratory Sample No.

Test Package : IND 2

Lab Number : 06161502

: USP0006678 Unique Number : 10996925

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 26 Apr 2024

Tested : 30 Apr 2024 Diagnosed : 30 Apr 2024 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CON AGRA FOODS / LAMB WESTON - LAMDEL

DEL, LA

Contact:

US

T:

F: