


OIL ANALYSIS REPORT

Sample Rating Trend

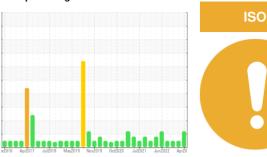

Machine Id

30-3 GEA ER2 (S/N Z0786)

Refrigeration Compressor

USPI ALT-68 SC (70 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

ν2016 Αφέδ117 Jul2016 Μω/2019 Νεν2019 Οκε2020 Jul2021 Jun2022 Αφε20									
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		USP0006661	USP0004808	USP0001094			
Sample Date		Client Info		25 Apr 2024	03 Jan 2024	11 Oct 2023			
Machine Age	hrs	Client Info		46822	44851	43485			
Oil Age	hrs	Client Info		0	0	0			
Oil Changed		Client Info		N/A	N/A	N/A			
Sample Status				ATTENTION	NORMAL	NORMAL			
WEAR METALS		method	limit/base	current	history1	history2			
Iron	ppm	ASTM D5185m	>8	0	0	0			
Chromium	ppm	ASTM D5185m	>2	0	<1	0			
Nickel	ppm	ASTM D5185m		0	0	0			
Titanium	ppm	ASTM D5185m		0	0	0			
Silver	ppm	ASTM D5185m	>2	0	0	0			
Aluminum	ppm	ASTM D5185m	>3	0	0	0			
Lead	ppm	ASTM D5185m	>2	0	0	0			
Copper	ppm	ASTM D5185m	>8	0	0	0			
Tin	ppm	ASTM D5185m	>4	0	0	0			
Vanadium	ppm	ASTM D5185m		0	0	0			
Cadmium	ppm	ASTM D5185m		0	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m		0	0	0			
Barium	ppm	ASTM D5185m		0	0	0			
Molybdenum	ppm	ASTM D5185m		0	0	0			
Manganese	ppm	ASTM D5185m		0	0	0			
Magnesium	ppm	ASTM D5185m		0	0	0			
Calcium	ppm	ASTM D5185m		0	0	0			
Phosphorus	ppm	ASTM D5185m		0	0	0			
Zinc	ppm	ASTM D5185m		0	0	0			
Sulfur	ppm	ASTM D5185m	50	0	0	0			
CONTAMINANTS	3	method	limit/base	current	history1	history2			
Silicon	ppm	ASTM D5185m	>15	0	0	<1			
Sodium	ppm	ASTM D5185m		0	0	0			
Potassium	ppm	ASTM D5185m	>20	0	<1	0			
Water	%	ASTM D6304	>0.01	0.003	0.002	0.001			
ppm Water	ppm	ASTM D6304	>100	37	19	12.6			
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2			
Particles >4µm		ASTM D7647	>10000	13215	3730	3585			
Particles >6µm		ASTM D7647	>2500	2996	620	1050			
Particles >14µm		ASTM D7647	>640	154	22	77			
Particles >21µm		ASTM D7647	>160	33	5	18			
Particles >38µm		ASTM D7647	>40	3	0	1			
Particles >71µm		ASTM D7647	>10	0	0	0			
Oil Cleanliness		ISO 4406 (c)	>20/18/16	2 1/19/14	19/16/12	19/17/13			
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2			
Asid Number (ANI)	I/OII/-	ACTM DOZA	0.005	0.014	0.014	0.014			

Acid Number (AN)

0.014


0.014


mg KOH/g ASTM D974 0.005


0.014





OIL ANALYSIS REPORT












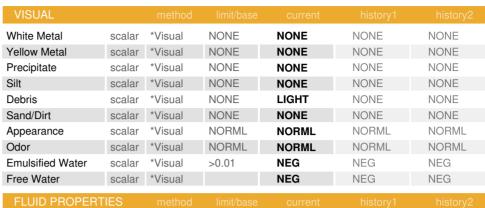

Visc @ 40°C	cSt	ASTM D445	65.6	68.1	68.0	67.3

SAMPLE IMAGES

491.5

Particle Count



GRAPHS

Ferrous Alloys


Color

Bottom

per 1 Non-ferrous Metals Viscosity @ 40°C



Jan 3/24





Certificate 12367

Laboratory Sample No. Lab Number : 06161504

: USP0006661 Unique Number : 10996927 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 26 Apr 2024

Tested : 30 Apr 2024 Diagnosed : 30 Apr 2024 - Jonathan Hester KraftHeinz - Newberry - Plant 8335

3704 LOUIS RICH DR NEWBERRY, SC US 29108

Contact:

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)