

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

FRICK TYSTVDC 3 (S/N U154300323)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


12015 Feb2016 Apr2017 Ju2018 Ju2019 Nov2020 Nov2021 Apr2023							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		USP0006610	USP0005455	USP0002823	
Sample Date		Client Info		27 Apr 2024	31 Jan 2024	26 Oct 2023	
Machine Age	hrs	Client Info		0	0	0	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				NORMAL	NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>8	0	0	0	
Chromium	ppm	ASTM D5185m	>2	0	0	<1	
Nickel	ppm	ASTM D5185m		0	0	<1	
Titanium	ppm	ASTM D5185m		<1	<1	<1	
Silver	ppm	ASTM D5185m	>2	0	0	0	
Aluminum	ppm	ASTM D5185m	>3	0	0	1	
Lead	ppm	ASTM D5185m	>2	0	<1	0	
Copper	ppm	ASTM D5185m	>8	0	0	<1	
Tin	ppm	ASTM D5185m	>4	0	<1	<1	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	<1	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	<1	
Manganese	ppm	ASTM D5185m		<1	0	0	
Magnesium	ppm	ASTM D5185m		0	0	0	
Calcium	ppm	ASTM D5185m		0	0	0	
Phosphorus	ppm	ASTM D5185m		0	0	0	
Zinc	ppm	ASTM D5185m		0	0	0	
Sulfur	ppm	ASTM D5185m	50	0	0	0	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	0	<1	<1	
Sodium	ppm	ASTM D5185m		1	0	2	
Potassium	ppm	ASTM D5185m	>20	0	0	2	
Water	%	ASTM D6304	>0.01	0.004	0.004	0.007	
ppm Water	ppm	ASTM D6304	>100	41	46	75.5	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647		754	566	1967	
Particles >6µm		ASTM D7647	>2500	225	106	373	
Particles >14µm		ASTM D7647	>320	17	13	17	
Particles >21µm		ASTM D7647	>80	4	3	3	
Particles >38µm		ASTM D7647	>20	1	1	0	
Particles >71µm		ASTM D7647	>4	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>/18/15	17/15/11	16/14/11	18/16/11	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.015	0.014	0.014	





OIL ANALYSIS REPORT













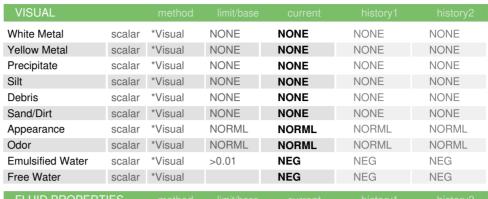

FLUID PROPER	THES	method			riistory i	History
Visc @ 40°C	cSt	ASTM D445	65.6	67.0	67.1	65.9

SAMPLE IMAGES	metnoa	ilmit/base	current	
Color				



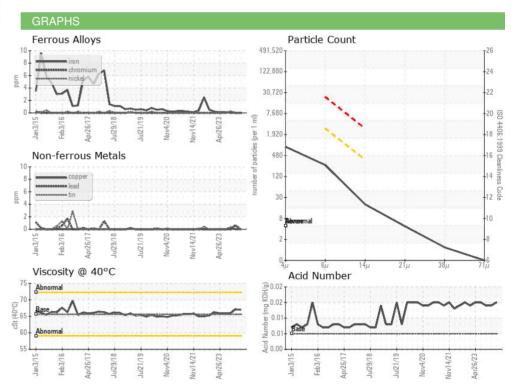





Certificate 12367

Laboratory Sample No. Lab Number

: 06161557

: USP0006610 Unique Number : 10996980 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 26 Apr 2024

Tested : 30 Apr 2024 Diagnosed

: 30 Apr 2024 - Jonathan Hester

TYSON TVDC-RUSSELVILLE-USP HWY 64 EAST

RUSSELLVILLE, AR US 72801

T: (479)968-5110

F: (479)964-8190

Contact: JOHN BRADFORD

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)