




# OIL ANALYSIS REPORT

Sample Rating Trend

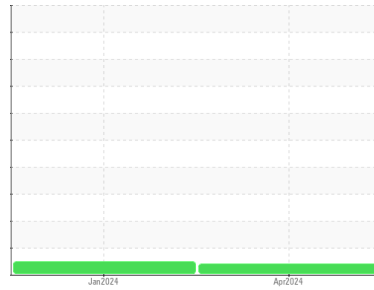

VIS DEBRIS



Area

**VACUUM PUMP**

Machine Id

**VACPUMP-056 (S/N API695103)**

Component

**Compressor**

Fluid

**ATLAS SYN VAC FLUID (--- GAL)**

## DIAGNOSIS

### Recommendation

We suspect abnormal contamination may be due to sampling method. We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0920583</b>	WC0774629	---
Sample Date	Client Info			<b>19 Apr 2024</b>	09 Jan 2024	---
Machine Age	Client Info			<b>3818</b>	2637	---
Oil Age	Client Info			<b>3818</b>	2637	---
Oil Changed	Client Info			<b>N/A</b>	Not Changd	---
Sample Status				<b>MARGINAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m		<b>7</b>	2	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m	>65	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>65	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	---
Calcium	ppm	ASTM D5185m		<b>9</b>	1	---
Phosphorus	ppm	ASTM D5185m		<b>9</b>	6	---
Zinc	ppm	ASTM D5185m		<b>5</b>	0	---
Sulfur	ppm	ASTM D5185m		<b>48</b>	0	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	<b>6</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>16</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.059</b>	0.09	---





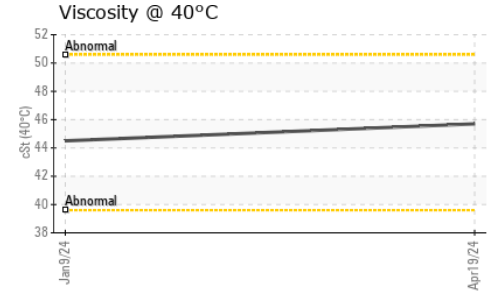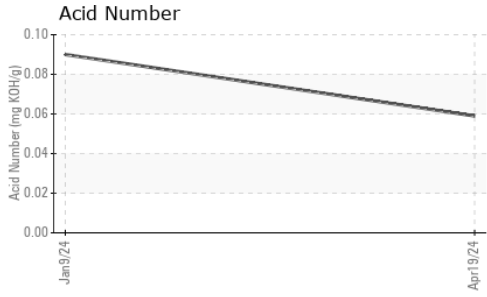

# OIL ANALYSIS REPORT







VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.7	44.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color					no image
Bottom					no image

## GRAPHS

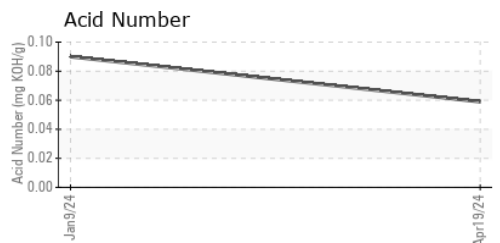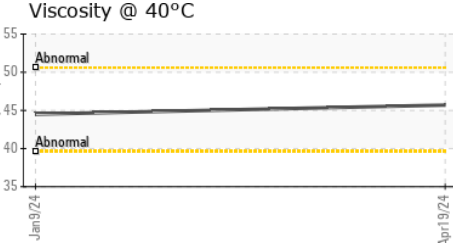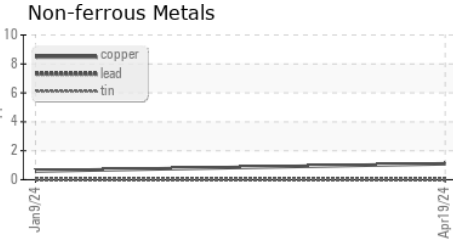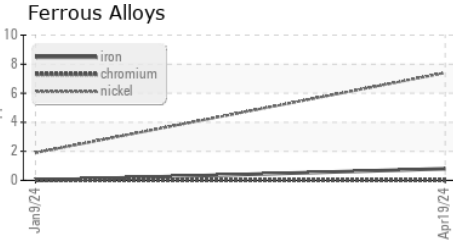

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0920583      **Received** : 26 Apr 2024  
**Lab Number** : 06161601      **Tested** : 30 Apr 2024  
**Unique Number** : 10997024      **Diagnosed** : 30 Apr 2024 - Doug Bogart  
**Test Package** : IND 2

**PRINSCO - BERESFORD**  
 600 NORTH 16TH ST  
 BERESFORD, SD  
 US 57004  
 Contact: CHRIS SETNAR  
 christopher.setnar@prinsco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)