




PROBLEM SUMMARY

Sample Rating Trend



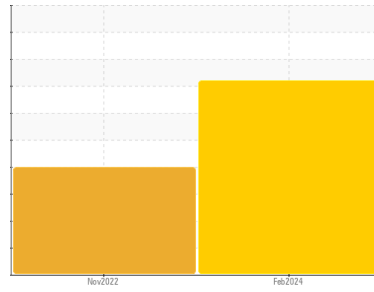


DIRT



Machine Id
40-206L
 Component
Left Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

COMPONENT CONDITION SUMMARY

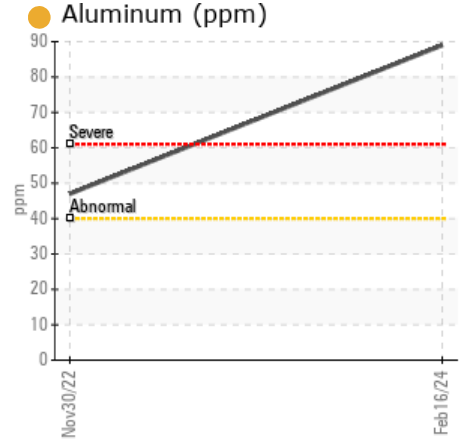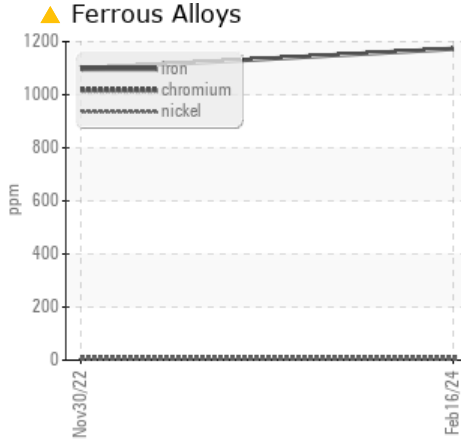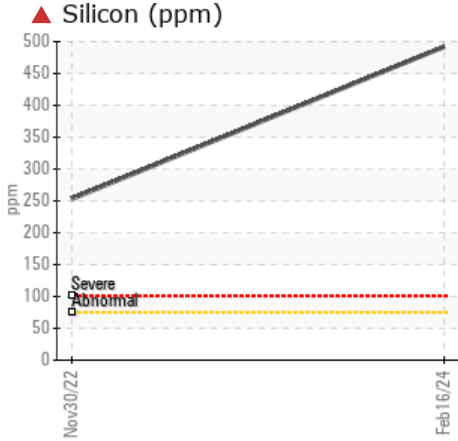

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	---
Iron	ppm	ASTM D5185m	>750	▲ 1173	▲ 1098	---
Chromium	ppm	ASTM D5185m	>9	▲ 10	▲ 10	---
Silicon	ppm	ASTM D5185m	>75	▲ 492	▲ 253	---

Customer Id: MANTUL
 Sample No.: WC0936919
 Lab Number: 06174334
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Dirt Access	---	---	?	We advise that you check all areas where dirt can enter the system.

HISTORICAL DIAGNOSIS

30 Nov 2022 Diag: Don Baldrige

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor. Gear wear is indicated. All other metal levels are typical for a new component breaking in. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The condition of the oil is acceptable for the time in service.

DIRT




view report





OIL ANALYSIS REPORT

Sample Rating Trend

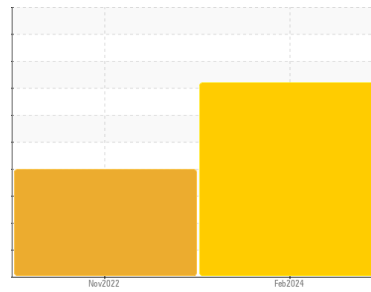

DIRT



Machine Id
40-206L
 Component
Left Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check all areas where dirt can enter the system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

▲ Wear

Gear wear is indicated.

▲ Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0936919	WC0709381	---
Sample Date	Client Info		16 Feb 2024	30 Nov 2022	---
Machine Age	hrs	Client Info	2648	1600	---
Oil Age	hrs	Client Info	0	1600	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			SEVERE	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.075	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >750	▲ 1173	▲ 1098	---
Chromium	ppm	ASTM D5185m >9	▲ 10	▲ 10	---
Nickel	ppm	ASTM D5185m >10	3	4	---
Titanium	ppm	ASTM D5185m	5	3	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >40	● 89	● 47	---
Lead	ppm	ASTM D5185m >15	0	<1	---
Copper	ppm	ASTM D5185m >40	2	3	---
Tin	ppm	ASTM D5185m >10	0	<1	---
Vanadium	ppm	ASTM D5185m	<1	<1	---
Cadmium	ppm	ASTM D5185m	0	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	238	43	---
Barium	ppm	ASTM D5185m 200	2	4	---
Molybdenum	ppm	ASTM D5185m 12	<1	<1	---
Manganese	ppm	ASTM D5185m	10	12	---
Magnesium	ppm	ASTM D5185m 12	5	10	---
Calcium	ppm	ASTM D5185m 150	38	65	---
Phosphorus	ppm	ASTM D5185m 1650	1074	1100	---
Zinc	ppm	ASTM D5185m 125	11	31	---
Sulfur	ppm	ASTM D5185m 22500	23191	23450	---

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	▲ 492	▲ 253	---
Sodium	ppm	ASTM D5185m >170	5	4	---
Potassium	ppm	ASTM D5185m >20	18	19	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual NONE	NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	LIGHT	---
Debris	scalar	*Visual NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual >0.075	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---



OIL ANALYSIS REPORT

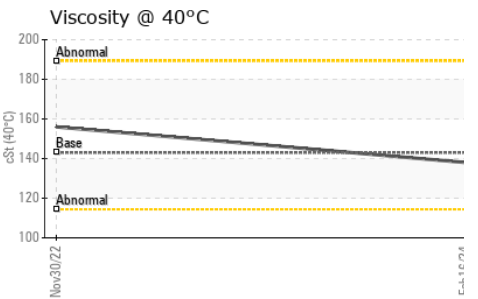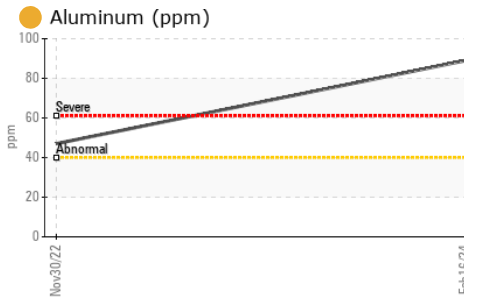
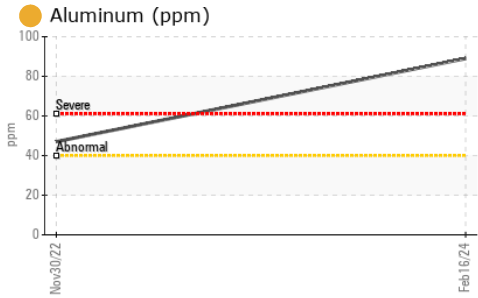
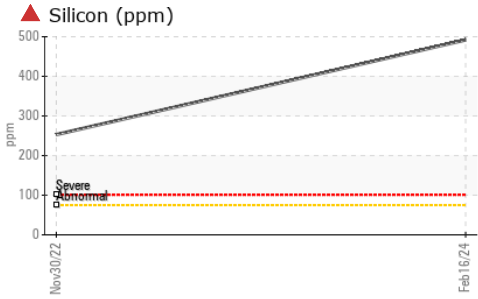


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 143	138	156	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

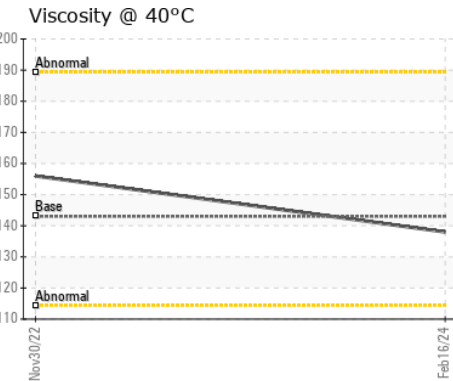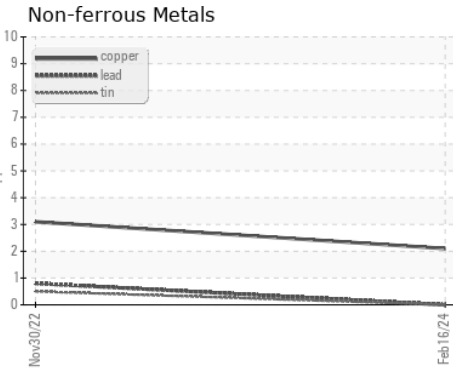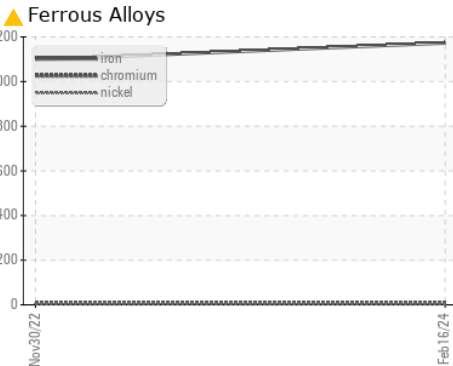

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0936919
Lab Number : 06174334
Unique Number : 11020387
Test Package : CONST

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 13 May 2024 - Don Baldrige

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146
 Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)