


OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

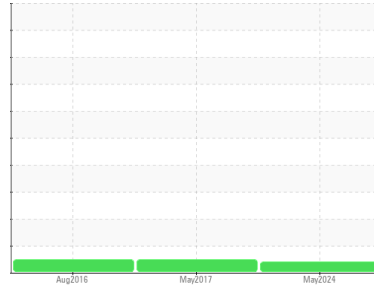

Area
[W05004186]
 Machine Id
VOLVO A40F 11613
 Component
Bogie/Center Axle
 Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (10 GAL)



DIAGNOSIS

● Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W05004186)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

● Fluid Condition

The oil viscosity is higher than normal. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0001022	VCP192425	VCP195665
Sample Date	Client Info		02 May 2024	23 May 2017	30 Aug 2016
Machine Age	hrs	Client Info	15926	6189	4160
Oil Age	hrs	Client Info	2000	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ATTENTION	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>340	9	8	75
Chromium	ppm	ASTM D5185m	>5	<1	<1	1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>22	2	<1	3
Lead	ppm	ASTM D5185m	>4	0	0	<1
Copper	ppm	ASTM D5185m	>10	<1	<1	<1
Tin	ppm	ASTM D5185m	>2	<1	0	0
Antimony	ppm	ASTM D5185m	>5	---	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		275	232	114
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	<1	1
Manganese	ppm	ASTM D5185m		0	0	2
Magnesium	ppm	ASTM D5185m		25	1	4
Calcium	ppm	ASTM D5185m		156	21	186
Phosphorus	ppm	ASTM D5185m		972	2306	822
Zinc	ppm	ASTM D5185m		92	17	85
Sulfur	ppm	ASTM D5185m		20878	28533	21898


CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>160	2	<1	3
Sodium	ppm	ASTM D5185m		0	2	<1
Potassium	ppm	ASTM D5185m	>20	1	0	0

VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT



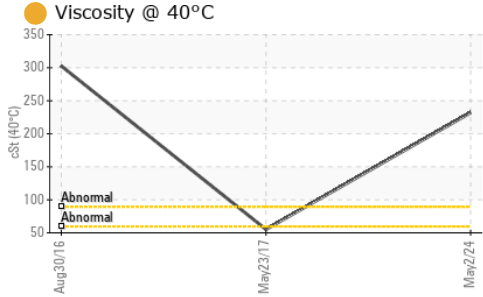


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	● 232	55.15	302.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

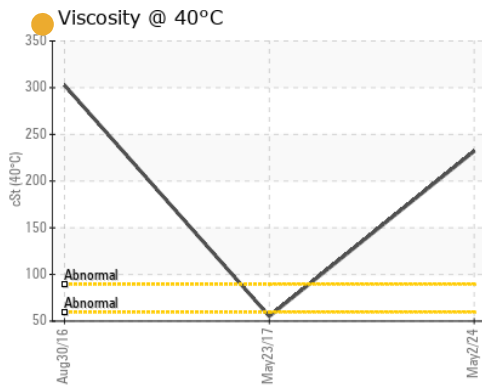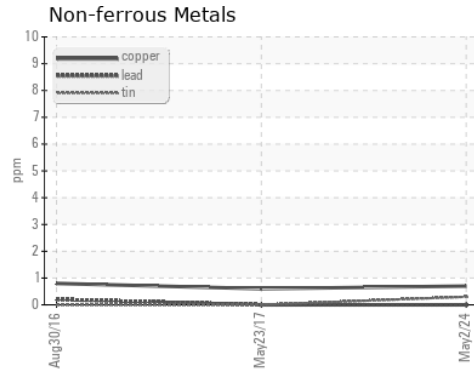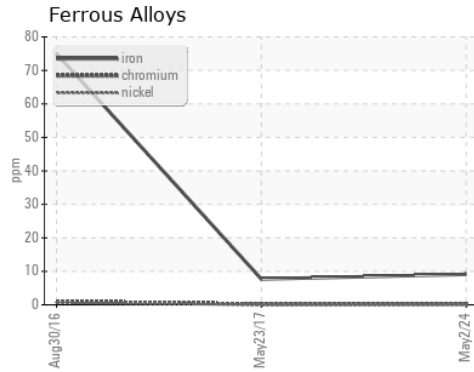

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001022
Lab Number : 06174369
Unique Number : 11020422
Test Package : CONST

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 13 May 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110
 Contact: MIKE MAYHUGH
 MMYAHUGH@MCCLUNG-LOGAN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (703)393-7344

F: (703)393-7844