




# OIL ANALYSIS REPORT

Sample Rating Trend

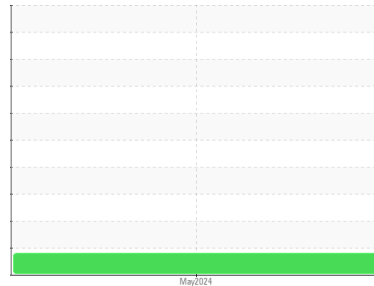

**WEAR**



Machine Id  
**13404**  
 Component  
**Rear Differential**  
 Fluid  
**TDTO FLUID SAE 30 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Bearing and/or bushing wear is indicated. All other metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0888208</b>	---	---
Sample Date	Client Info			<b>03 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1832</b>	---	---
Oil Age	hrs	Client Info		<b>1832</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>148</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>10</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>▲ 128</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	37	<b>8</b>	---	---
Barium	ppm	ASTM D5185m	7	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	5	<b>3</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	40	<b>9</b>	---	---
Calcium	ppm	ASTM D5185m	2650	<b>3105</b>	---	---
Phosphorus	ppm	ASTM D5185m	1050	<b>1116</b>	---	---
Zinc	ppm	ASTM D5185m	1075	<b>1203</b>	---	---
Sulfur	ppm	ASTM D5185m	5750	<b>8805</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>23</b>	---	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---






# OIL ANALYSIS REPORT

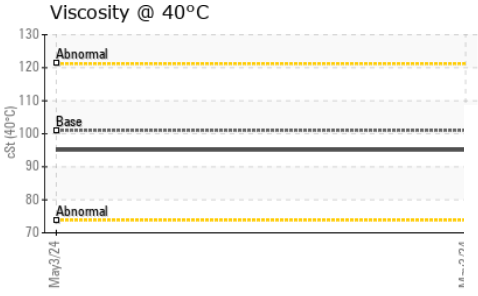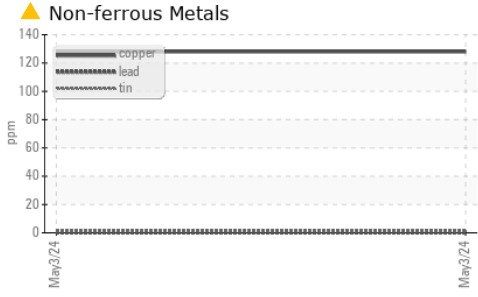

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 101	<b>95.1</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

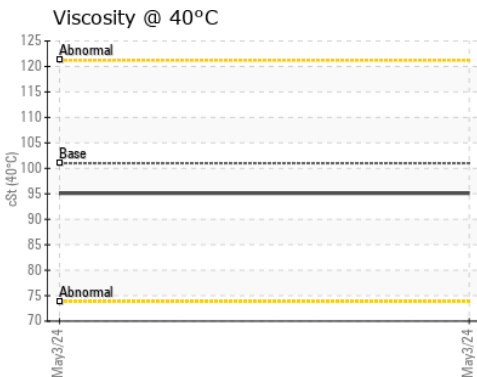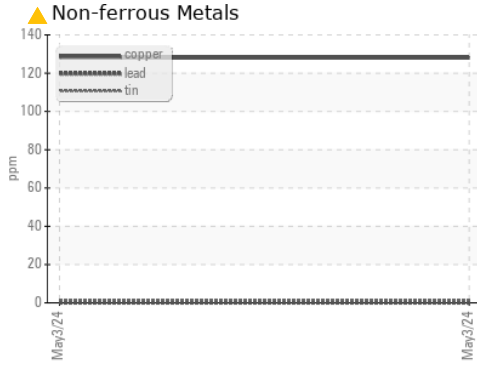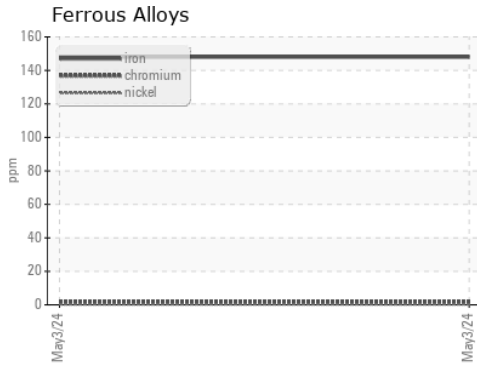

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0888208  
**Lab Number** : **06174406**  
**Unique Number** : 11020459  
**Test Package** : CONST  
**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 13 May 2024 - Don Baldrige

**TRADER CONSTRUCTION CO.**  
 PO DRAWER 1578  
 NEW BERN, NC  
 US 28563  
 Contact: MIKE WYATT  
 mwyatt@traderconstruction.com  
 T: (252)633-1399  
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)