




# OIL ANALYSIS REPORT

Sample Rating Trend

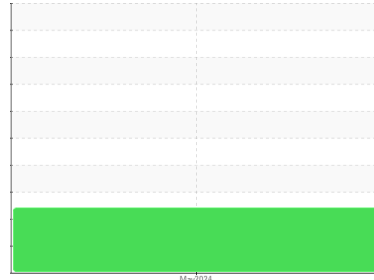

**WEAR**



Machine Id

## TOTE 239

Component

### Hydraulic System

Fluid

### SHELL OMALA S2 GX 68 (275 GAL)

#### DIAGNOSIS

##### ▲ Recommendation

The filtration at the time of sampling has been noted. Resample at the next service interval to monitor.

##### ▲ Wear

The iron level is abnormal. All other component wear rates are normal.

##### ▲ Contamination

There is a high amount of particulates present in the oil.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

#### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TLC0001388</b>	---	---
Sample Date	Client Info		<b>06 May 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Filtered</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

#### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>▲ 45</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m >20	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >20	<b>1</b>	---	---
Tin	ppm	ASTM D5185m >20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

#### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>1</b>	---	---
Calcium	ppm	ASTM D5185m	<b>328</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>260</b>	---	---
Zinc	ppm	ASTM D5185m	<b>41</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>8361</b>	---	---

#### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m	<b>16</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	---	---
Water	%	ASTM D6304 >0.05	<b>NEG</b>	---	---

#### FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 138126</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 60465</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>▲ 299</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>12</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 24/23/15</b>	---	---

#### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.13</b>	---	---



# OIL ANALYSIS REPORT

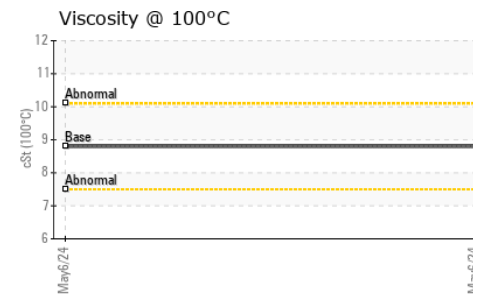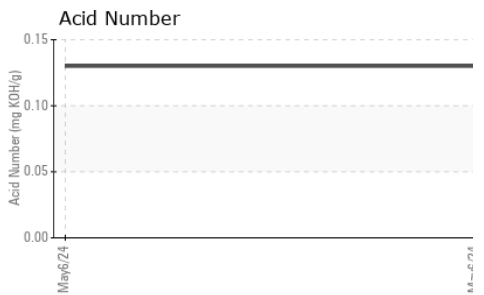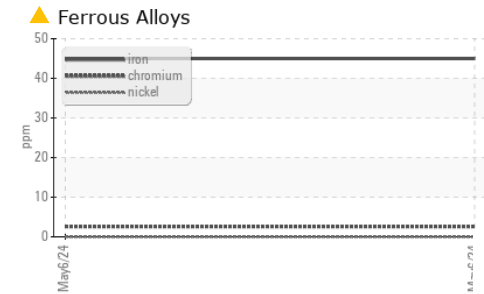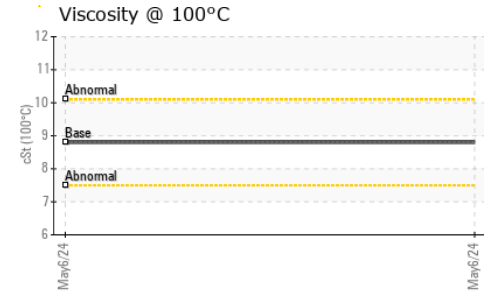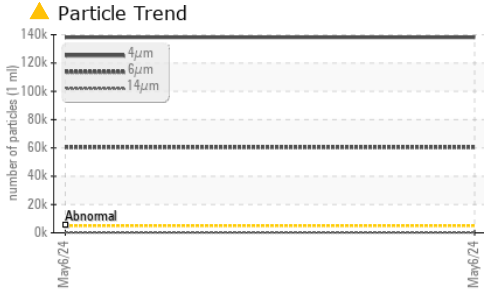




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	<b>67.49</b>	---
Visc @ 100°C	cSt	ASTM D445	8.8	<b>8.8</b>	---
Viscosity Index (VI)	Scale	ASTM D2270	101	<b>102</b>	---

## SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

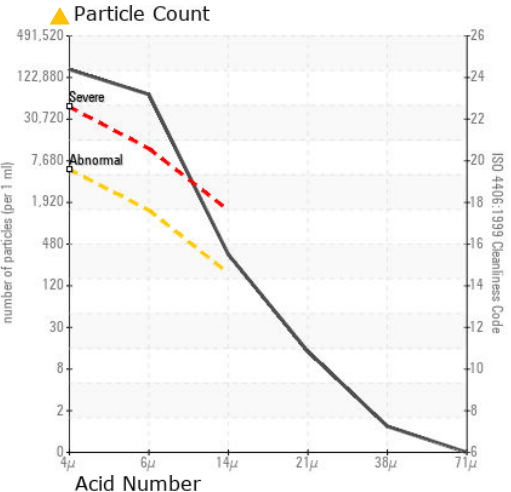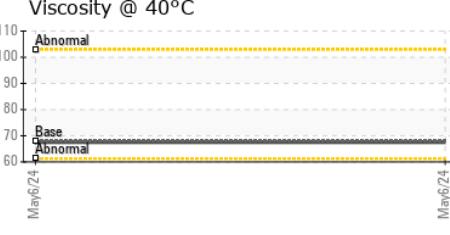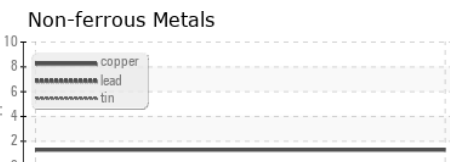

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TLC0001388 **Received** : 09 May 2024  
**Lab Number** : 06174530 **Tested** : 21 May 2024  
**Unique Number** : 11020583 **Diagnosed** : 21 May 2024 - Doug Bogart  
**Test Package** : PLANT ( Additional Tests: KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JTEKT**  
 615 TORRINGTON DR  
 DAHLONEGA, GA  
 US 30533  
 Contact: JEFF CHARAMEDA  
 jeff.charameda@quakerhoughton.com  
 T: (706)864-7691  
 F: