

OIL ANALYSIS REPORT

Sample Rating Trend



Area HPU28 Machine Id HTS20

Hydraulic System

CASTROL BRAYCO MICRONIC 882 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0896079	WC0729519	WC0729537
Sample Date		Client Info		06 May 2024	03 Apr 2023	01 Nov 2022
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	0	0	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		2	0	1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	<1	2
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		671	660	729
Zinc	ppm	ASTM D5185m		4	6	3
Sulfur	ppm	ASTM D5185m		0	0	8
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	1
Water	%	ASTM D6304	>0.05	0.017	0.020	0.019
ppm Water	ppm	ASTM D6304	>500	171	200.2	193.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	456	1322	1309
Particles >6µm		ASTM D7647	>1300	85	368	406
Particles >14µm		ASTM D7647	>160	15	50	64
Particles >21µm		ASTM D7647		6	17	31
Particles >38µm		ASTM D7647	>10	0	1	3
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/14/11	18/16/13	18/16/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.014	0.946	0.763	0.946



OIL ANALYSIS REPORT

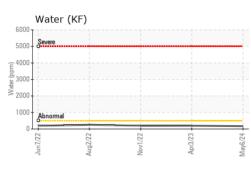




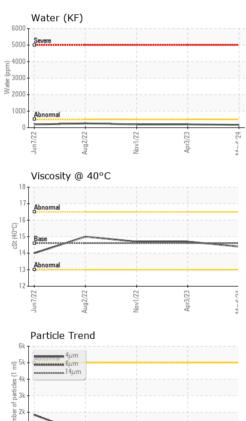

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298		0.852	0.851	0.851
Visc @ 40°C	cSt	ASTM D445	14.6	14.4	14.7	14.7
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color						

Bottom

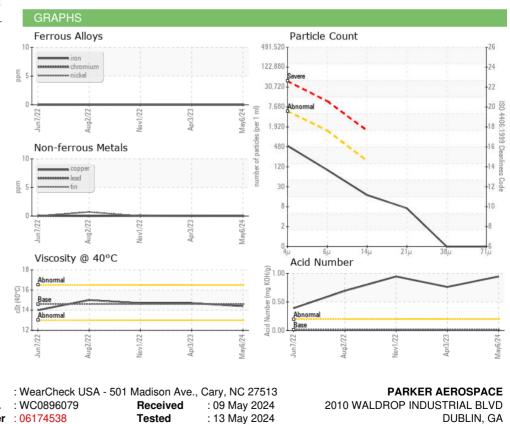



ug2/22

0

à	Laboratory
ANAR	Sample No.
ACCREDITED	Lab Number
TESTING LABORATORY	Unique Number
Certificate L2367	Test Package

ur3/73

Tested Diagnosed Test Package : IND 2 (Additional Tests: KF, SpecGravity)

: 13 May 2024 : 13 May 2024 - Angela Borella

DUBLIN, GA US 31021 Contact: TRENT MCADAMS trent.mcadams@parker.com T: (478)275-4030 F:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: 11020591

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Report Id: PARDUBGA [WUSCAR] 06174538 (Generated: 05/13/2024 14:03:52) Rev: 1

Submitted By: TRENT MCADAMS