


OIL ANALYSIS REPORT

Sample Rating Trend

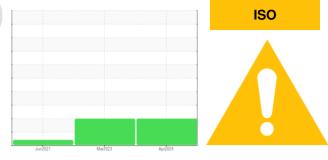

Machine Id

KAESER 5506989

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATON	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013310	KCP54618	KCP32108
Sample Date		Client Info		24 Apr 2024	08 Mar 2023	24 Jun 2021
Machine Age	hrs	Client Info		23325	20343	15511
Oil Age	hrs	Client Info		2982	5000	7407
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		0	6	7
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppin			-	-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	16
Barium	ppm	ASTM D5185m	90	4	0	0
Volybdenum	ppm	ASTM D5185m	0	0	<1	0
Vanganese	ppm	ASTM D5185m		0	<1	0
Vagnesium	ppm	ASTM D5185m	100	50	21	7
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	4	2
Zinc	ppm	ASTM D5185m	0	3	16	26
Sulfur	ppm	ASTM D5185m	23500	22811	22570	17397
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	13	3	4
Sodium	ppm	ASTM D5185m		10	2	2
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water	%	ASTM D6304	>0.05	0.015	0.014	0.011
opm Water	ppm	ASTM D6304	>500	158	144.3	119.2
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		37809	4617	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u> </u>	
Particles >14µm		ASTM D7647	>80	A 3015	426	
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	
- Particles >38μm		ASTM D7647	>4	4 5	6	
Particles >71µm		ASTM D7647	>3	1	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 22/21/19	▲ 19/18/16	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2


Report Id: MELSAC [WUSCAR] 06174621 (Generated: 05/13/2024 13:53:46) Rev: 1


Contact/Location: Service Manager - MELSAC




OIL ANALYSIS REPORT





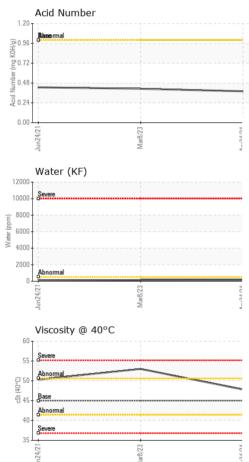

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
FLUID PROPERT Visc @ 40°C	IES cSt	method ASTM D445	limit/base 45	current 47.8	history1 53.0	history2 50.3
	cSt					
Visc @ 40°C	cSt	ASTM D445	45	47.8	53.0	50.3

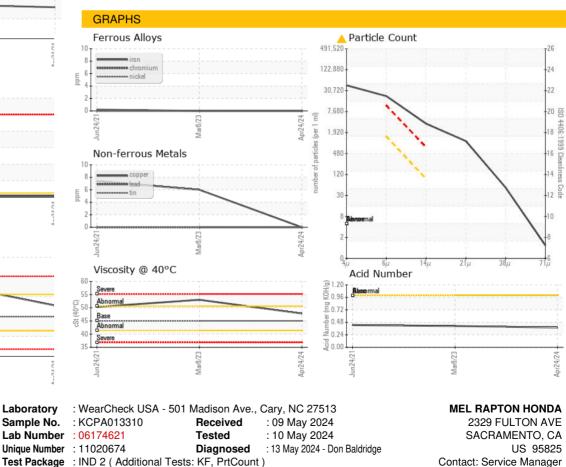

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Report Id: MELSAC [WUSCAR] 06174621 (Generated: 05/13/2024 13:53:46) Rev: 1

Certificate 12367

Contact/Location: Service Manager - MELSAC

aseruse@melraptonhonda.com

Т:

F: