




OIL ANALYSIS REPORT

Sample Rating Trend

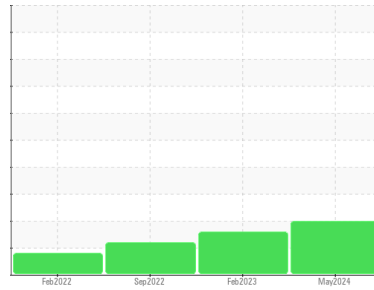

WATER



Machine Id
6694061 (S/N 1113)

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

High concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KCPA013298	KCP46220	KCP37373
Sample Date	Client Info			01 May 2024	15 Feb 2023	01 Sep 2022
Machine Age	hrs	Client Info		17479	16094	12874
Oil Age	hrs	Client Info		1500	3220	377
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	1	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	<1	2	5
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	32	3
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	100	49	65	51
Calcium	ppm	ASTM D5185m	0	<1	2	<1
Phosphorus	ppm	ASTM D5185m	0	0	1	0
Zinc	ppm	ASTM D5185m	0	7	8	12
Sulfur	ppm	ASTM D5185m	23500	21995	18935	22660

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	9	7
Sodium	ppm	ASTM D5185m		10	21	16
Potassium	ppm	ASTM D5185m	>20	2	3	3
Water	%	ASTM D6304	>0.05	▲ 0.146	0.018	0.013
ppm Water	ppm	ASTM D6304	>500	▲ 1460	187.4	136.5

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		---	11485	40349
Particles >6µm		ASTM D7647	>1300	---	▲ 3666	▲ 16803
Particles >14µm		ASTM D7647	>80	---	▲ 216	▲ 300
Particles >21µm		ASTM D7647	>20	---	▲ 55	24
Particles >38µm		ASTM D7647	>4	---	5	2
Particles >71µm		ASTM D7647	>3	---	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	---	▲ 21/19/15	▲ 23/21/15

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.36	0.32	0.32


OIL ANALYSIS REPORT

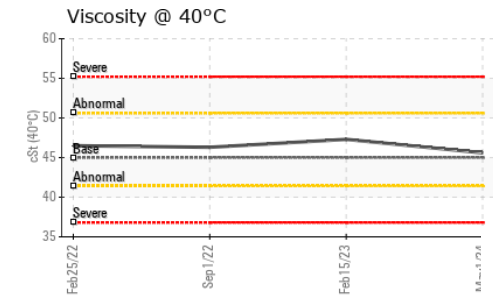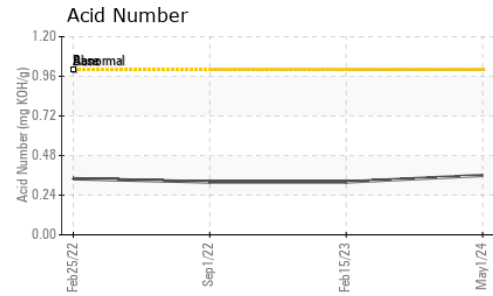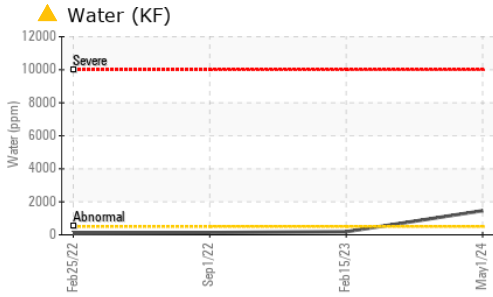





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ HEAVY	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	▲ 0.2%	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.6	47.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

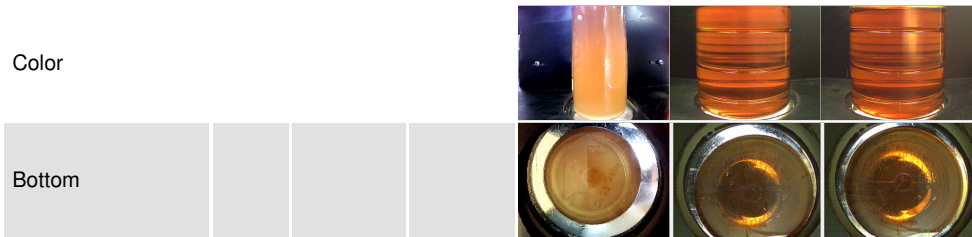

GRAPHS

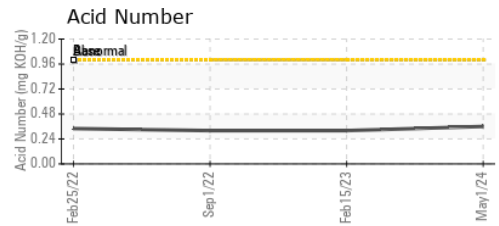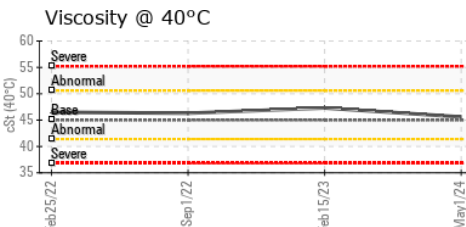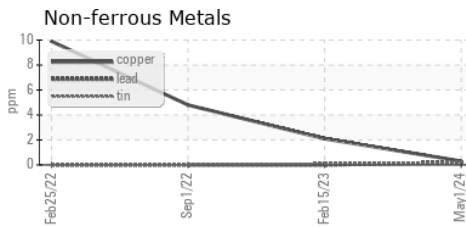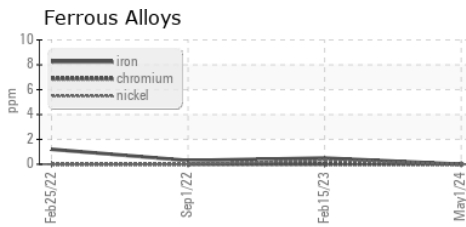

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA013298 **Received** : 09 May 2024
Lab Number : 06174625 **Tested** : 13 May 2024
Unique Number : 11020678 **Diagnosed** : 13 May 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

RIMNETICS INC
 10600 INDUSTRIAL AVE, SUITE 130
 ROSEVILLE, CA
 US 95678
 Contact: B. WINIS
 bwinis@rimnetics.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)