

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

9349482 (S/N 1012) Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012499		
Sample Date		Client Info		02 May 2024		
Machine Age	hrs	Client Info		1622		
Oil Age	hrs	Client Info		1622		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	0		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	64		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		3		
Sulfur	ppm	ASTM D5185m		21447		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		12		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.05	0.025		
ppm Water	ppm	ASTM D6304	>500	251		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		5796		
Particles >6µm		ASTM D7647	>1300	1279		
Particles >14µm		ASTM D7647	>80	70		
Particles >21µm		ASTM D7647	>20	18		
Particles >38µm		ASTM D7647	>4	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/17/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.44		



OIL ANALYSIS REPORT

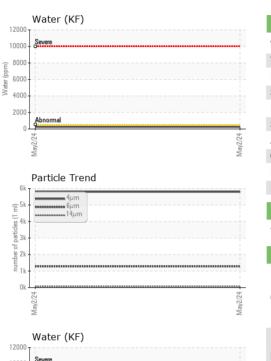

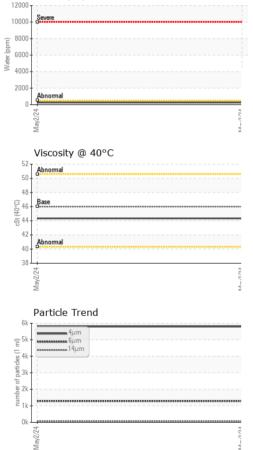

	VISUAL		method	limit/ba	ase	current	history1	history2		
	White Metal	scalar	*Visual	NONE	Ν	IONE				
	Yellow Metal	scalar	*Visual	NONE	N	ONE				
	Precipitate	scalar	*Visual	NONE	N	ONE				
	Silt	scalar	*Visual	NONE	N	IONE				
	Debris	scalar	*Visual	NONE	N	ONE				
	Sand/Dirt	scalar	*Visual	NONE	N	IONE				
May2/24	Appearance	scalar	*Visual	NORMI	_ N	ORML				
Ma	Odor	scalar	*Visual	NORMI	_ N	IORML				
	Emulsified Water	scalar	*Visual	>0.05	N	IEG				
	Free Water	scalar	*Visual		N	IEG				
	FLUID PROPER	TIES	method	limit/ba	ase	current	history1	history		
	Visc @ 40°C	cSt	ASTM D445	46	4	4.33				
	SAMPLE IMAGE	S	method	limit/ba	ase	current	history1	history		
May2/24	Color						no image	no image		
	Bottom						no image	no image		
	GRAPHS									
	Ferrous Alloys					rticle Count				
	10 iron			4	91,520					
۲	o - chromium			1	22,880					
C C					20.720					
14	2				30,720-					
	0				7,680	N. 1		-		
	May2/24			May2/24 number of particles (per 1 ml)	1,920	1				
	W			eM es (pe	1,020	1	N			
	Non-ferrous Meta	ls		partic	480-			-		
	10 copper			er of	120-					
				numh						
					30-					
8	2				8 Beres	mal	/			
C C - 1					en en					
4	May2/24			May2/24	2-					
				Ma	0411	6µ	14μ 21μ	38µ 71		
	Viscosity @ 40°C				Ac	id Number	- η. Δ ημ	30μ /1		
	55 Abnormal				^{€0.50}	R				
	50				0.40 - 0.40					
	0.00 00 173 Abnormal				E 0.30					
	40 Abnormal				0.50 (b)HOX 0.40 0.30 0.30 0.20 0.10 0.10					
	35				9 0.00 F					
×	May2/24			May2/24 -	auto .					
C C	May			May	May2/24					
	,							ROSEVILLE PRECISI 1180 TARA ROCKLIN, US 957 Contact: R. ROBINS rrobinson@gotorpi.c		

¢,

Contact/Location: R. ROBINSON - ROSROC