

### **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id

# 6065888 (S/N 1012)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	VATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012468	KCP35074	
Sample Date		Client Info		06 May 2024	27 Jan 2022	
Machine Age	hrs	Client Info		0	22949	
Dil Age	hrs	Client Info		0	2500	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	2	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m		4	8	
Tin	ppm	ASTM D5185m	>10		<1	
Antimony	ppm	ASTM D5185m	~10		4	
Vanadium		ASTM D5185m		0	4	
	ppm	ASTM D5185m				
Cadmium	ppm	MCQ1C0 INLEY		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	
Barium	ppm	ASTM D5185m	90	29	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	100	41	4	
Calcium	ppm	ASTM D5185m	0	<1	0	
Phosphorus	ppm	ASTM D5185m	0	0	14	
Zinc	ppm	ASTM D5185m	0	12	6	
Sulfur	ppm	ASTM D5185m	23500	20735	17199	
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon		ASTM D5185m		0	3	
	ppm		>20			
Sodium	ppm	ASTM D5185m	× 20	10 F	<1	
Potassium	ppm	ASTM D5185m		5	0	
Water	%	ASTM D6304		0.011	0.005	
opm Water	ppm	ASTM D6304	>500	117	53.0	
FLUID CLEANLIN	VESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		74752	23551	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u> </u>	
Particles >14µm		ASTM D7647	>80	<b>A</b> 1191	<b>5</b> 04	
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	
Particles >38µm		ASTM D7647	>4	<u> </u>	4	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 23/22/17	<b>2</b> 0/16	
FLUID DEGRADA	ATION	method	limit/base	current	historv1	history2
						niotory2
FLUID DEGRADA Acid Number (AN) 08:34) Rev: 1	ATION mg KOH/g	method ASTM D8045	limit/base 1.0	current <b>0.766</b> Contact/Locat	history1 0.37 tion: JOSH NEV	VIV


Report Id: IDTFRE [WUSCAR] 06174631 (Generated: 05/13/2024 14:08:34) Rev: 1

Contact/Location: JOSH NEWMAN - IDTFRE




Built for a lifetime.

## **OIL ANALYSIS REPORT**





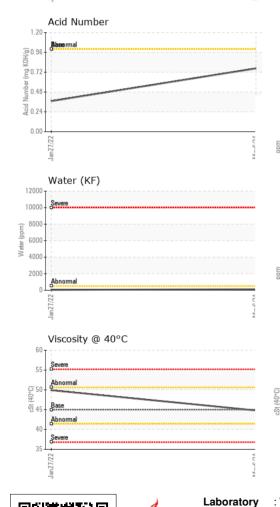

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual	20.00	NEG	NEG	
FLUID PROPERTI		method	limit/base	current	history1	history2
				44.8		Thistory 2
Visc @ 40°C	cSt	ASTM D445	45	-	49.9	
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				•		no image
Bottom						no image
GRAPHS						
Ferrous Alloys				Particle Coun	t	
iron i			491,52	<sup>0</sup> T		1 <sup>26</sup>
chromium			122,88	0		-24
6 - nickel						
			30,72			-22
			7,68	0-		-20 -
Jan 27/22			May6/24 . (per 1 ml)		$\backslash$	+18 0 1993 +18 0 1993 +16 0 0000 +14 0000 +14 0000 +14 0000
Jan			w adj sa	· ·	1	10 0
Non-ferrous Metals	5		pitred 48	0-		16 2
copper			May6/24 1826 (per 1 ml)	0+		+14 8
tin					· \	5
			3	0-	```	-12 ā
				<sup>8</sup> <b>Sever</b> emal		10
			4	2		
Jan 27/22			ay6/			
-			≥	0 4μ 6μ	14µ 21µ	38µ 71µ
Viscosity @ 40°C				Acid Number		
Severe			(B)HOU WHO WHO WI WI WI WI WI WI WI WI WI WI WI WI WI	Basermal		
Abnormal			20.9 20.7	2		
Base				8		
Abnormal Severe			P 0.2	4		
Severe			0.0	0		
Jan 27/22			May6/24	Jan 27/22		May6/24
VearCheck USA - 501 CPA012468 6174631 1020684	Madiso Recei Teste Diagr	<b>ved</b> : 09 <b>d</b> : 13	, NC 27513 May 2024 May 2024 May 2024 - Doi			ECHNOLOGY H POINTE DR FRESNO, CA US 93725
ID 2 ( Additional Test	•			v	Contact: IC	SH NEWMAN

- To discuss this sample report, contact Customer Service at 1-800-237-1369.
- \* Denotes test methods that are outside of the ISO 17025 scope of accreditation.
- Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: IDTFRE [WUSCAR] 06174631 (Generated: 05/13/2024 14:08:35) Rev: 1

Certificate L2367

Sample No.

Lab Number **Unique Number Test Package**  :

Contact/Location: JOSH NEWMAN - IDTFRE

joshnewman@promachbuilt.com

T:

F: