




# OIL ANALYSIS REPORT



Area  
**KANSAS/44/EG - OTHER SERVICE**  
 Machine Id  
**63.03 [KANSAS^44^EG - OTHER SERVICE]**  
 Component  
**Front Differential**  
 Fluid  
**MOBIL 50W (--- GAL)**

## Sample Rating Trend

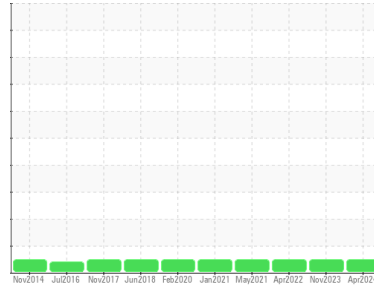

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0914441</b>	WC0862701	WC0639979
Sample Date	Client Info		<b>29 Apr 2024</b>	16 Nov 2023	25 Apr 2022
Machine Age	hrs	Client Info	<b>15550</b>	13432	12643
Oil Age	hrs	Client Info	<b>1000</b>	789	10998
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	<b>21</b>	13	13
Chromium	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	1	2
Lead	ppm	ASTM D5185m	>13	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>103	<b>9</b>	6	5
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>7</b>	6	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>2</b>	4	4
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>23</b>	22	26
Calcium	ppm	ASTM D5185m		<b>3141</b>	3016	3257
Phosphorus	ppm	ASTM D5185m		<b>1099</b>	1058	1053
Zinc	ppm	ASTM D5185m		<b>1287</b>	1224	1279
Sulfur	ppm	ASTM D5185m		<b>13838</b>	11694	10901

### CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>100	<b>6</b>	6	5
Sodium	ppm	ASTM D5185m		<b>2</b>	2	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0

### VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



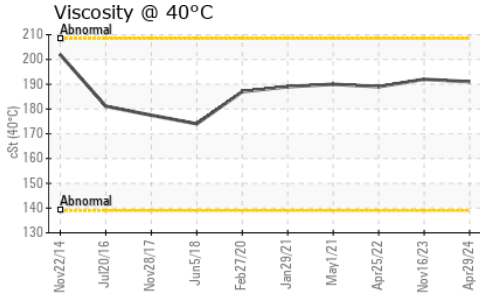


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>191</b>	192	189

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

## GRAPHS

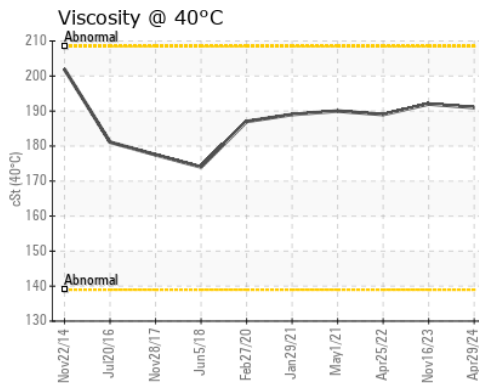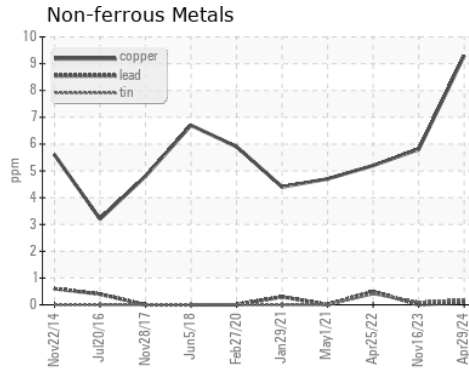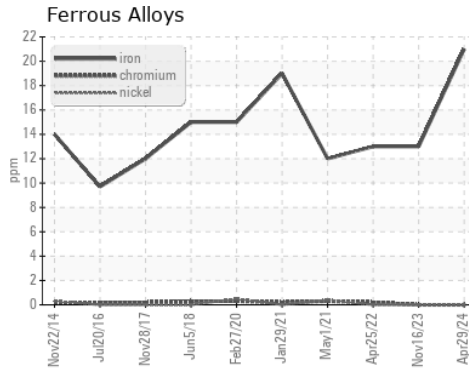

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0914441  
**Lab Number** : 06174773  
**Unique Number** : 11020826  
**Test Package** : CONST

**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 10 May 2024 - Wes Davis

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)