

OIL ANALYSIS REPORT

Sample Rating Trend **WEAR**

Machine Id 2412 Component

Diesel Engine

ROYAL PURPLE MOTOR OIL 15W40 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

TS)				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0720068		
Sample Date		Client Info		25 Apr 2024		
Machine Age	mls	Client Info		75044		
Oil Age	mls	Client Info		50000		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
CONTAMINATION	V	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	52		
Chromium	ppm	ASTM D5185m	>20	4		
Nickel	ppm	ASTM D5185m	>4	3		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	30		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	<u>437</u>		
Tin	ppm	ASTM D5185m	>15	5		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	100	8		
Manganese	ppm	ASTM D5185m		2		
Magnesium	ppm	ASTM D5185m	60	95		
Calcium	ppm	ASTM D5185m	3050	2479		
Phosphorus	ppm	ASTM D5185m	1050	956		
Zinc	ppm	ASTM D5185m	1200 12500	1120		
Sulfur	ppm	ASTM D5185m		2954	to Control of	la la tara o
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8		
Sodium	ppm	ASTM D5185m	00	2		
Potassium	ppm	ASTM D5185m	>20	68		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7		
Nitration	Abs/cm	*ASTM D7624	>20	10.2		
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.5		
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	5.8		



OIL ANALYSIS REPORT

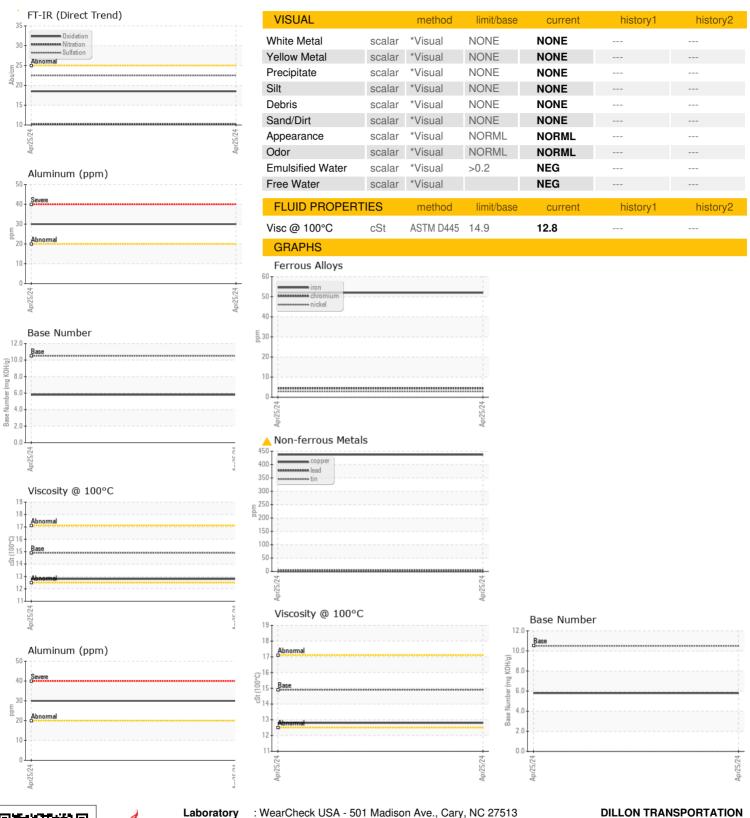



Certificate 12367

Laboratory Sample No. : WC0720068 Lab Number : 06174836 Unique Number : 11020889

Tested Test Package : FLEET

Received : 09 May 2024 : 10 May 2024 Diagnosed

: 13 May 2024 - Sean Felton

DILLON TRANSPORTATION 974 TN WALTZ PARKWAY ASHLAND CITY, TN

US 37015

Contact: MASON NICHOLSON M.NICHOLSON@DILLONTRANSPORTATION.COM

T: (615)792-5099

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (615)469-4200 Contact/Location: MASON NICHOLSON - DILASH