




# OIL ANALYSIS REPORT

Sample Rating Trend

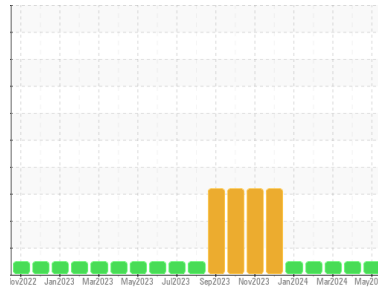

**NORMAL**



Area  
**ARIZONA GROUPING**  
 Machine Id  
**8477**  
 Component  
**Diesel Engine**  
 Fluid  
**NAPA Motor Oil 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0935448</b>	WC0899587	WC0899592
Sample Date	Client Info			<b>04 May 2024</b>	08 Apr 2024	01 Mar 2024
Machine Age	hrs	Client Info		<b>2158</b>	2077	1910
Oil Age	hrs	Client Info		<b>450</b>	369	202
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>46</b>	37	29
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	3	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>9</b>	1	4
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>63</b>	61	81
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>8</b>	6	10
Manganese	ppm	ASTM D5185m		<b>1</b>	1	1
Magnesium	ppm	ASTM D5185m		<b>691</b>	734	678
Calcium	ppm	ASTM D5185m		<b>1334</b>	1349	1359
Phosphorus	ppm	ASTM D5185m		<b>761</b>	732	634
Zinc	ppm	ASTM D5185m		<b>839</b>	840	769
Sulfur	ppm	ASTM D5185m		<b>3063</b>	3455	2699




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>9</b>	8	7
Sodium	ppm	ASTM D5185m		<b>3</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	4	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.7	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.4</b>	10.3	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	20.9	19.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.1</b>	17.2	15.5
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.4</b>	6.8	7.4







# OIL ANALYSIS REPORT

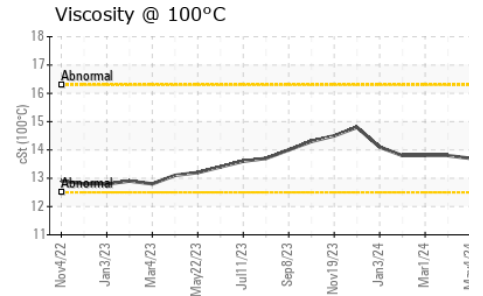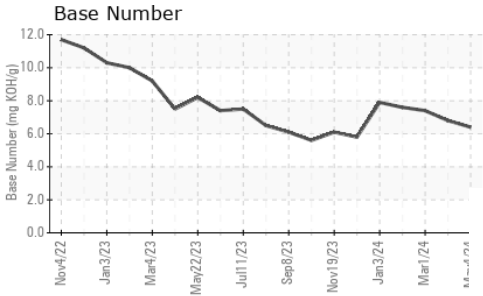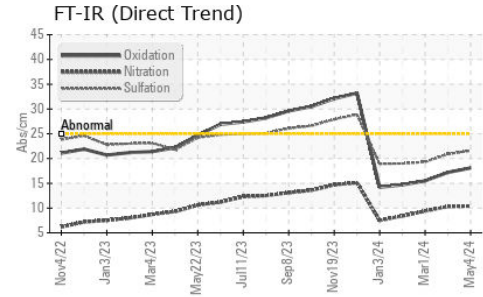

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.7	13.8	13.8

## GRAPHS

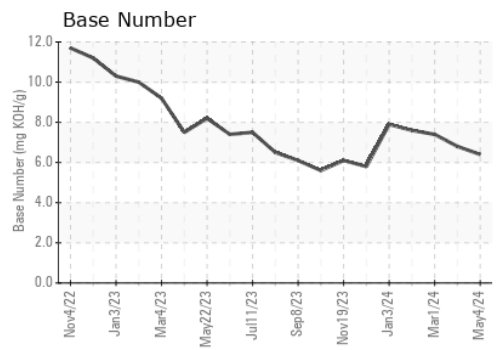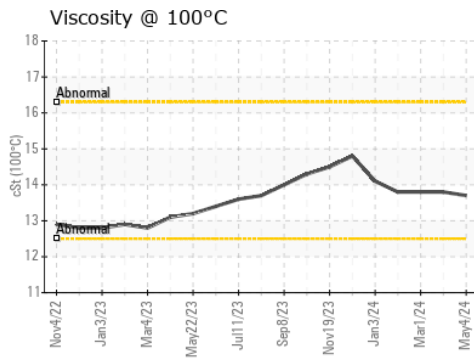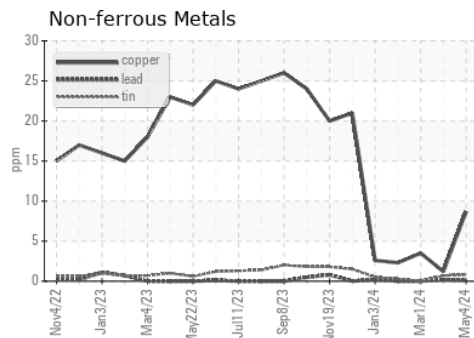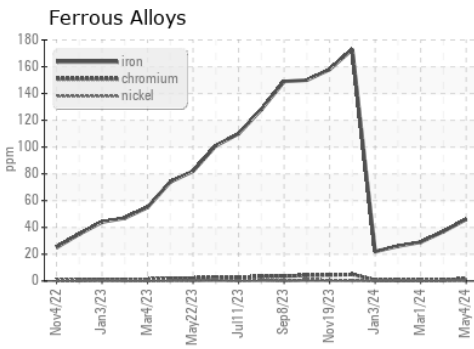

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935448 **Received** : 09 May 2024  
**Lab Number** : 06174885 **Tested** : 10 May 2024  
**Unique Number** : 11020938 **Diagnosed** : 10 May 2024 - Wes Davis  
**Test Package** : FLEET

**LIBERTY DISPOSAL**  
 6401 S EASTERN AVE  
 OKLAHOMA CITY, OK  
 US 73149  
 Contact: CATHY ROSA  
 c.rosa@ldi89.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)