




# OIL ANALYSIS REPORT

Sample Rating Trend

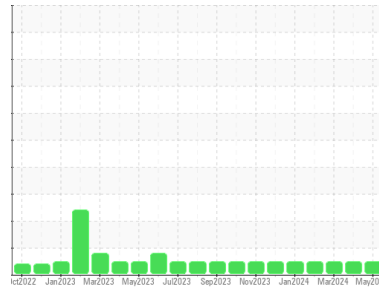

**NORMAL**



Area  
**ARIZONA**  
Machine Id  
**VOLVO 4886**  
Component  
**Diesel Engine**  
Fluid  
**NAPA Motor Oil 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0935444</b>	WC0899588	WC0899579
Sample Date	Client Info		<b>04 May 2024</b>	10 Apr 2024	02 Mar 2024
Machine Age	hrs	Client Info	<b>2924</b>	2744	2475
Oil Age	hrs	Client Info	<b>2354</b>	2174	1905
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>83</b>	73	60
Chromium	ppm	ASTM D5185m >20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>8</b>	8	6
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m >25	<b>5</b>	5	4
Lead	ppm	ASTM D5185m >40	<b>5</b>	5	2
Copper	ppm	ASTM D5185m >330	<b>100</b>	97	101
Tin	ppm	ASTM D5185m >15	<b>4</b>	4	3
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>22</b>	18	15
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>22</b>	22	22
Manganese	ppm	ASTM D5185m	<b>2</b>	2	2
Magnesium	ppm	ASTM D5185m	<b>438</b>	438	412
Calcium	ppm	ASTM D5185m	<b>1786</b>	1811	1735
Phosphorus	ppm	ASTM D5185m	<b>936</b>	919	870
Zinc	ppm	ASTM D5185m	<b>1104</b>	1144	1063
Sulfur	ppm	ASTM D5185m	<b>2907</b>	3238	2470

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	8	7
Sodium	ppm	ASTM D5185m	<b>4</b>	4	0
Potassium	ppm	ASTM D5185m >20	<b>15</b>	13	8

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.7	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.0</b>	11.1	10.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.4</b>	24.7	23.8


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.6</b>	21.8	20.8
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.0</b>	4.7	4.9




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

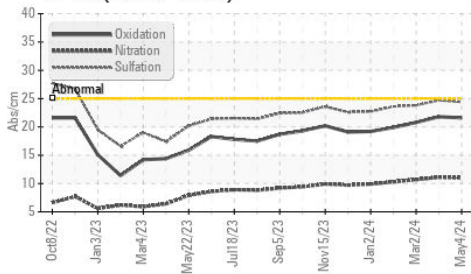

Base Number

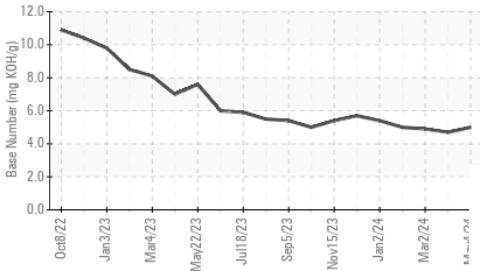

Viscosity @ 100°C

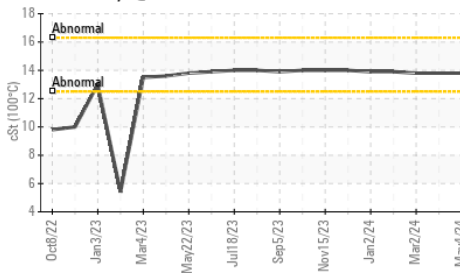


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.8	13.8	13.8

## GRAPHS


Ferrous Alloys

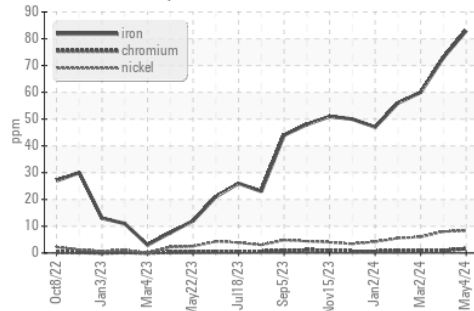


Non-ferrous Metals

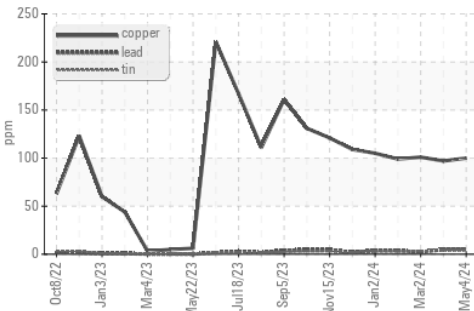

Viscosity @ 100°C

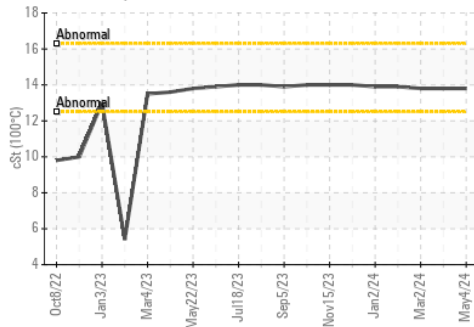

Base Number

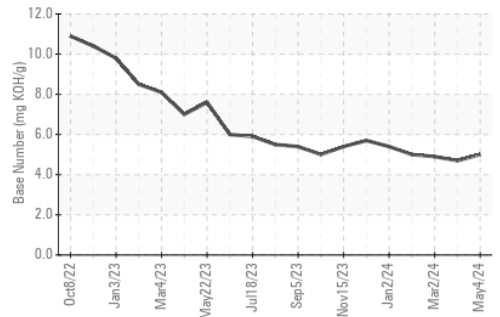

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935444  
**Lab Number** : 06174897  
**Unique Number** : 11020950  
**Test Package** : FLEET  
**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 13 May 2024 - Angela Borella

**LIBERTY DISPOSAL**  
 6401 S EASTERN AVE  
 OKLAHOMA CITY, OK  
 US 73149  
 Contact: CATHY ROSA  
 c.rosa@ldi89.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)