




OIL ANALYSIS REPORT

Sample Rating Trend

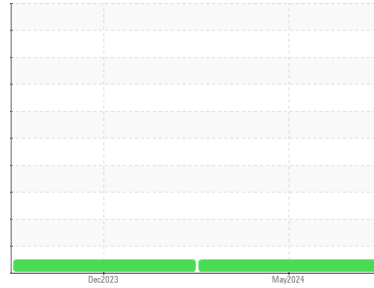

NORMAL



Machine Id

FORD 30147

Component

Gasoline Engine

Fluid

KENDALL GT-1 FULL SYNTHETIC MOTOR SAE 5W20 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0867769	WC0867824	---
Sample Date	Client Info		01 May 2024	18 Dec 2023	---
Machine Age	mls	Client Info	185437	180272	---
Oil Age	mls	Client Info	5162	5872	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>150	19	15	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	<1	---
Titanium	ppm	ASTM D5185m		2	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>40	5	4	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>155	1	2	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		29	20	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		80	93	---
Manganese	ppm	ASTM D5185m		3	2	---
Magnesium	ppm	ASTM D5185m		520	505	---
Calcium	ppm	ASTM D5185m		1004	1040	---
Phosphorus	ppm	ASTM D5185m	770	751	736	---
Zinc	ppm	ASTM D5185m	850	799	798	---
Sulfur	ppm	ASTM D5185m		3027	2778	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	15	14	---
Sodium	ppm	ASTM D5185m	>400	3	6	---
Potassium	ppm	ASTM D5185m	>20	2	0	---

INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		0	0	---
Nitration	Abs/cm	*ASTM D7624	>20	11.6	12.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.2	26.8	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.5	19.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.6	2.7	2.8	---







OIL ANALYSIS REPORT

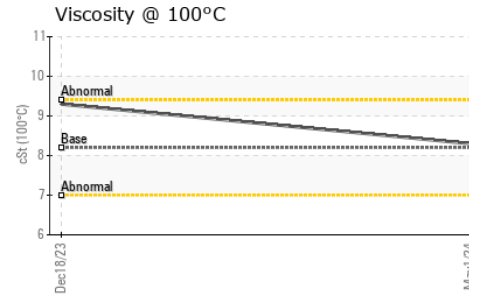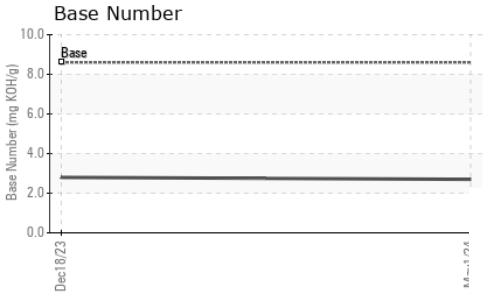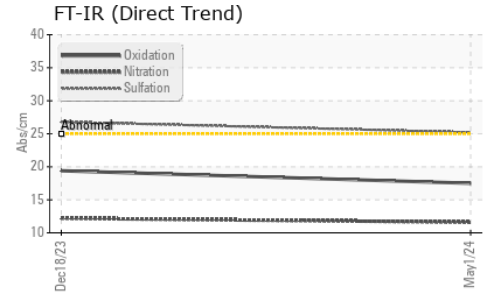

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	8.2	8.3	9.3	---

GRAPHS

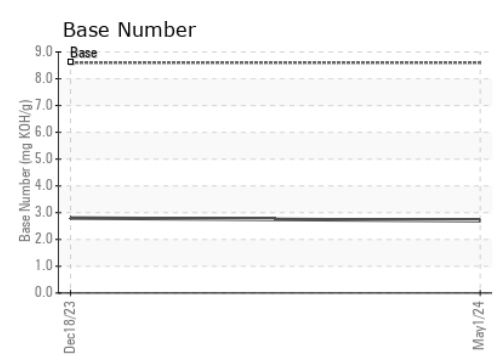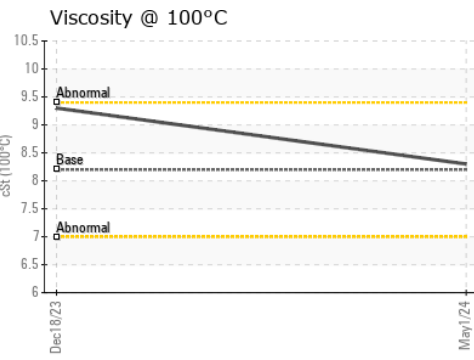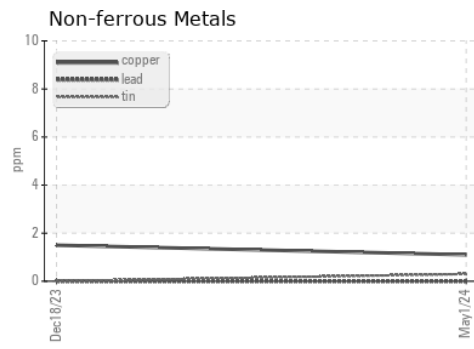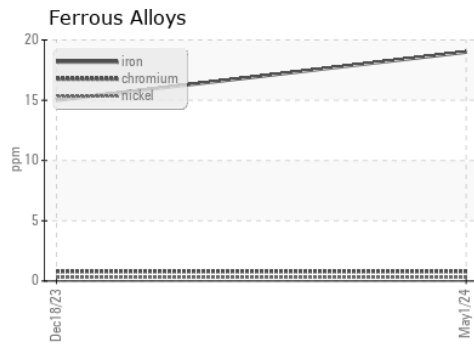

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0867769
Lab Number : **06174906**
Unique Number : 11020959
Test Package : FLEET
Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

GREENEVILLE OIL & PETROLEUM INC
 860 WEST ANDREW JOHNSON HWY
 GREENEVILLE, TN
 US 37745
 Contact: SHOP
 shop@burkharterenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)