




# OIL ANALYSIS REPORT

Sample Rating Trend

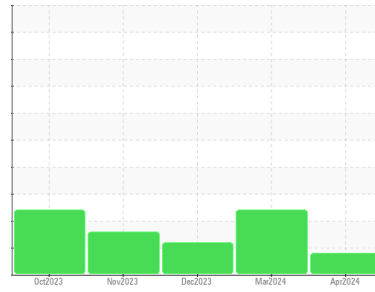

FUEL



Machine Id

## WESTERN STAR WESTERN STAR

Component

Diesel Engine

Fluid

MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0838237</b>	WC0838236	WC0838292
Sample Date	Client Info		<b>29 Apr 2024</b>	23 Mar 2024	17 Dec 2023
Machine Age	mls	Client Info	<b>793419</b>	785226	776363
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>MARGINAL</b>	SEVERE	ABNORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>4</b>	12	25
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>2</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	4	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	0	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>115</b>	81	78
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	9
Molybdenum	ppm	ASTM D5185m	0	<b>60</b>	115	126
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0	<b>518</b>	625	641
Calcium	ppm	ASTM D5185m		<b>1525</b>	1122	1228
Phosphorus	ppm	ASTM D5185m		<b>819</b>	685	764
Zinc	ppm	ASTM D5185m		<b>913</b>	772	821
Sulfur	ppm	ASTM D5185m		<b>2894</b>	3341	3208

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	9	14
Sodium	ppm	ASTM D5185m		<b>2</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	3
Fuel	%	ASTM D3524	>5	<b>▲ 2.6</b>	▲ 11.4	▲ 6.5

### INFRA-RED





	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.9	1.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.6</b>	9.3	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	18.4	19.9

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.2</b>	14.5	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>9.4</b>	6.1	6.7







# OIL ANALYSIS REPORT

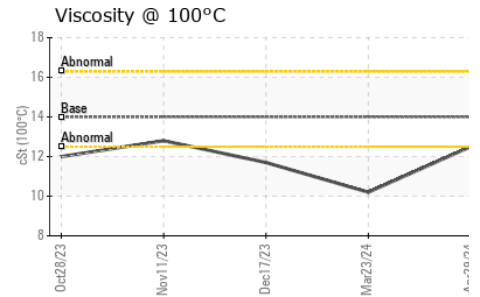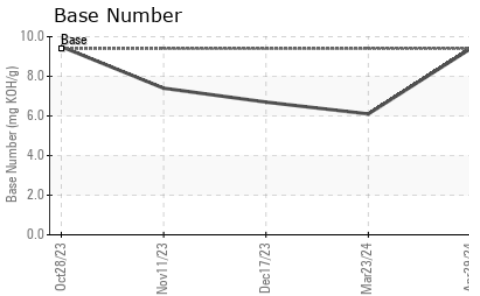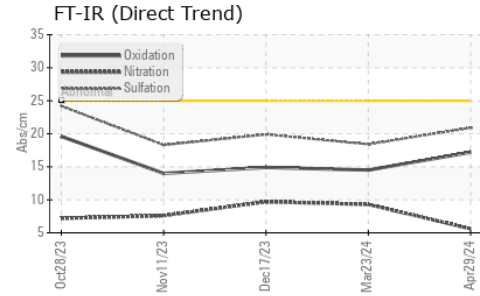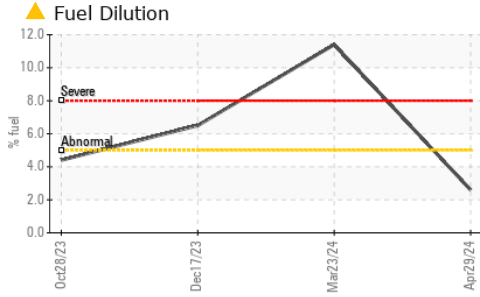

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	12.5	▲ 10.2	▲ 11.7

## GRAPHS

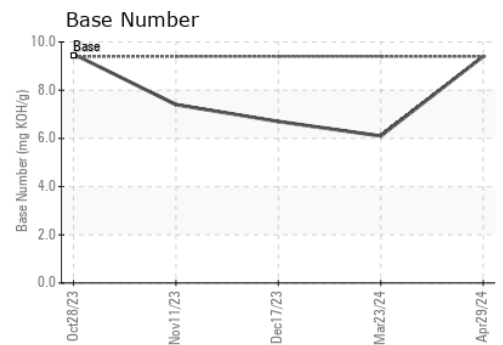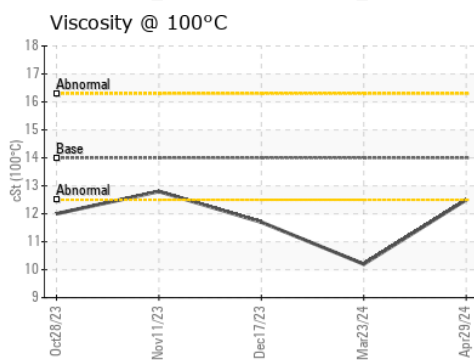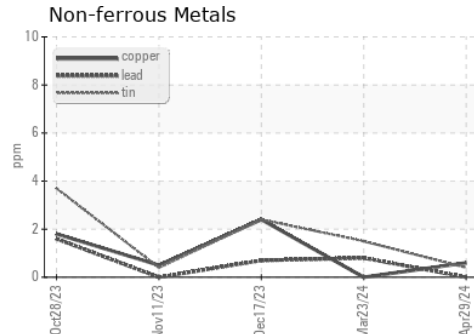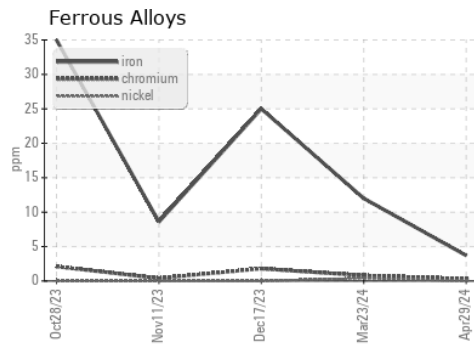

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0838237 **Received** : 09 May 2024  
**Lab Number** : 06174909 **Tested** : 15 May 2024  
**Unique Number** : 11020962 **Diagnosed** : 15 May 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**SHORTCUT TRUCKING LLC**  
 192 CASTLEWOOD ESTATES RD  
 QUITMAN, LA  
 US 71268  
 Contact: Marlin Treadway  
 shortcuttruckingla@gmail.com  
 T: (318)245-4221  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)