

OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id 4581 Diesel Engine

CITGO CITGUARD 600 15W40 (--- GAL)

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

				May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0901419		
Sample Date		Client Info		07 May 2024		
Machine Age	mls	Client Info		290928		
Oil Age	mls	Client Info		12758		
Oil Changed	11110	Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATION	٧	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	9		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	3		
Lead	ppm	ASTM D5185m	>40	<1		
Copper	ppm	ASTM D5185m	>330	<1		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	13	1		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m	57	59		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	825	431		
Calcium	ppm	ASTM D5185m	1100	1891		
Phosphorus	ppm	ASTM D5185m	933	1114		
Zinc	ppm	ASTM D5185m		1310		
Sulfur	ppm	ASTM D5185m		3869		
CONTAMINANTS		method	limit/base		history1	history2
Silicon	ppm	ASTM D5185m	>25	4		
Sodium	ppm	ASTM D5185m	> 20	<1		
Potassium	ppm	ASTM D5185m	>20	2	la la tament	
INFRA-RED	0/	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3		
Nitration	Abs/cm	*ASTM D7624		7.9		
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2		
FLUID DEGRADA		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4		
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	8.3		




OIL ANALYSIS REPORT

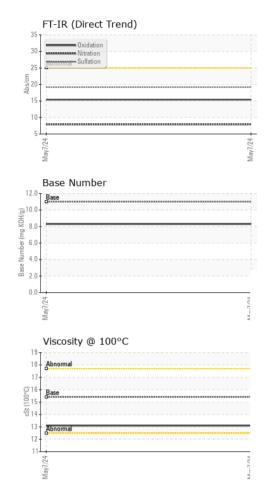


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID DDODEDI					111	1111


I LOID I NOI LITTILS			memou			HISTOLAL	HISTOLYZ	
	Visc @ 100°C	cSt	ASTM D445	15.4	13.1			

GRAPHS



10	
8	copper seesseesee lead
6 -	
음 4·	
2	
0	May7/24
	May7)24



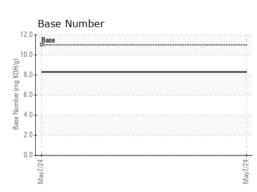





Certificate 12367

Laboratory **Sample No.** : WC0901419 Lab Number : 06175153 Unique Number : 11021206

Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received : 10 May 2024 Tested : 13 May 2024

Diagnosed : 13 May 2024 - Wes Davis

OMNISOURCE SE 1426 WEST MAIN SHOP KERNERSVILLE, NC US 27284

Contact: JEFF HENDRIX

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: