




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/102**  
 Machine Id  
**20.523L [OKLAHOMA^102]**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (43 GAL)**

### Sample Rating Trend

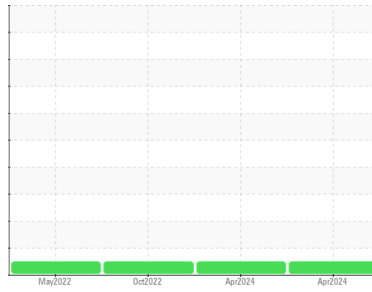

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0914417</b>	WC0873879	WC0746360
Sample Date	Client Info			<b>25 Apr 2024</b>	18 Apr 2024	27 Oct 2022
Machine Age	hrs	Client Info		<b>4249</b>	4209	2313
Oil Age	hrs	Client Info		<b>1936</b>	1896	2313
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>10</b>	10	9
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	2	1
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>75	<b>5</b>	5	5
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>29</b>	28	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>16</b>	16	10
Calcium	ppm	ASTM D5185m		<b>2395</b>	2393	1219
Phosphorus	ppm	ASTM D5185m		<b>1019</b>	965	764
Zinc	ppm	ASTM D5185m		<b>1170</b>	1132	1012
Sulfur	ppm	ASTM D5185m		<b>4289</b>	3872	3135

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>7</b>	7	4
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>2180</b>	3481	2186
Particles >6µm		ASTM D7647	>2500	<b>69</b>	109	92
Particles >14µm		ASTM D7647	>640	<b>7</b>	11	7
Particles >21µm		ASTM D7647	>160	<b>2</b>	2	1
Particles >38µm		ASTM D7647	>40	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/18/16	<b>18/13/10</b>	19/14/11	18/14/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.98</b>	0.99	0.90


# OIL ANALYSIS REPORT

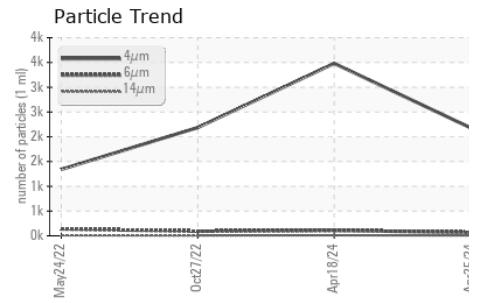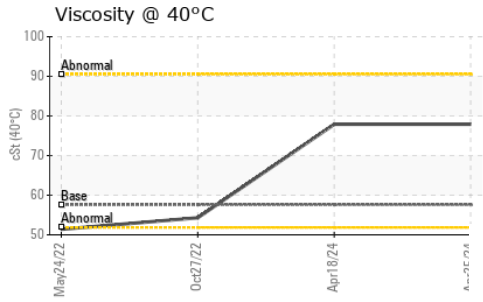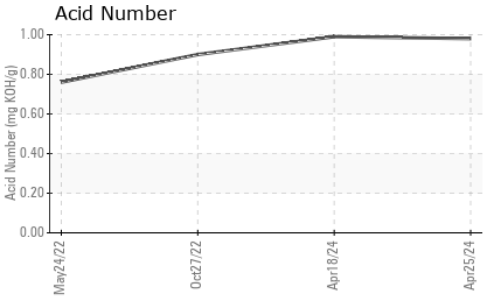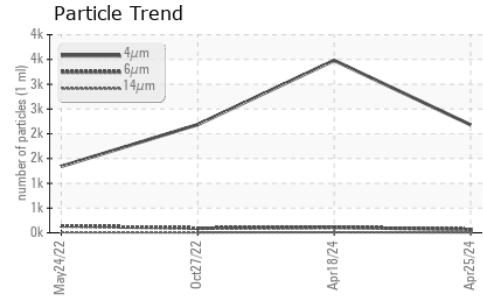






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	57.6	77.9	77.9	54.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

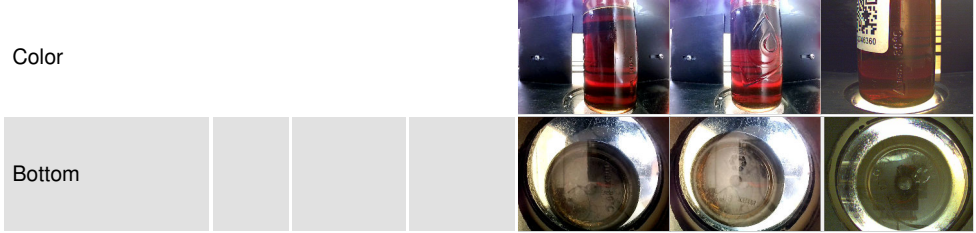

## GRAPHS

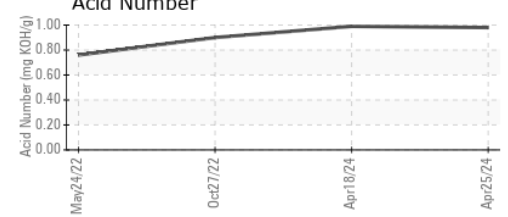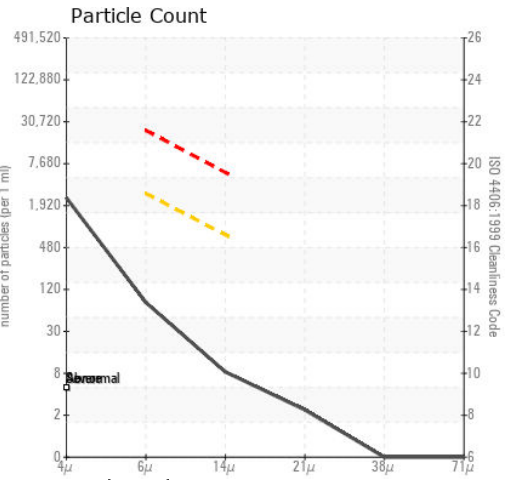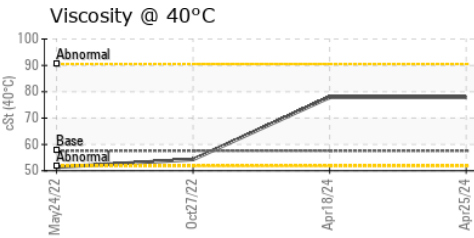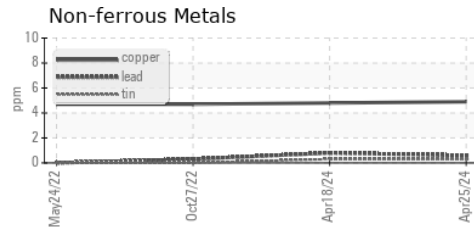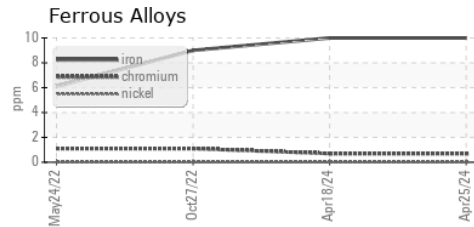

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0914417      **Received** : 10 May 2024  
**Lab Number** : 06175394      **Tested** : 13 May 2024  
**Unique Number** : 11021447      **Diagnosed** : 13 May 2024 - Wes Davis  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 Doug.King@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)