


OIL ANALYSIS REPORT

Sample Rating Trend



SEDIMENT

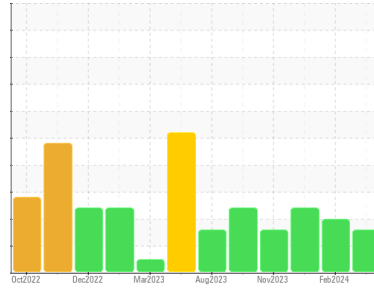

Area
Paper Cup Machines
 Machine Id
PMC 1003 POS-216 (S/N 159158)
 Component
Circulating System
 Fluid
SUMMIT Syngear SH-1032 320 (85 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of visible silt present in the sample.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO50002252	TO50001526	TO50002016
Sample Date	Client Info			06 May 2024	14 Feb 2024	29 Jan 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	Filtered	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		49	16	18
Iron	ppm	ASTM D5185m		29	8	3
Chromium	ppm	ASTM D5185m		<1	0	0
Nickel	ppm	ASTM D5185m		4	3	3
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		2	<1	0
Lead	ppm	ASTM D5185m		<1	0	1
Copper	ppm	ASTM D5185m		2	<1	<1
Tin	ppm	ASTM D5185m		<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		14	6	8
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		2	0	0
Phosphorus	ppm	ASTM D5185m		249	170	153
Zinc	ppm	ASTM D5185m		2	0	0
Sulfur	ppm	ASTM D5185m		3032	1857	1613

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		3272	1217	1267
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304		0.009	0.004	0.007
ppm Water	ppm	ASTM D6304		91	43	76

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	---	▲ 51797	▲ 13676
Particles >6µm		ASTM D7647	>320	---	▲ 5610	▲ 3206
Particles >14µm		ASTM D7647	>80	---	▲ 121	▲ 101
Particles >21µm		ASTM D7647	>20	---	▲ 33	16
Particles >38µm		ASTM D7647	>4	---	4	0
Particles >71µm		ASTM D7647	>3	---	1	0
Oil Cleanliness		ISO 4406 (c)	>17/15/13	---	▲ 23/20/14	▲ 21/19/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.51	0.42	0.44


OIL ANALYSIS REPORT

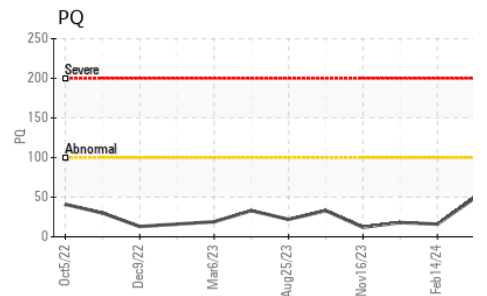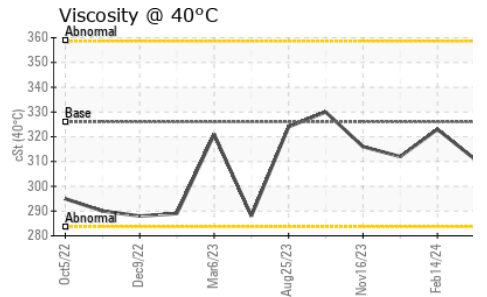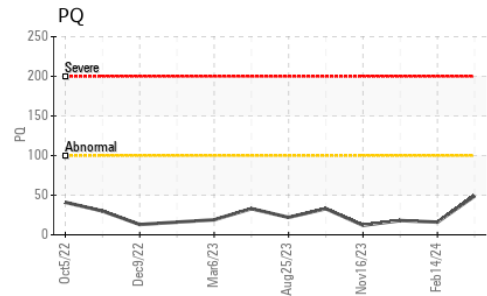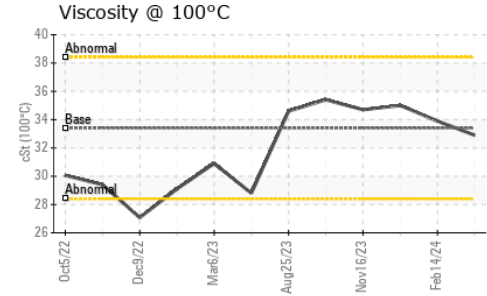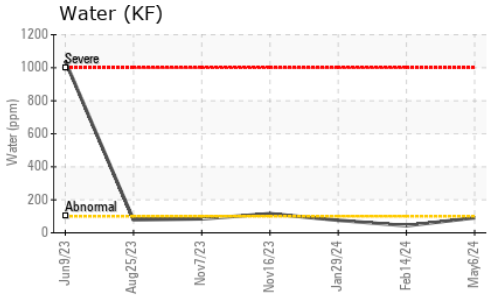





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	▲ MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	● HAZY	NORML	● MILKY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	326	311	323
Visc @ 100°C	cSt	ASTM D445	33.4	32.9	33.9
Viscosity Index (VI)	Scale	ASTM D2270	145	147	157

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

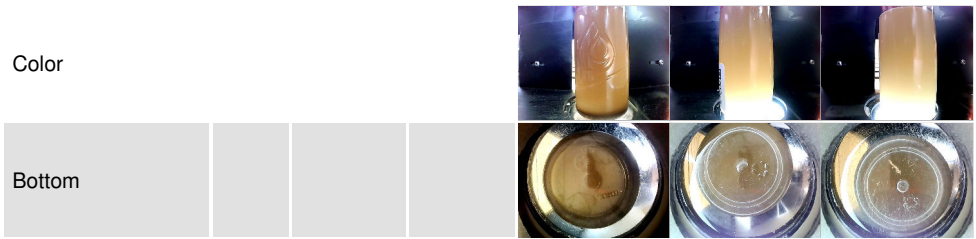

GRAPHS

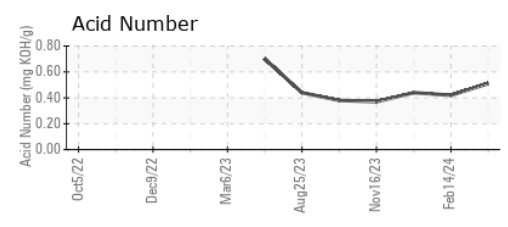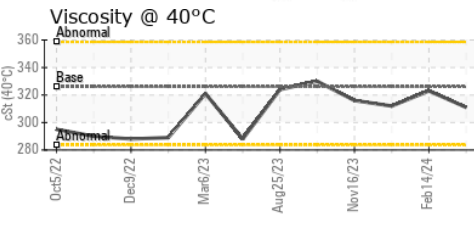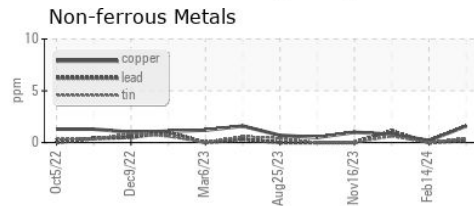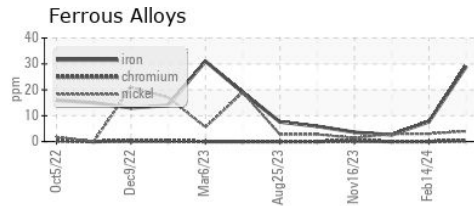

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50002252 **Received** : 10 May 2024
Lab Number : 06175456 **Tested** : 14 May 2024
Unique Number : 11021509 **Diagnosed** : 14 May 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, PrtCount, VI)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)