


# OIL ANALYSIS REPORT

Sample Rating Trend



## CONTAMINANT

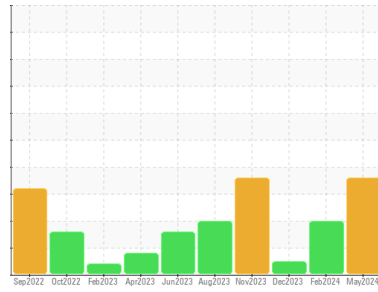

Area  
**Paper Cup Machines**  
 Machine Id  
**PMC 1003 POS-168 (S/N 189461)**  
 Component  
**Circulating System**  
 Fluid  
**SUMMIT Syngear SH-1032 320 (85 GAL)**

### DIAGNOSIS

**Recommendation**  
 We recommend you service the filters on this component. Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 Appearance is hazy. There is a high amount of particulates present in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO50002250</b>	TO50001915	TO50001985
Sample Date	Client Info		<b>06 May 2024</b>	13 Feb 2024	29 Dec 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Filtered
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>173</b>	24	21
Iron	ppm	ASTM D5185m	<b>17</b>	11	12
Chromium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	<b>6</b>	<1	5
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	<b>2</b>	1	1
Lead	ppm	ASTM D5185m	<b>&lt;1</b>	2	<1
Copper	ppm	ASTM D5185m	<b>2</b>	2	2
Tin	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1






ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>52</b>	50	49
Barium	ppm	ASTM D5185m	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	3	2
Calcium	ppm	ASTM D5185m	<b>4</b>	5	4
Phosphorus	ppm	ASTM D5185m	<b>404</b>	464	449
Zinc	ppm	ASTM D5185m	<b>4</b>	3	0
Sulfur	ppm	ASTM D5185m	<b>5658</b>	6359	6678

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<b>4912</b>	3995	3847
Sodium	ppm	ASTM D5185m	<b>0</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	4	<1
Water	%	ASTM D6304	<b>0.014</b>	0.008	0.009
ppm Water	ppm	ASTM D6304	<b>141</b>	82	99

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	<b>▲ 18687</b>	▲ 65189	---
Particles >6µm	ASTM D7647	>320	<b>▲ 10180</b>	▲ 12430	---
Particles >14µm	ASTM D7647	>80	<b>▲ 1732</b>	▲ 615	---
Particles >21µm	ASTM D7647	>20	<b>▲ 584</b>	▲ 106	---
Particles >38µm	ASTM D7647	>4	<b>▲ 90</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>▲ 9</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>17/15/13	<b>▲ 21/21/18</b>	▲ 23/21/16	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.68</b>	0.60	0.59


# OIL ANALYSIS REPORT

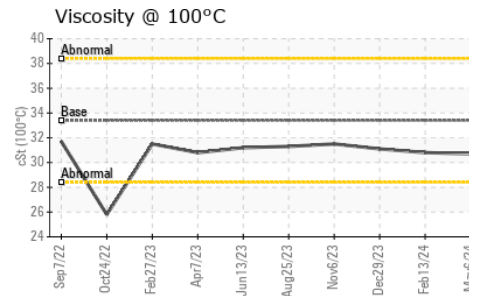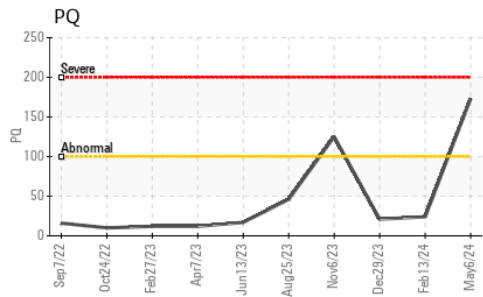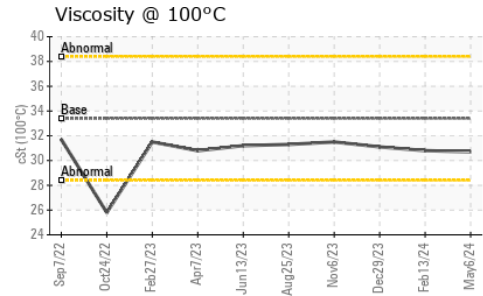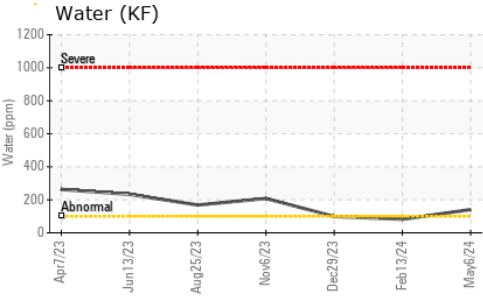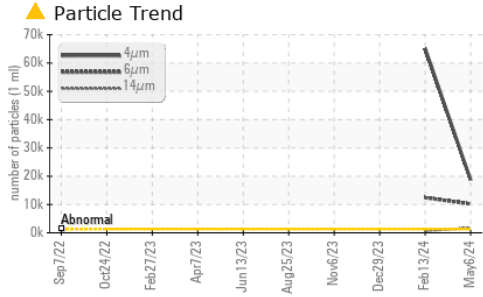






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	LIGHT
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>HAZY</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	326	<b>302</b>	304
Visc @ 100°C	cSt	ASTM D445	33.4	<b>30.7</b>	30.8
Viscosity Index (VI)	Scale	ASTM D2270	145	<b>139</b>	139

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

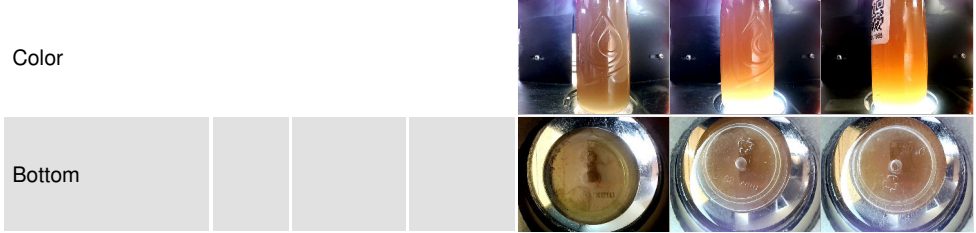

## GRAPHS

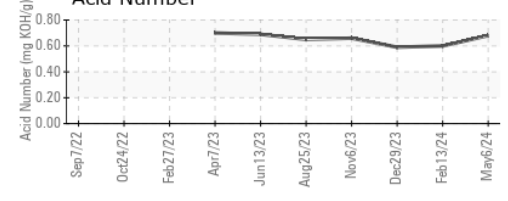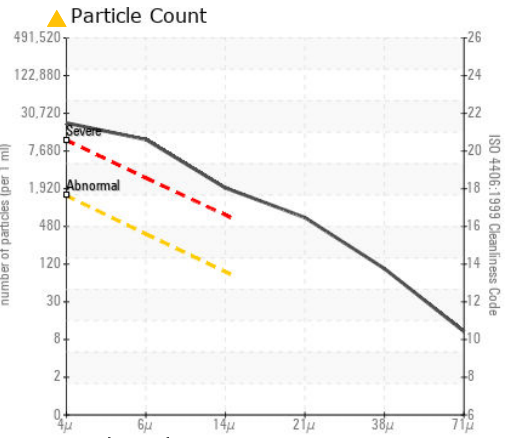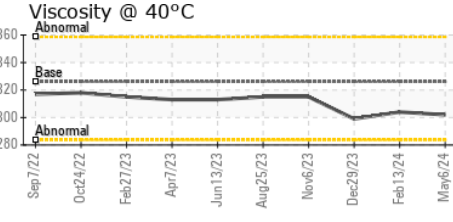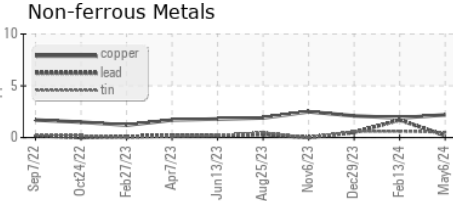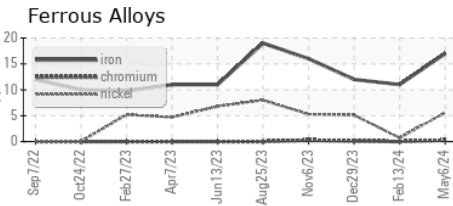

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO50002250  
**Lab Number** : 06175457  
**Unique Number** : 11021510  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PQ, PrtCount, VI )  
**Received** : 10 May 2024  
**Tested** : 18 May 2024  
**Diagnosed** : 18 May 2024 - Jonathan Hester

**DART CONTAINER CORPORATION**  
 4444 W LEADBETTER DR  
 DALLAS, TX  
 US 75236  
 Contact: YON PALOMINO  
 yon.palomino@dart.biz  
 T: (214)775-5673  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)