

### **OIL ANALYSIS REPORT**



Machine Id

# 8515729 (S/N 1742) Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.

#### Wear

All component wear rates are normal.

#### Contamination

Appearance is hazy. There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM    | IATION   | method       | limit/base | current        | history1 | history2 |
|------------------|----------|--------------|------------|----------------|----------|----------|
| Sample Number    |          | Client Info  |            | KCPA012515     |          |          |
| Sample Date      |          | Client Info  |            | 18 Apr 2024    |          |          |
| Machine Age      | hrs      | Client Info  |            | 1458           |          |          |
| Oil Age          | hrs      | Client Info  |            | 3000           |          |          |
| Oil Changed      |          | Client Info  |            | Changed        |          |          |
| Sample Status    |          |              |            | ABNORMAL       |          |          |
| WEAR METALS      |          | method       | limit/base | current        | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >50        | 2              |          |          |
| Chromium         | ppm      | ASTM D5185m  | >10        | <1             |          |          |
| Nickel           | ppm      | ASTM D5185m  | >3         | 0              |          |          |
| Titanium         | ppm      | ASTM D5185m  | >3         | <1             |          |          |
| Silver           | ppm      | ASTM D5185m  | >2         | 0              |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >10        | 2              |          |          |
| Lead             | ppm      | ASTM D5185m  | >10        | 0              |          |          |
| Copper           | ppm      | ASTM D5185m  | >50        | 9              |          |          |
| Tin              | ppm      | ASTM D5185m  | >10        | <1             |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | <1             |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0              |          |          |
| ADDITIVES        |          | method       | limit/base | current        | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  | 0          | 0              |          |          |
| Barium           | ppm      | ASTM D5185m  | 90         | <1             |          |          |
| Molybdenum       | ppm      | ASTM D5185m  | 0          | 0              |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | 0              |          |          |
| Magnesium        | ppm      | ASTM D5185m  | 100        | 24             |          |          |
| Calcium          | ppm      | ASTM D5185m  | 0          | 5              |          |          |
| Phosphorus       | ppm      | ASTM D5185m  | 0          | 2              |          |          |
| Zinc             | ppm      | ASTM D5185m  | 0          | 10             |          |          |
| Sulfur           | ppm      | ASTM D5185m  | 23500      | 19992          |          |          |
| CONTAMINANTS     |          | method       | limit/base | current        | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >25        | 2              |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | <1             |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 2              |          |          |
| Water            | %        | ASTM D6304   | >0.05      | <b>A</b> 0.105 |          |          |
| ppm Water        | ppm      | ASTM D6304   | >500       | <b>A</b> 1050  |          |          |
| FLUID CLEANLIN   | ESS      | method       | limit/base | current        | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   |            | 713            |          |          |
| Particles >6µm   |          | ASTM D7647   | >1300      | 389            |          |          |
| Particles >14µm  |          | ASTM D7647   | >80        | 66             |          |          |
| Particles >21µm  |          | ASTM D7647   | >20        | 22             |          |          |
| Particles >38µm  |          | ASTM D7647   | >4         | 3              |          |          |
| Particles >71µm  |          | ASTM D7647   | >3         | 0              |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >/17/13    | 17/16/13       |          |          |
| FLUID DEGRADA    | TION     | method       | limit/base | current        | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   | 1.0        | 0.42           |          |          |
|                  |          |              |            |                |          |          |




## **OIL ANALYSIS REPORT**





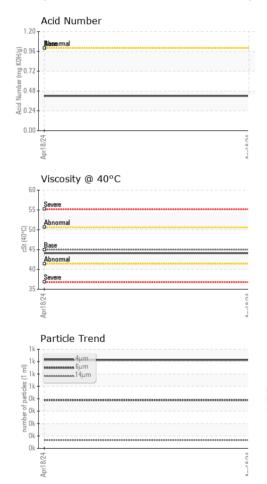

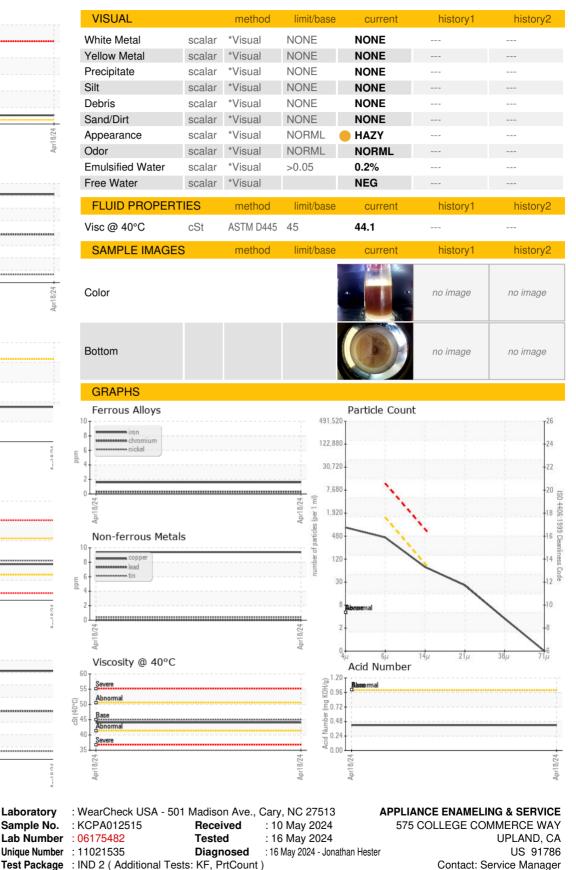

Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Laboratory

Sample No.

Contact/Location: Service Manager - APPUPL Page 2 of 2

T:

F: