


OIL ANALYSIS REPORT

Sample Rating Trend

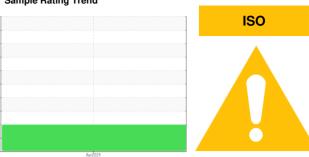

Machine Id

8342056 (S/N 1260) Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013314		
Sample Date		Client Info		20 Apr 2024		
Machine Age	hrs	Client Info		3430		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
					History	1113101 y 2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	1		
Copper	ppm	ASTM D5185m	>50	5		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	<1		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	51		
Calcium	ppm	ASTM D5185m	0	2		
Phosphorus	ppm	ASTM D5185m	0	<1		
Zinc	ppm	ASTM D5185m	0	20		
Sulfur	ppm	ASTM D5185m	23500	20497		
CONTAMINANTS		method	limit/base	current	history1	history2
					HISTORY	HISTOLYZ
Silicon	ppm	ASTM D5185m	>25	4		
Sodium	ppm	ASTM D5185m		8		
Potassium	ppm	ASTM D5185m	>20	6		
Water	%	ASTM D6304	>0.05	0.017		
ppm Water	ppm	ASTM D6304	>500	179		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		103679		
Particles >6µm		ASTM D7647	>1300	<u>\$1377</u>		
Particles >14μm		ASTM D7647	>80	▲ 6620		
Particles >21µm		ASTM D7647	>20	1830		
Particles >38µm		ASTM D7647	>4	4 33		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	4 24/23/20		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.42		
ACIO INGINDEI (AIN)	my NOT I/g	70 LINI D0040	1.0	U.72		



OIL ANALYSIS REPORT

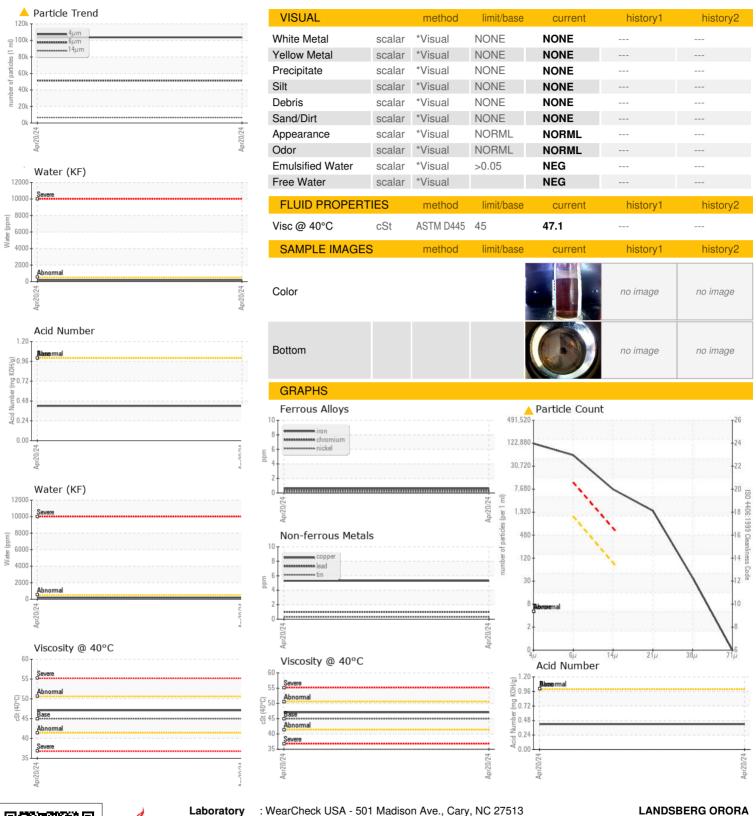





Certificate 12367

Laboratory Sample No.

Lab Number

: KCPA013314 : 06175485 Unique Number : 11021538

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 10 May 2024 **Tested**

Diagnosed

: 14 May 2024

: 14 May 2024 - Angela Borella

13397 MARLAY AVE FONTANA, CA US 92337 Contact: Service Manager

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: LANFON [WUSCAR] 06175485 (Generated: 05/14/2024 13:55:26) Rev: 1

T:

F: