




# OIL ANALYSIS REPORT

## Sample Rating Trend

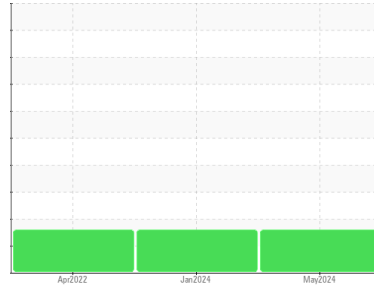

ISO



Machine Id  
**5752832 (S/N 1122)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) FG-460 (--- GAL)**

### DIAGNOSIS

#### ▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCPA013388</b>	KCPA006531	KCP44904
Sample Date	Client Info			<b>06 May 2024</b>	12 Jan 2024	01 Apr 2022
Machine Age	hrs	Client Info		<b>39320</b>	36763	24582
Oil Age	hrs	Client Info		<b>0</b>	0	317
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	Not Chngd
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>1</b>	0	1
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>10</b>	3	2
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>4</b>	3	8
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>4</b>	0	18
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>5</b>	<1	40
Calcium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Phosphorus	ppm	ASTM D5185m	500	<b>392</b>	110	8
Zinc	ppm	ASTM D5185m		<b>234</b>	68	21
Sulfur	ppm	ASTM D5185m		<b>3471</b>	1186	16737

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	<1
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	10
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	6
Water	%	ASTM D6304	>0.05	<b>0.004</b>	0.003	0.014
ppm Water	ppm	ASTM D6304	>500	<b>47</b>	34	141.5

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>15610</b>	9217	16088
Particles >6µm		ASTM D7647	>1300	▲ <b>2932</b>	▲ 2910	▲ 4480
Particles >14µm		ASTM D7647	>80	● <b>148</b>	▲ 434	▲ 390
Particles >21µm		ASTM D7647	>20	▲ <b>41</b>	▲ 108	▲ 128
Particles >38µm		ASTM D7647	>4	<b>3</b>	1	▲ 11
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ <b>21/19/14</b>	▲ 20/19/16	▲ 19/16

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	<b>1.13</b>	0.35	0.40


# OIL ANALYSIS REPORT

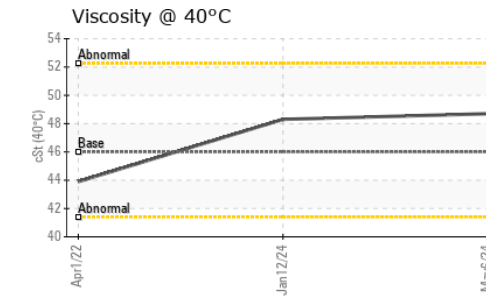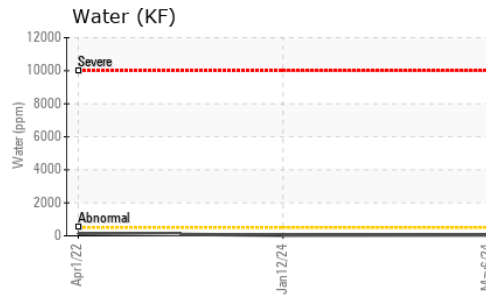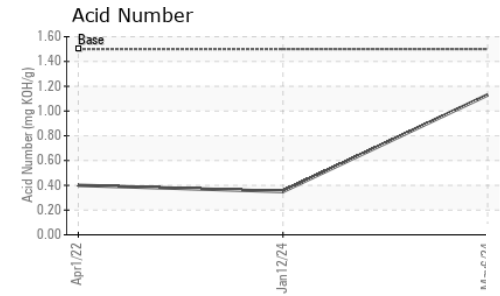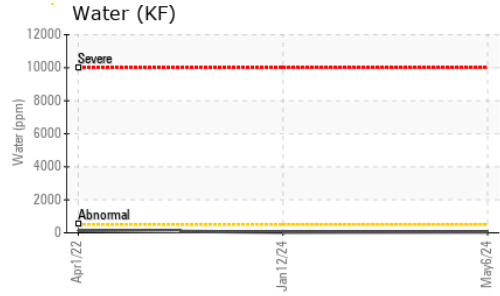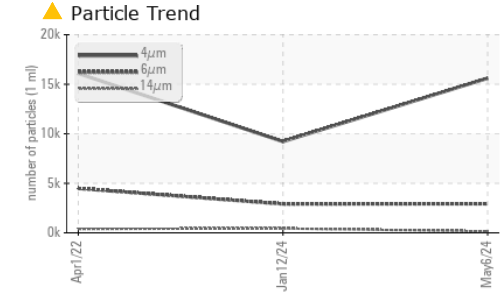






PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	48.7	48.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

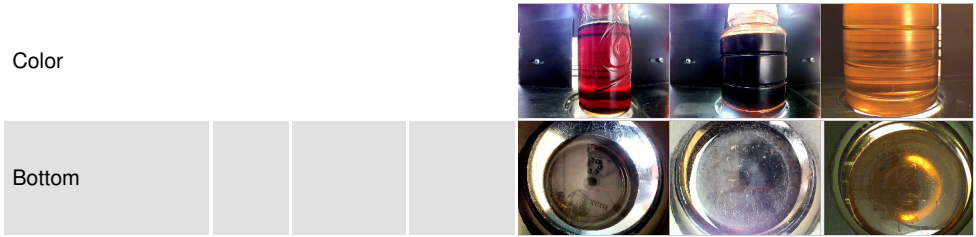

## GRAPHS

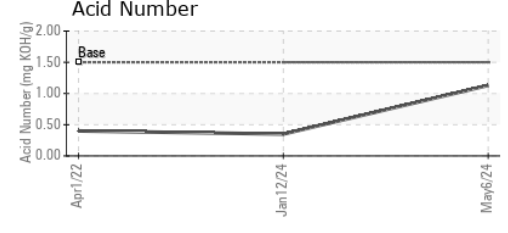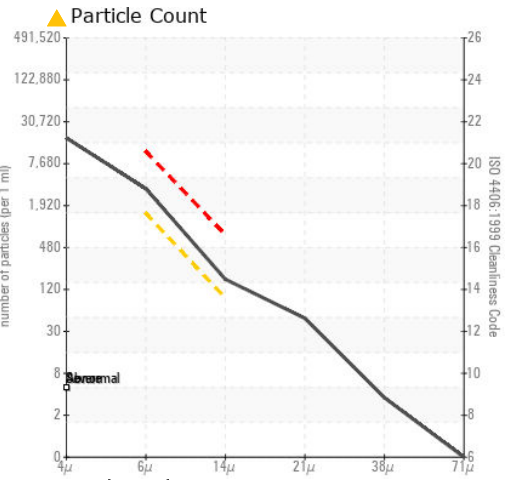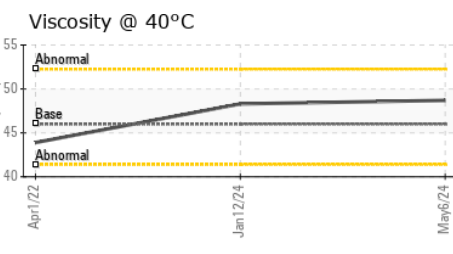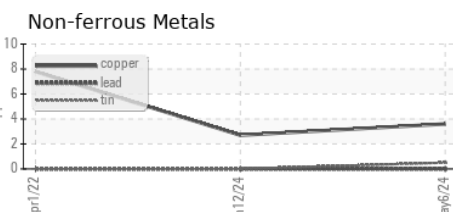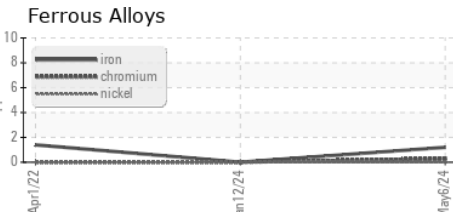

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA013388 **Received** : 10 May 2024  
**Lab Number** : 06175492 **Tested** : 14 May 2024  
**Unique Number** : 11021545 **Diagnosed** : 14 May 2024 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**COAST PACKING CO**  
 3275 E VERNON AVE  
 VERNON, CA  
 US 90058  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)