


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



7 QUINCY (S/N 9108J)

Component Compressor

USPI MAX FG AIR 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		b2017 Feb2	018 Feb2019 Jan2020	Feb2021 Jan2022 Jan202	8 Feb2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM36107	USPM30932	USPM31136
Sample Date		Client Info		06 May 2024	06 Feb 2024	31 Oct 2023
Machine Age	hrs	Client Info		35736	0	34261
Oil Age	hrs	Client Info		636	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	0
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	<1	0	<1
Calcium	ppm	ASTM D5185m	0	<1	0	<1
Phosphorus	ppm	ASTM D5185m	0	0	0	<1
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	0	0	0	4
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.1	0.006	0.004	0.008
ppm Water	ppm	ASTM D6304	>1000	62	47	80.2
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	788		2951
Particles >6µm		ASTM D7647	>2500	52		199
Particles >14µm		ASTM D7647	>320	6		5
Particles >21µm		ASTM D7647	>80	2		1
Particles >38µm		ASTM D7647	>20	0		0
Particles >71µm		ASTM D7647	>4	0		0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/13/10		19/15/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.16	0.12	0.17	0.20





OIL ANALYSIS REPORT

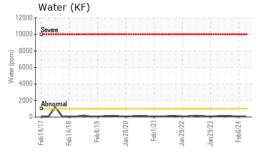


10k - 500	4μr 6μr	n n					
8k -	14 _j ,	m					
6k -							
4k - A					A		
2k-			1	1	1		1
Ok was	La comment		-	- Lun	1/1		-
Feb14/17	eb14/18	Feb8/19	Jan28/20	Feb 1/21	Jan29/22	Jan29/23	Feb6/24

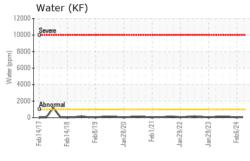





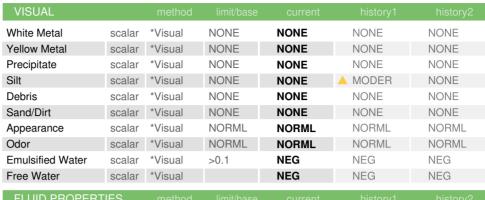


I LOID I HOI LITT	ILO	memou			History	HISTOLYZ
Visc @ 40°C	cSt	ASTM D445	45.8	51.3	50.6	52.5

|--|

Color

Bottom



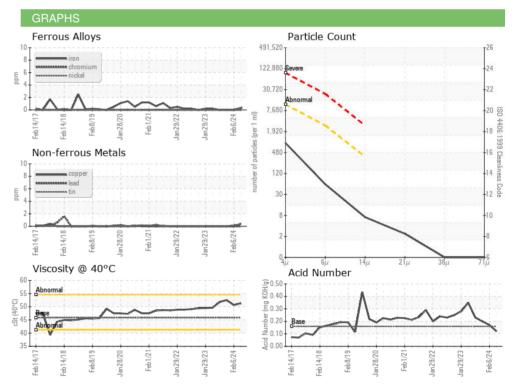





Certificate 12367

Laboratory Sample No.

Lab Number : 06175508

Test Package : IND 2

: USPM36107 Unique Number : 11021561

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 10 May 2024 **Tested** : 13 May 2024

: 13 May 2024 - Doug Bogart Diagnosed

CONAGRA FOODS - WATERLOO

2701 MIDPORT BLVD WATERLOO, IA

US 50703 Contact:

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)