



# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**



Machine Id

## FREIGHTLINER 1170

Component

**Transmission (Manual)**

Fluid

**CHEVRON SYNTHETIC AMT AUTO 75W90 XDT (--- LTR)**

### DIAGNOSIS

#### ▲ Recommendation

The fluid change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### ▲ Wear

The aluminum level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the fluid.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0733182</b>	---	---
Sample Date	Client Info		<b>11 May 2024</b>	---	---
Machine Age	mls	Client Info	<b>594574</b>	---	---
Oil Age	mls	Client Info	<b>300000</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>86</b>	---	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >7	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>▲ 40</b>	---	---
Lead	ppm	ASTM D5185m >45	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >225	<b>18</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>7</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>131</b>	---	---
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>14</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m	<b>88</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>1037</b>	---	---
Zinc	ppm	ASTM D5185m	<b>35</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>18588</b>	---	---

### CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.78</b>	---	---



# OIL ANALYSIS REPORT

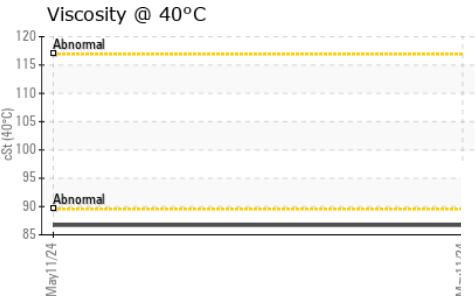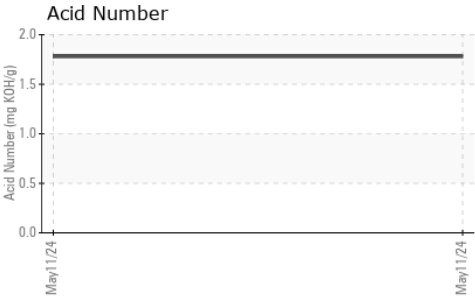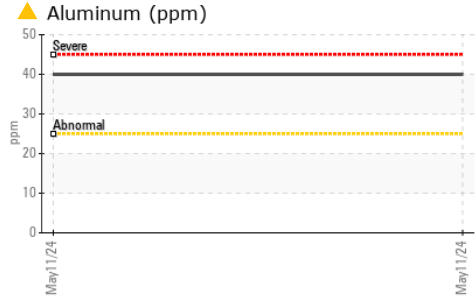








VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	86.7	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

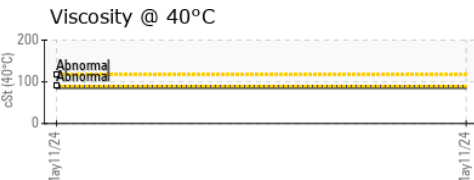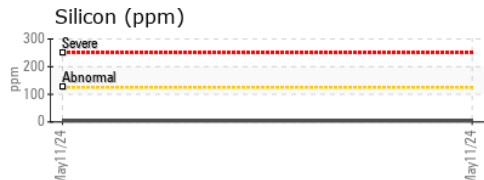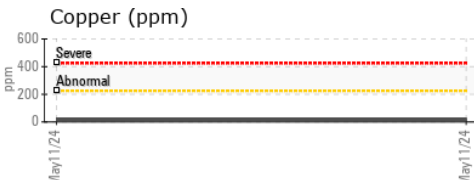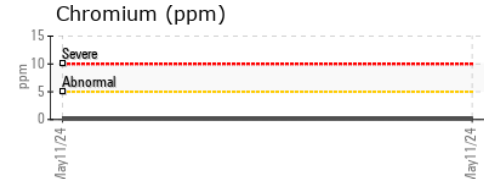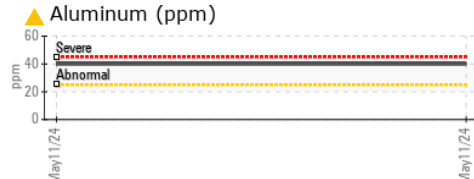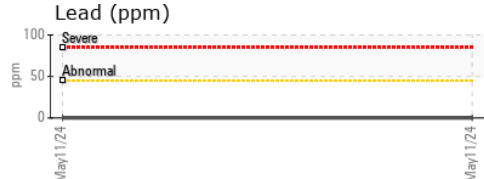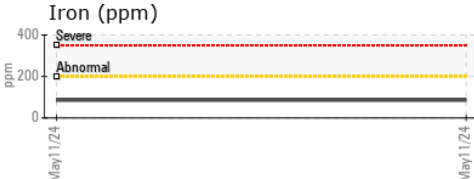

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0733182      **Received** : 10 May 2024  
**Lab Number** : 06175678      **Tested** : 14 May 2024  
**Unique Number** : 11021731      **Diagnosed** : 14 May 2024 - Don Baldrige  
**Test Package** : MOB 2

**LYNDEN TRANSPORT - SPRUCE GROVE**  
 27340 ACHESON RD, ACHESON INDUSTRIAL PARK  
 ACHESON, AB  
 CA T7X 6B1  
 Contact: Mathieu Carby  
 mcarby@lynden.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)