


OIL ANALYSIS REPORT

[RW0003600]

Haitian MA II 10000/8400 (S/N 201705100034181)

Hydraulic System

AW HYDRAULIC OIL ISO 46 (1480 LTR)



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RW0003600		
Sample Date		Client Info		07 May 2024		
Machine Age	days	Client Info		1245941		
Oil Age	days	Client Info		1245937		
Oil Changed		Client Info		Oil Added		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	2		
Copper	ppm	ASTM D5185m	>20	15		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	25	2		
Calcium	ppm	ASTM D5185m	200	56		
Phosphorus	ppm	ASTM D5185m	300	335		
Zinc	ppm	ASTM D5185m	370	427		
Sulfur	ppm	ASTM D5185m	2500	1099		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	NEG		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<u>▲</u> 50291		
Particles >6μm		ASTM D7647	>1300	▲ 8023		
Particles >14µm		ASTM D7647	>160	<u>▲</u> 324		
Particles >21µm		ASTM D7647	>40	<u>^</u> 86		
Particles >38µm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>23/20/16</u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.23		



OIL ANALYSIS REPORT

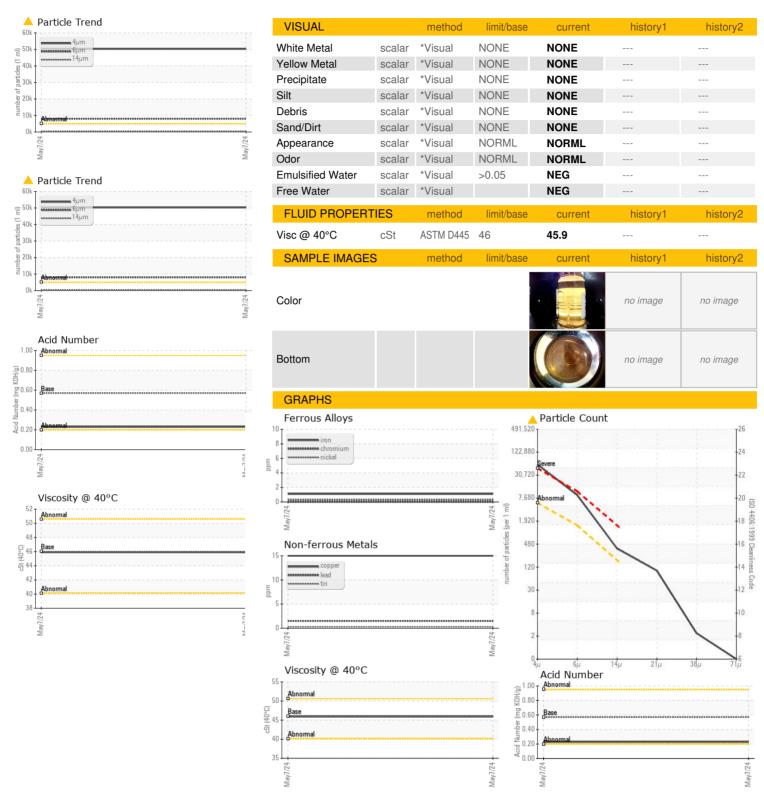





Certificate 12367

Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number : 06176071 Unique Number : 11022124 Test Package : PLANT

: RW0003600

Received : 10 May 2024 **Tested**

: 14 May 2024 Diagnosed : 14 May 2024 - Don Baldridge

US 48631 Contact: ANDREW ROZNOWSKI ayeare15z@gmail.com

SAGINAW BAY PLASTICS

2768 S HURON RD

KAWKAWLIN, MI

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T:

F: