

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 6254092

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012462	KCP36346	
Sample Date		Client Info		07 May 2024	28 Sep 2021	
Machine Age	hrs	Client Info		18490	8053	
Oil Age	hrs	Client Info		1672	2700	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum		ASTM D5185m	>10	0	<1	
	ppm			0	< 1	
Lead	ppm	ASTM D5185m	>10	-		
Copper	ppm	ASTM D5185m		3	6	
Tin	ppm	ASTM D5185m	>10	<1	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	<1	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	2	34	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	0	11	
Zinc	ppm	ASTM D5185m	0	13	5	
Sulfur	ppm	ASTM D5185m	23500	23421	16269	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	9	
Sodium	ppm	ASTM D5185m		2	8	
Potassium	ppm	ASTM D5185m	>20	0	0	
Water	%	ASTM D6304	>0.05	0.008	0.018	
ppm Water	ppm	ASTM D6304	>500	84	182.6	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1091	9393	
Particles >6µm		ASTM D7647	>1300	240	2380	
Particles >14µm		ASTM D7647	>80	16	64	
Particles >21µm		ASTM D7647		5	14	
		ASTM D7647	>4	1	0	
Particles >38um						
		ASTM D7647	>3	0		
Particles >71µm		ASTM D7647 ISO 4406 (c)	>3 >/17/13	0 17/15/11	0 18/13	
Particles >38μm Particles >71μm Oil Cleanliness FLUID DEGRADA						


Report Id: SUTSAN [WUSCAR] 06176122 (Generated: 05/14/2024 10:01:59) Rev: 1

Contact/Location: ISAAC C. - SUTSAN



OIL ANALYSIS REPORT

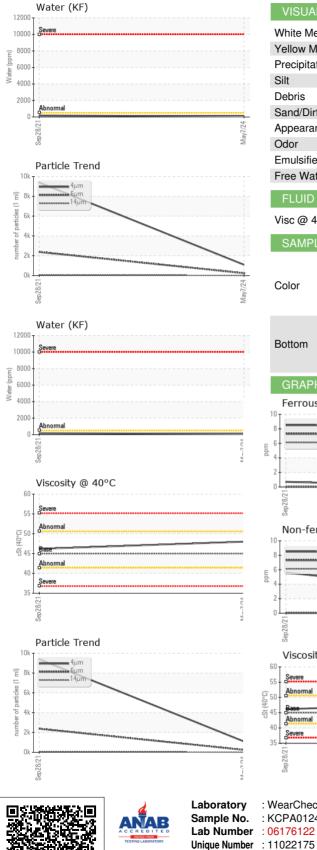

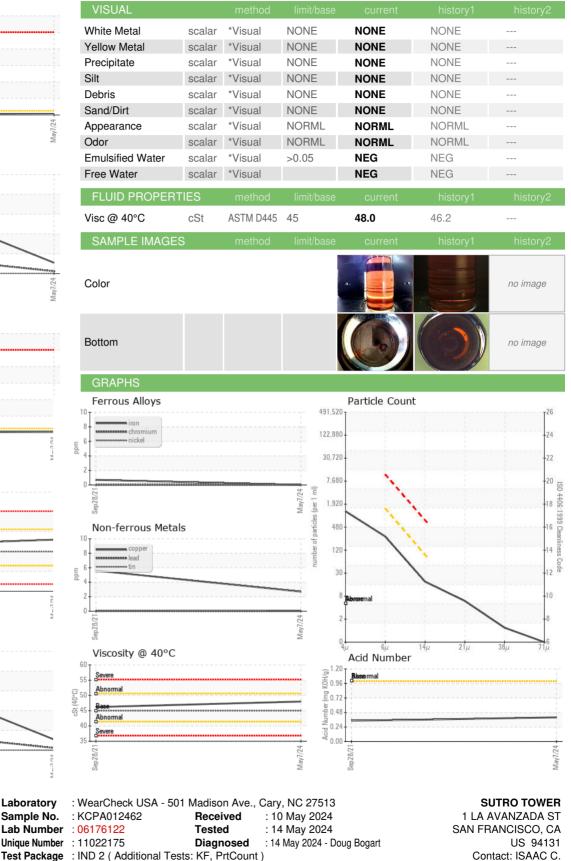

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: SUTSAN [WUSCAR] 06176122 (Generated: 05/14/2024 10:01:59) Rev: 1

Certificate 12367

Contact/Location: ISAAC C. - SUTSAN Page 2 of 2

isaacc@sutrotower.com

T:

F: