




# OIL ANALYSIS REPORT

Sample Rating Trend

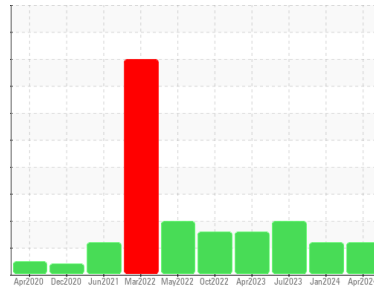

ISO



Machine Id  
**KAESER BSD 50 6819450 (S/N 2070)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC128428</b>	KC122658	KC122808
Sample Date	Client Info			<b>22 Apr 2024</b>	30 Jan 2024	31 Jul 2023
Machine Age	hrs	Client Info		<b>41749</b>	39776	35793
Oil Age	hrs	Client Info		<b>5955</b>	0	0
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	N/A
Sample Status				<b>ATTENTION</b>	ATTENTION	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>9</b>	9	3
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	90	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185m	2	<b>0</b>	1	0
Phosphorus	ppm	ASTM D5185m		<b>&lt;1</b>	2	28
Zinc	ppm	ASTM D5185m		<b>0</b>	0	4

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	6	19
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	1
Water	%	ASTM D6304	>0.05	<b>0.006</b>	0.007	0.005
ppm Water	ppm	ASTM D6304	>500	<b>61</b>	79	58.0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>2992</b>	3803	4048
Particles >6µm		ASTM D7647	>1300	<b>807</b>	1128	▲ 1991
Particles >14µm		ASTM D7647	>80	● <b>84</b>	● 123	▲ 328
Particles >21µm		ASTM D7647	>20	● <b>22</b>	● 42	▲ 115
Particles >38µm		ASTM D7647	>4	<b>0</b>	4	▲ 10
Particles >71µm		ASTM D7647	>3	<b>0</b>	1	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	● <b>19/17/14</b>	● 19/17/14	▲ 19/18/16

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.41</b>	0.39	0.39


# OIL ANALYSIS REPORT

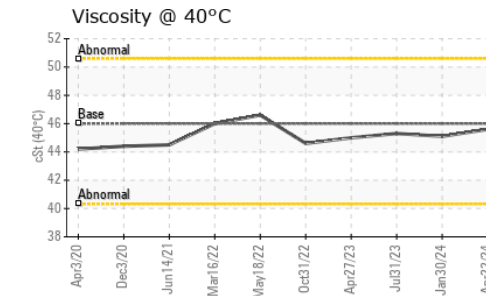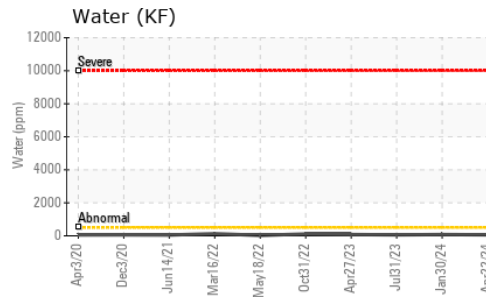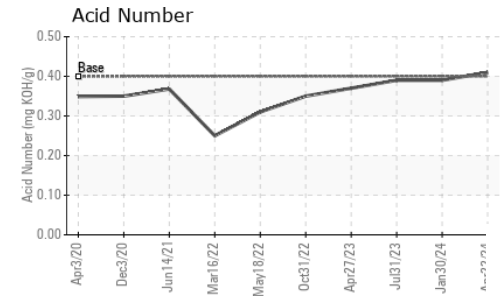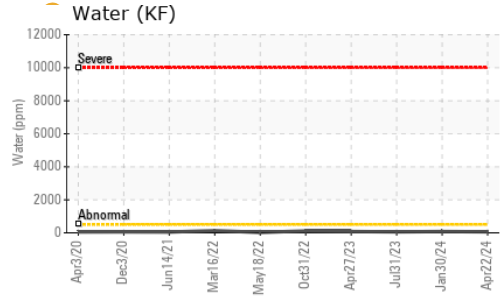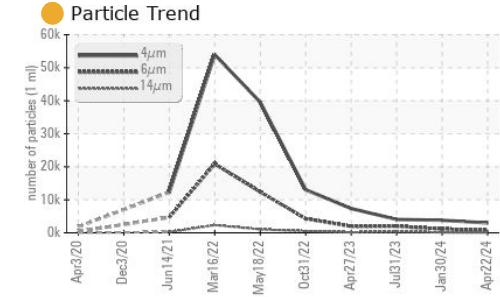





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.6	45.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

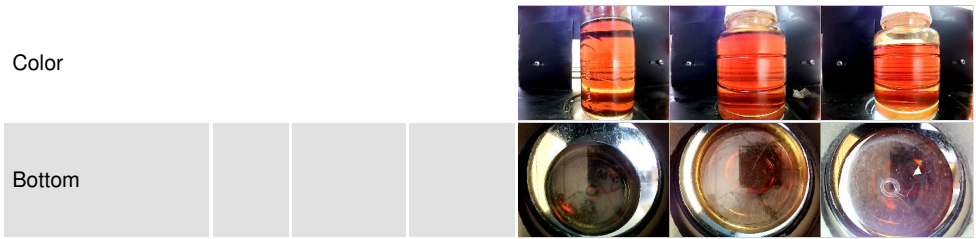

## GRAPHS

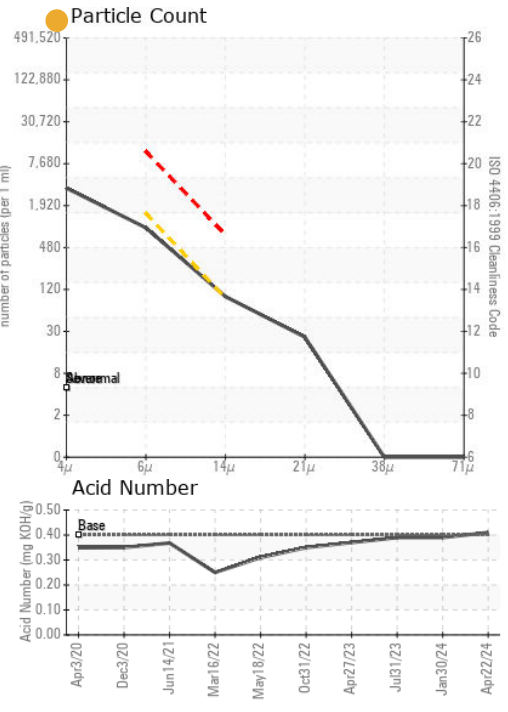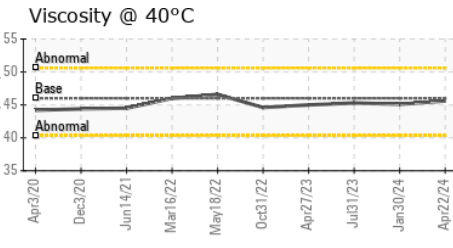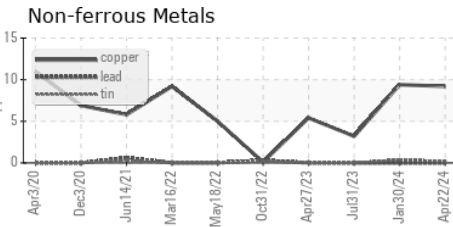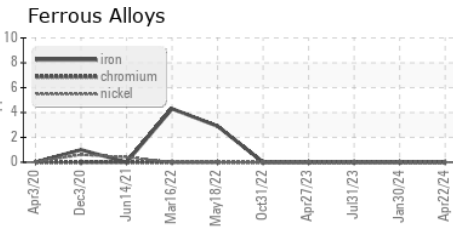

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC128428  
**Lab Number** : 06176128  
**Unique Number** : 11022181  
**Test Package** : IND 2  
**Received** : 10 May 2024  
**Tested** : 14 May 2024  
**Diagnosed** : 14 May 2024 - Doug Bogart

**TREMOR GROUP**  
 1030 AIRPORT RD  
 LAKELAND, FL  
 US 33802  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)