


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

KAESER CSD75 6347521 (S/N 1438)

Component Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

	G١		

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jun2018 A	pr2019 Mar2020 Dec	020 Sep2021 Mar2023 I	Dec2023	
SAMPLE INFORM	//ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016935	KC124257	KC05919260
Sample Date		Client Info		29 Apr 2024	18 Dec 2023	28 Jul 2023
Machine Age	hrs	Client Info		53166	50020	46594
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	5	6
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	0	6	3
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		7	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		73	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m	500	0	57	50
Zinc	ppm	ASTM D5185m		1	0	13
Sulfur	ppm	ASTM D5185m		24154	765	780
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		16	3	0
Potassium	ppm	ASTM D5185m	>20	<1	2	<1
Water	%	ASTM D6304	>0.05	0.036	0.007	0.013
opm Water	ppm	ASTM D6304	>500	369	73	137.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		1513		
Particles >6µm		ASTM D7647		490		
Particles >14μm		ASTM D7647	>80	59		
Particles >21µm		ASTM D7647	>20	14		
Particles >38μm		ASTM D7647	>4	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/13		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	0.39	0.23	0.30





OIL ANALYSIS REPORT

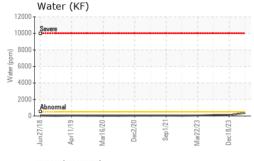




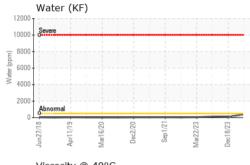






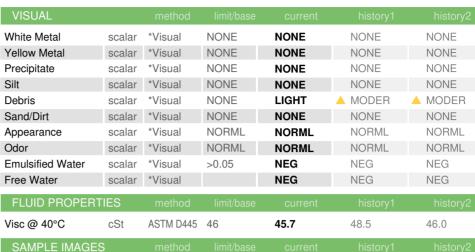

Color **Bottom**





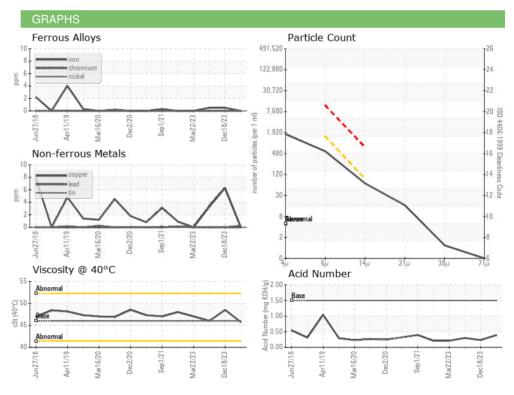



Laboratory Sample No.

Lab Number Unique Number : 11022188

: KCPA016935 : 06176135

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 10 May 2024 Tested

Diagnosed

: 14 May 2024 : 14 May 2024 - Doug Bogart

SWEET ADDITIONS 612 S 8TH ST CAMERON, WI US 54822 Contact: Service Manager

Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: