


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 349F 6115 (S/N HPD00640)
Component
Diesel Engine
Fluid
TULCO LUBSOIL CK-4 15W40 (--- GAL)

Sample Rating Trend

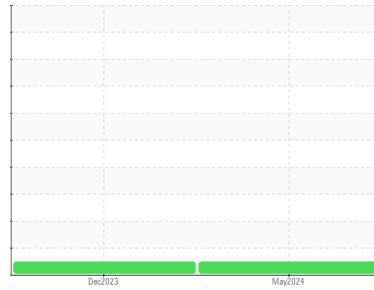

NORMAL

DIAGNOSIS

- Recommendation**
Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is no indication of any contamination in the oil.
- Fluid Condition**
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO10003396	TO10002991	---
Sample Date	Client Info			06 May 2024	18 Dec 2023	---
Machine Age	hrs	Client Info		7903	7585	---
Oil Age	hrs	Client Info		318	476	---
Oil Changed	Client Info			Not Chngd	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	15	22	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	1	2	---
Lead	ppm	ASTM D5185m	>40	<1	2	---
Copper	ppm	ASTM D5185m	>330	2	4	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		10	23	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m	65	67	68	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	1060	963	783	---
Calcium	ppm	ASTM D5185m	1140	1208	1319	---
Phosphorus	ppm	ASTM D5185m	1170	1139	951	---
Zinc	ppm	ASTM D5185m	1230	1344	1210	---
Sulfur	ppm	ASTM D5185m	3130	3993	3046	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	6	---
Sodium	ppm	ASTM D5185m		4	2	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	11.5	12.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.4	25.5	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.7	21.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.8	9.31	9.52	---









OIL ANALYSIS REPORT

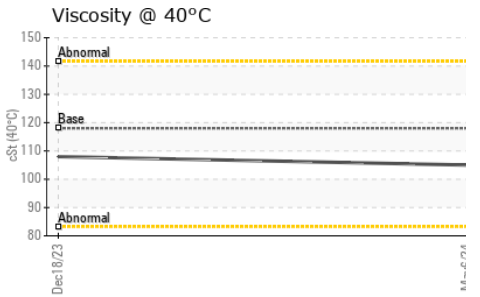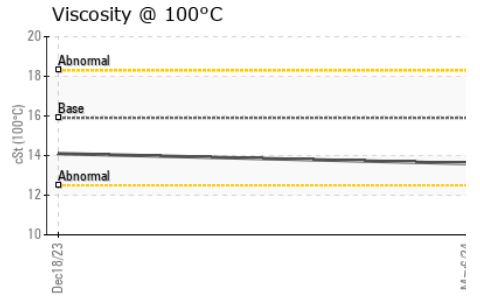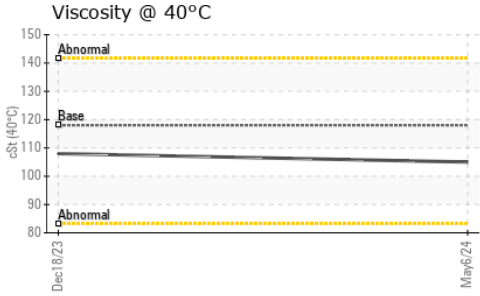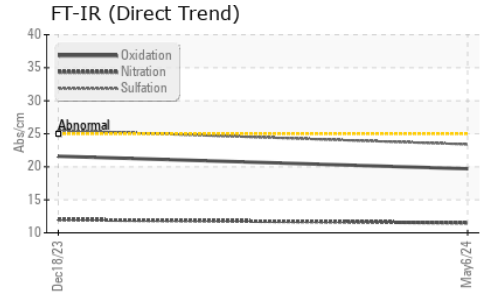

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	118	105	108
Visc @ 100°C	cSt	ASTM D445	15.9	13.6	14.1
Viscosity Index (VI)	Scale	ASTM D2270	143	128	131

GRAPHS

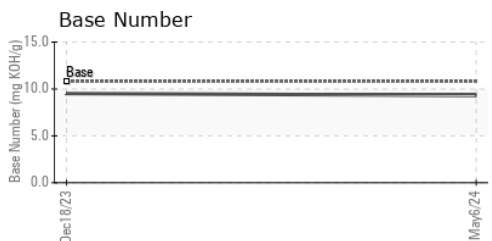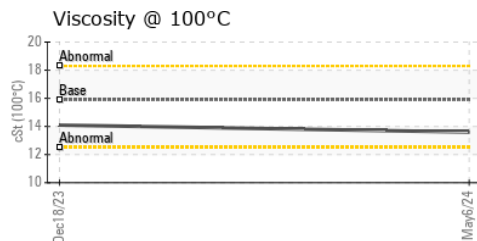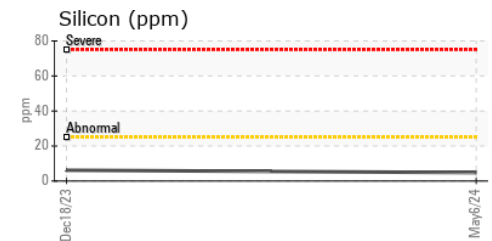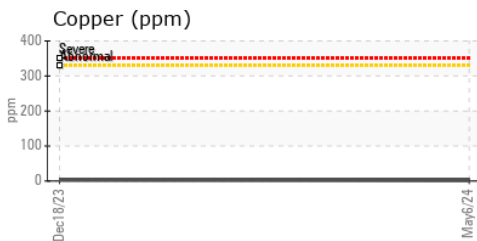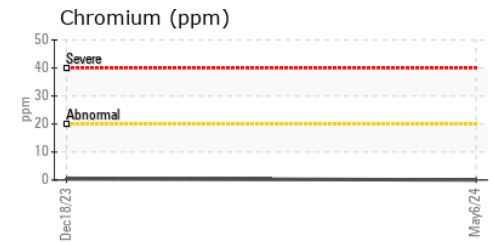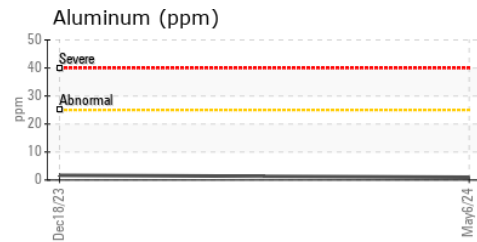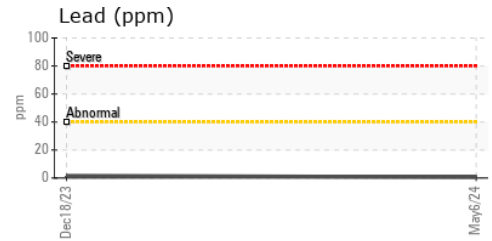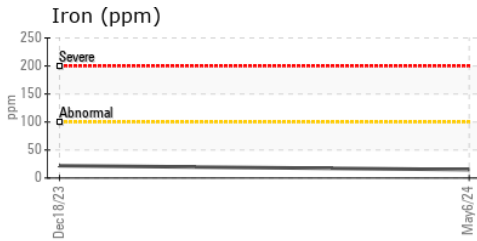

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003396
Lab Number : 06176204
Unique Number : 11022257
Test Package : MOB 2 (Additional Tests: KV40, VI)

Received : 10 May 2024
Tested : 13 May 2024
Diagnosed : 13 May 2024 - Wes Davis

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137

Contact: SKIP SAENGERHAUSEN
 skip@anchorstoneco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (918)928-4575

F: