

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id **NRL-550** Component **Hoisting Gearbox** Fluid **{not provided} (--- GAL)**

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|--------|-------------|------------|------------------|---------------|--------------|
| Sample Number | | Client Info | | DC0036881 | | |
| Sample Date | | Client Info | | 02 May 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATION | ١ | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.2 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 11 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | | <1 | | |
| Lead | ppm | ASTM D5185m | | 0 | | |
| Copper | ppm | ASTM D5185m | | 9 | | |
| Tin | ppm | ASTM D5185m | | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 86 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | | 0 | | |
| Calcium | ppm | ASTM D5185m | | 61 | | |
| Phosphorus | ppm | ASTM D5185m | | 188 | | |
| Zinc | ppm | ASTM D5185m | | 7 | | |
| Sulfur | ppm | ASTM D5185m | | 2959 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | | 2 | | |
| Sodium | ppm | ASTM D5185m | | 2 | | |
| Potassium | ppm | ASTM D5185m | >20 | 2 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | | |
| Free Water | scalar | *Visual | | NEG | | |
| 8:29:01) Rev: 1 | | | C | Contact/Location | : JASON WILDI | E - CRAASHMA |



OIL ANALYSIS REPORT



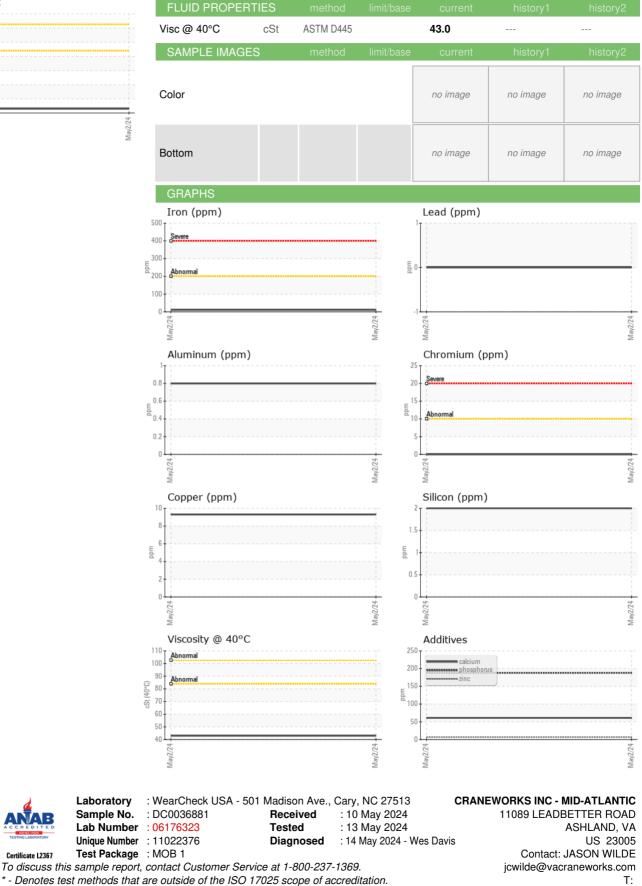

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: CRAASHMA [WUSCAR] 06176323 (Generated: 05/30/2024 08:29:01) Rev: 1

Certificate 12367

Contact/Location: JASON WILDE - CRAASHMA

F: